

FIG. 1

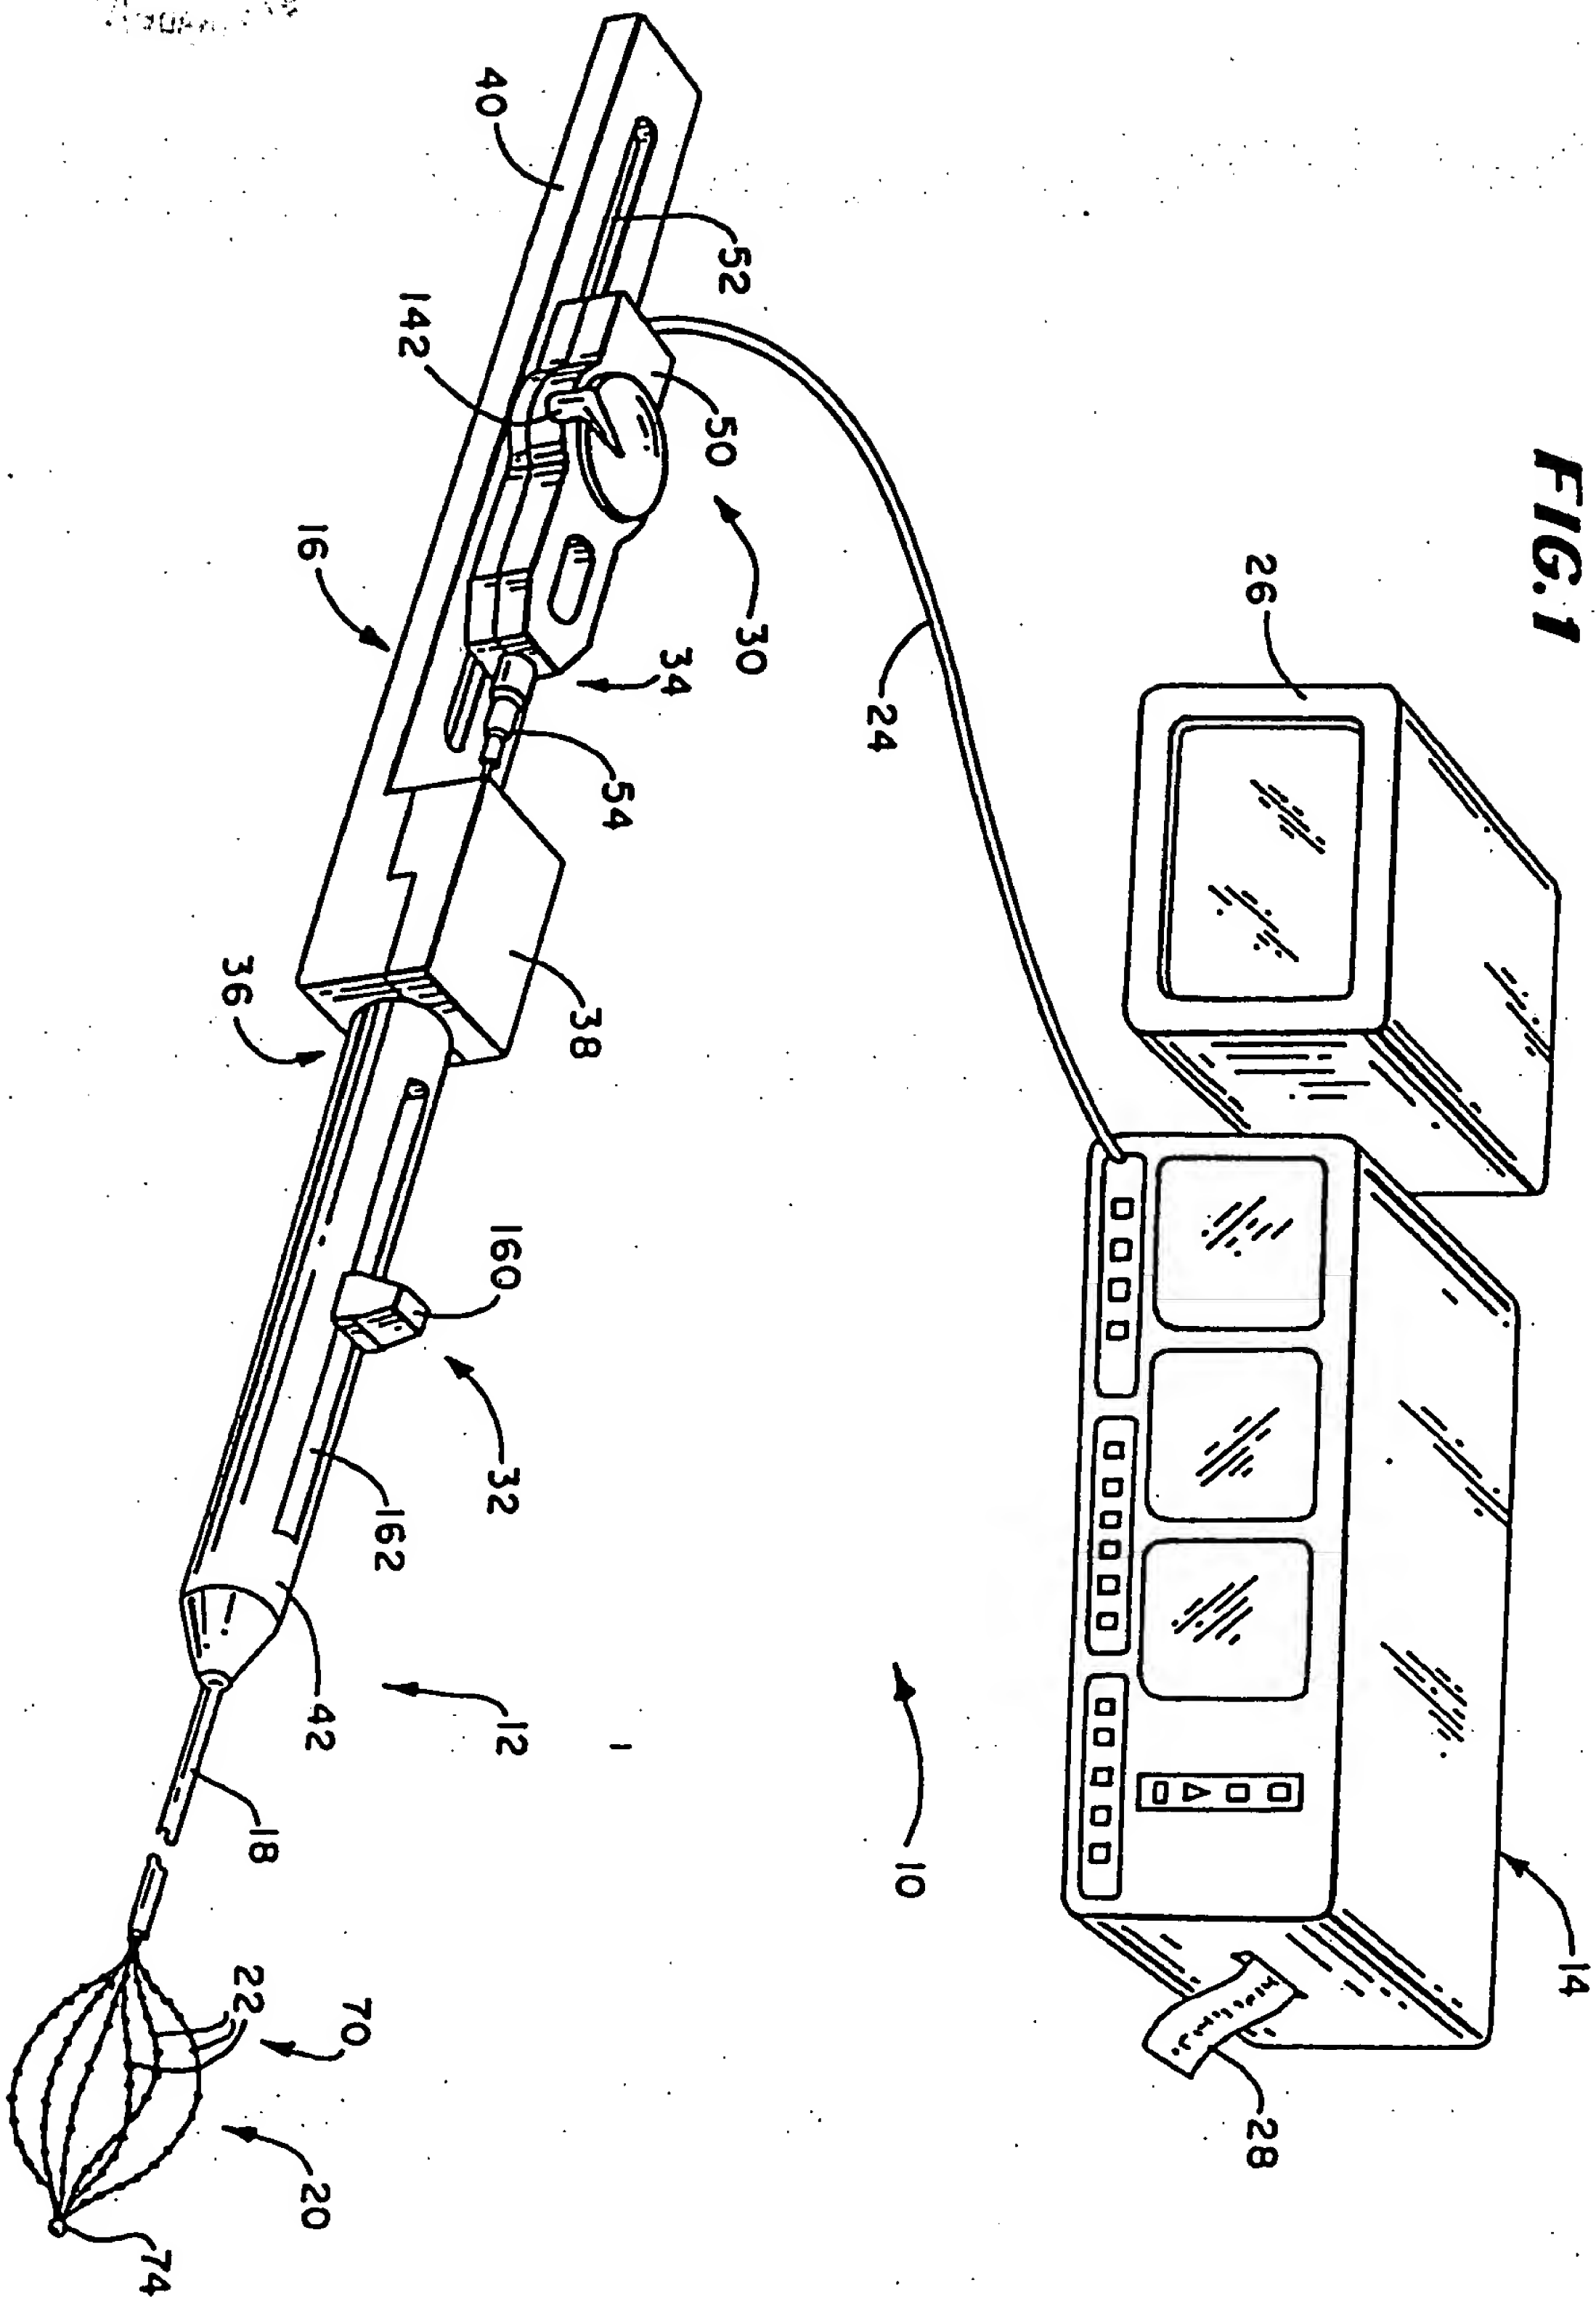


FIG. 2

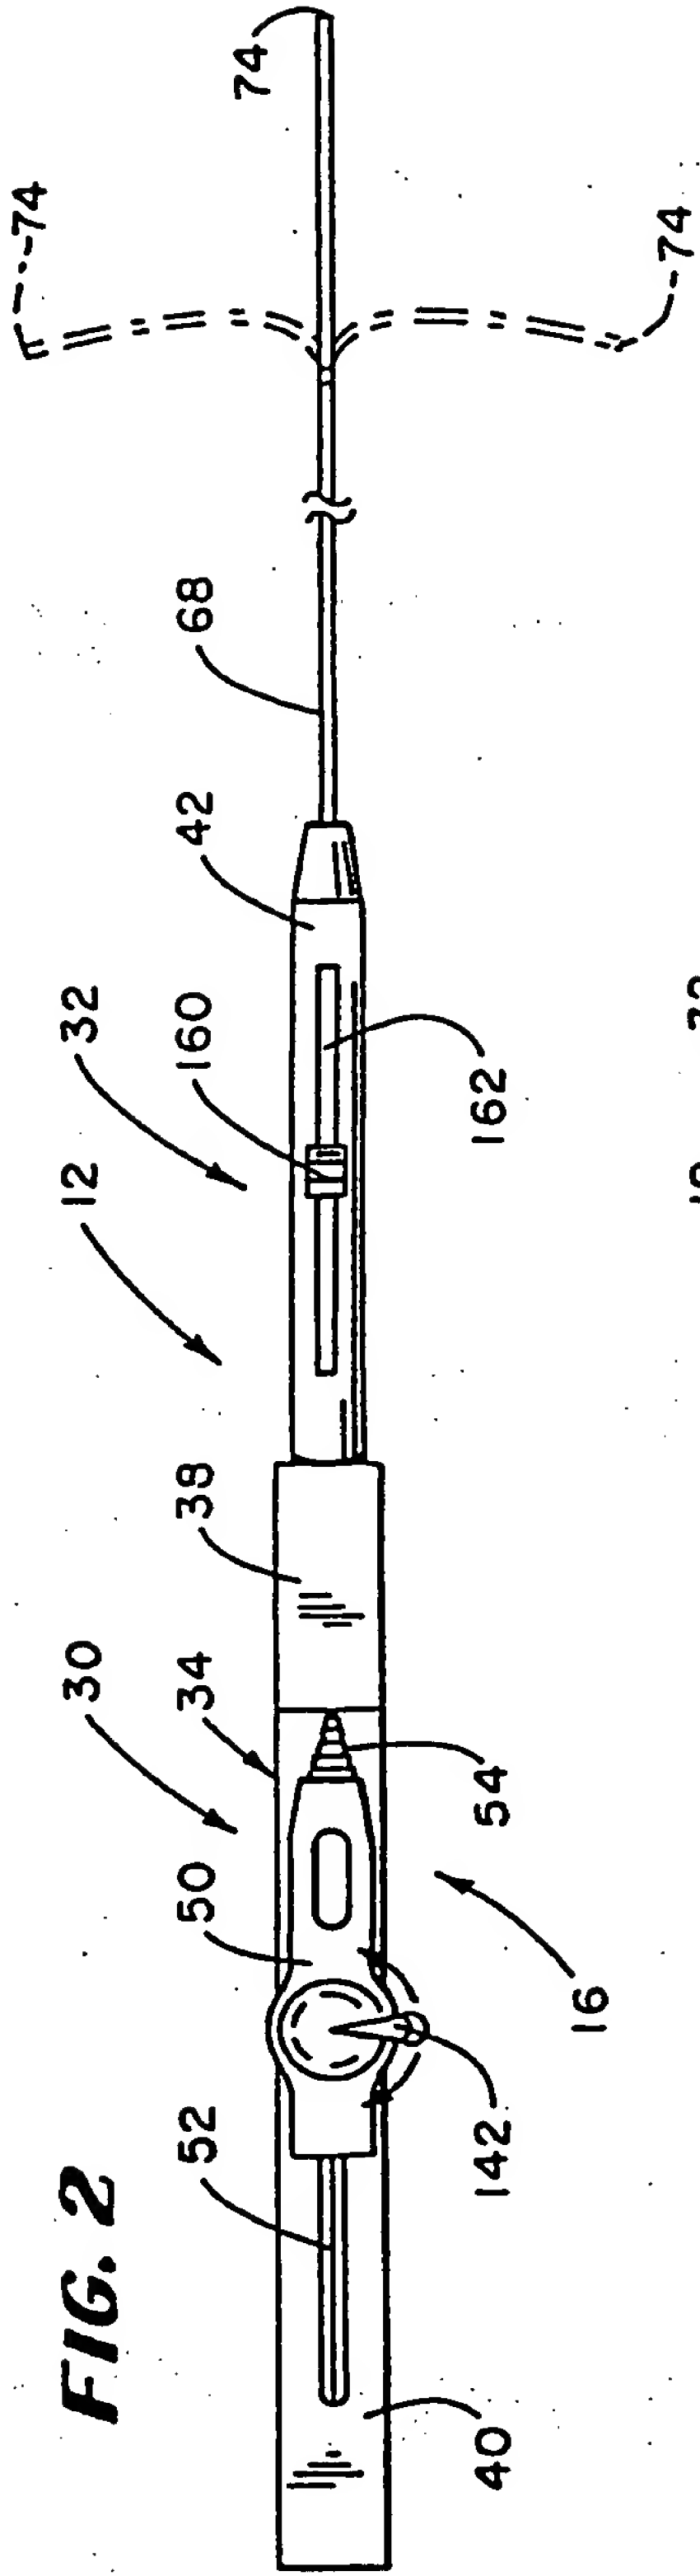


FIG. 3

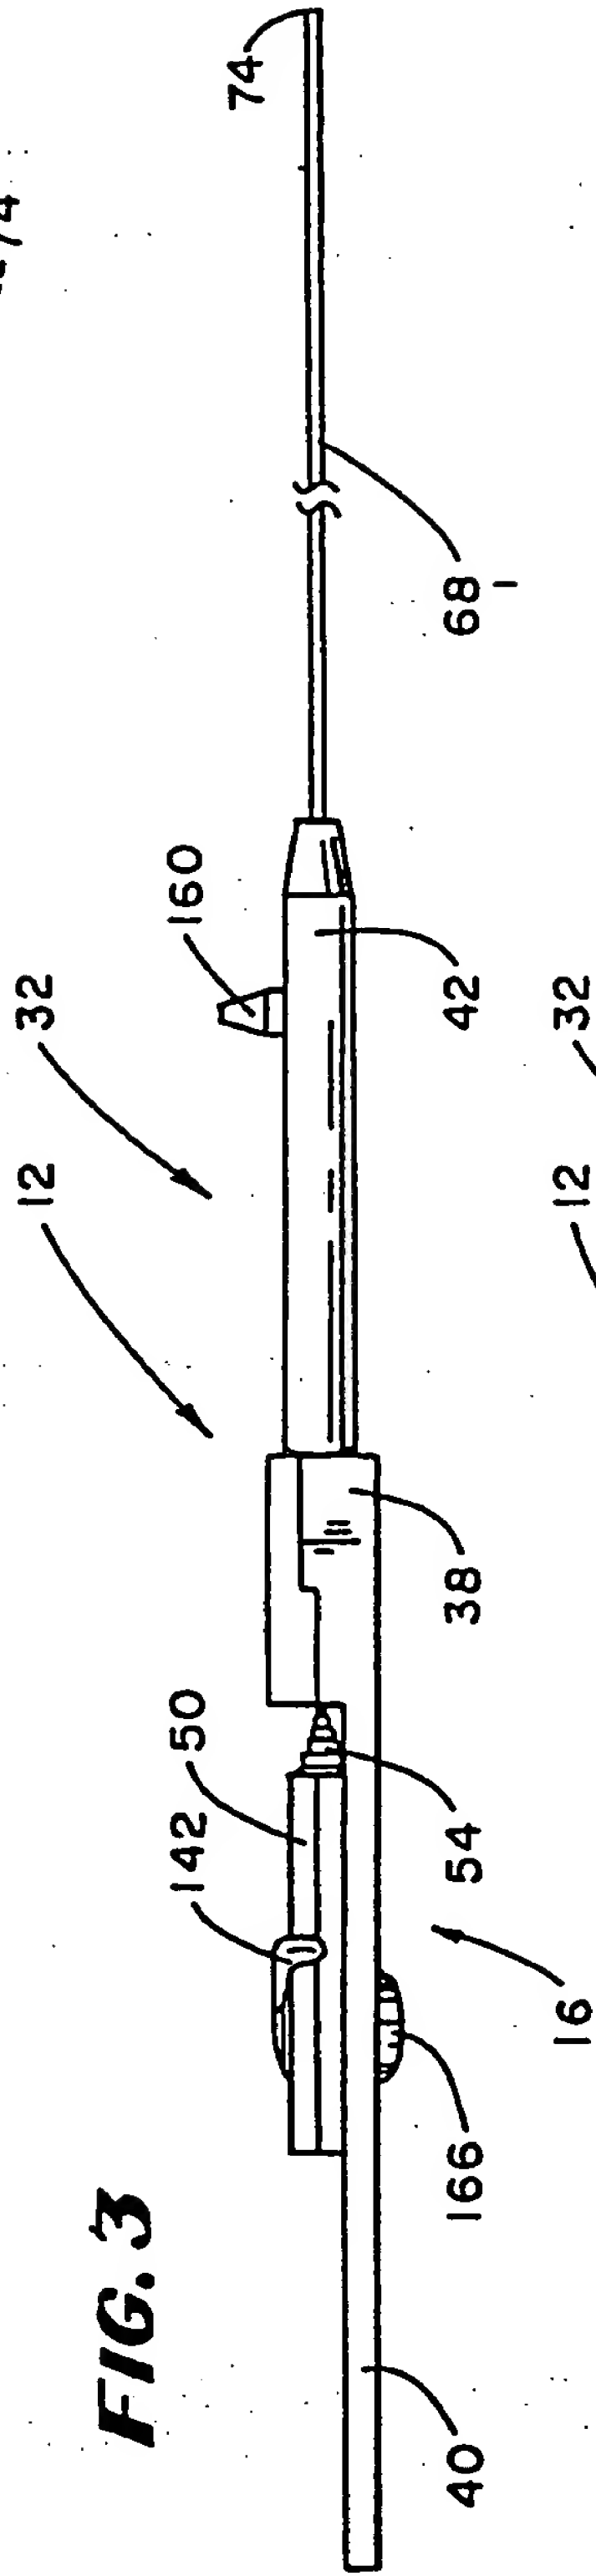


FIG. 4

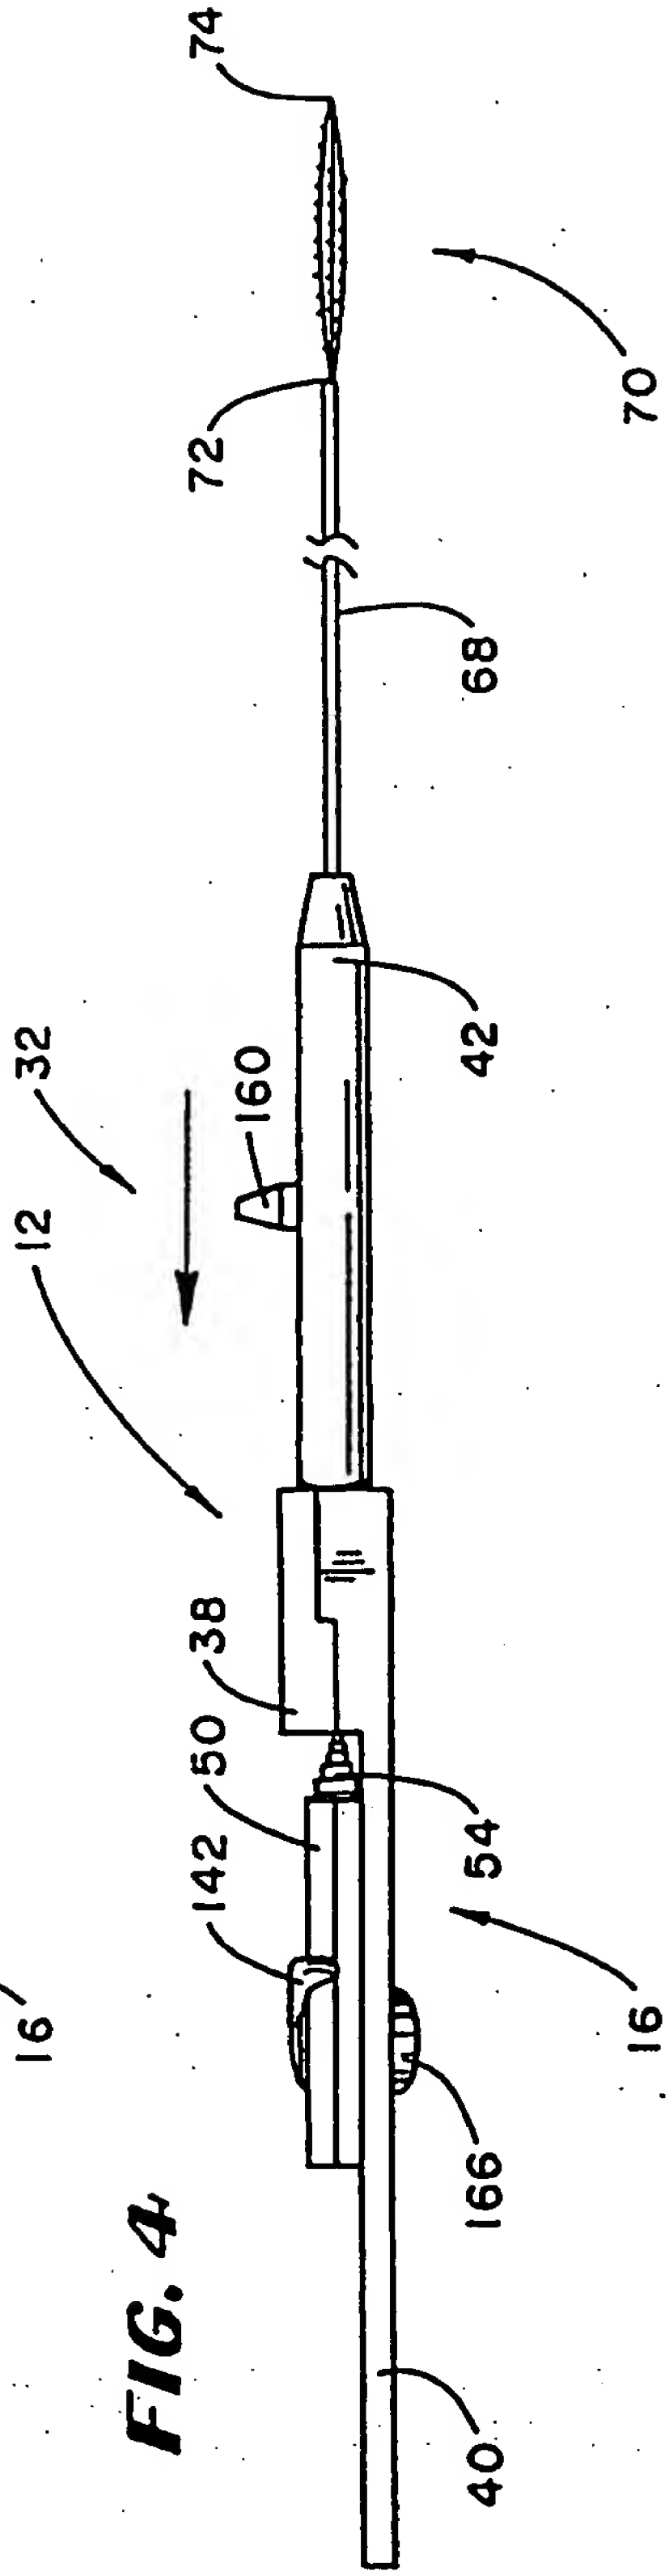


FIG. 5

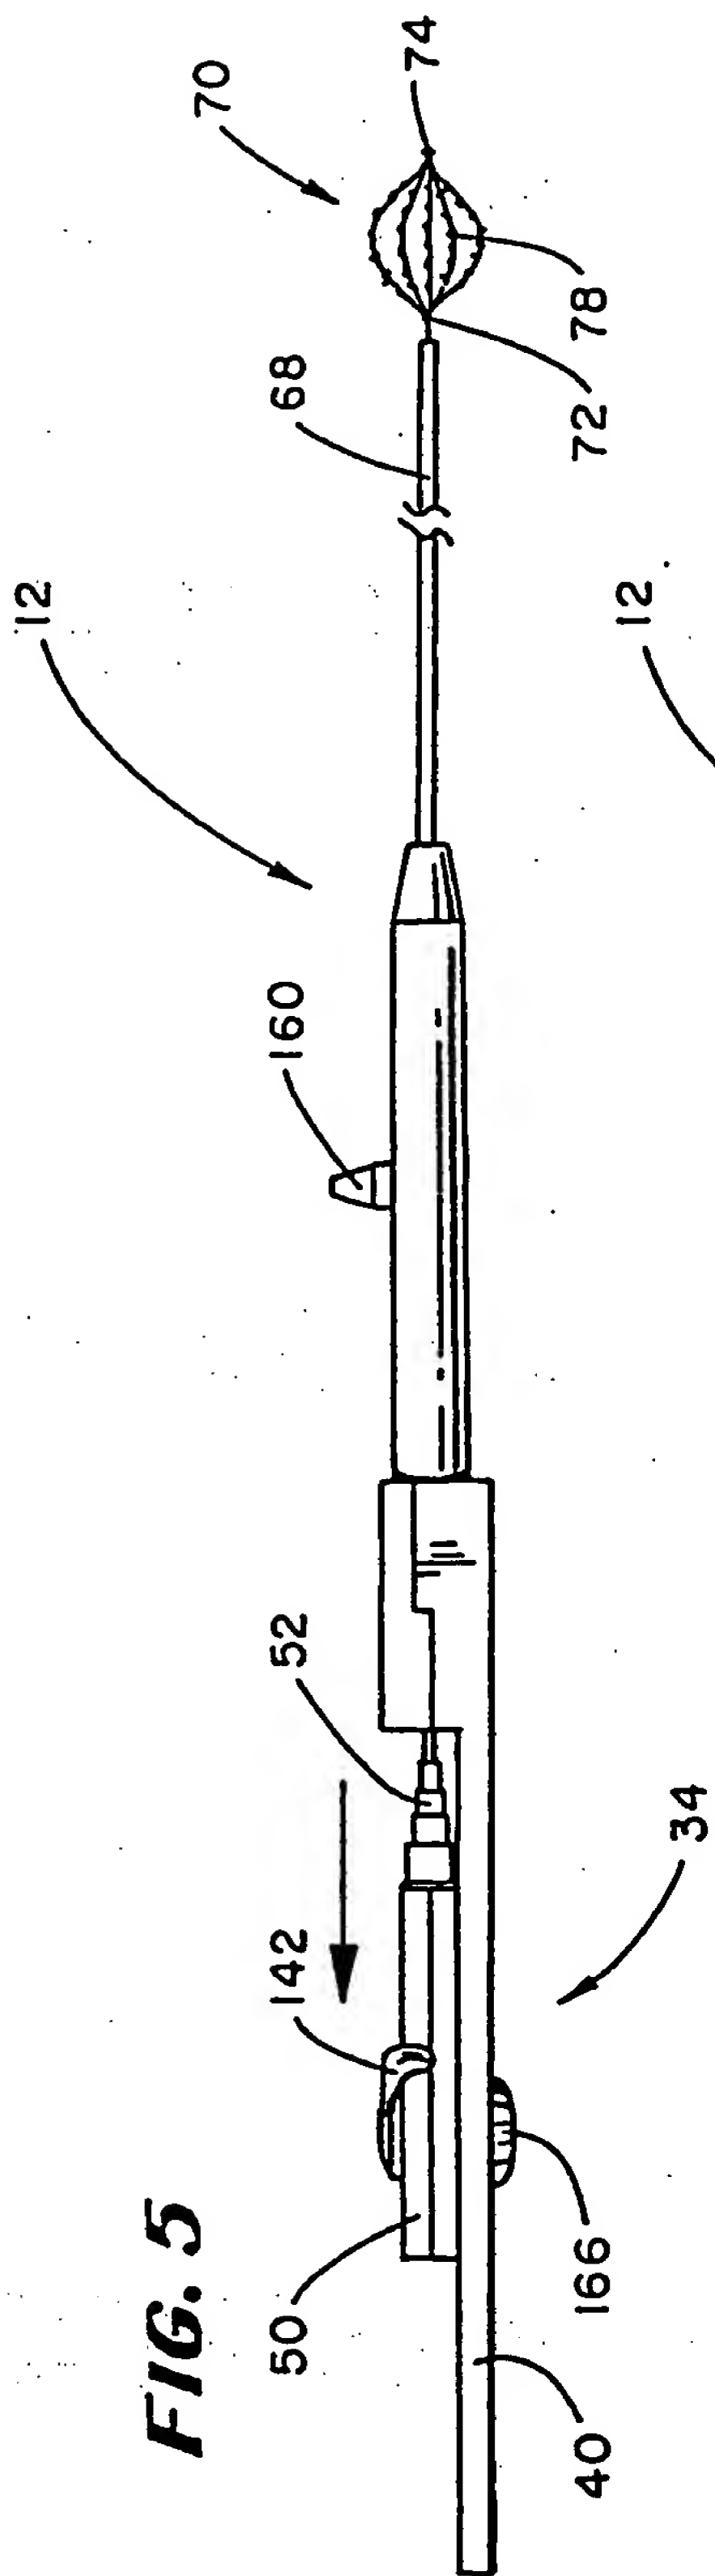


FIG. 6

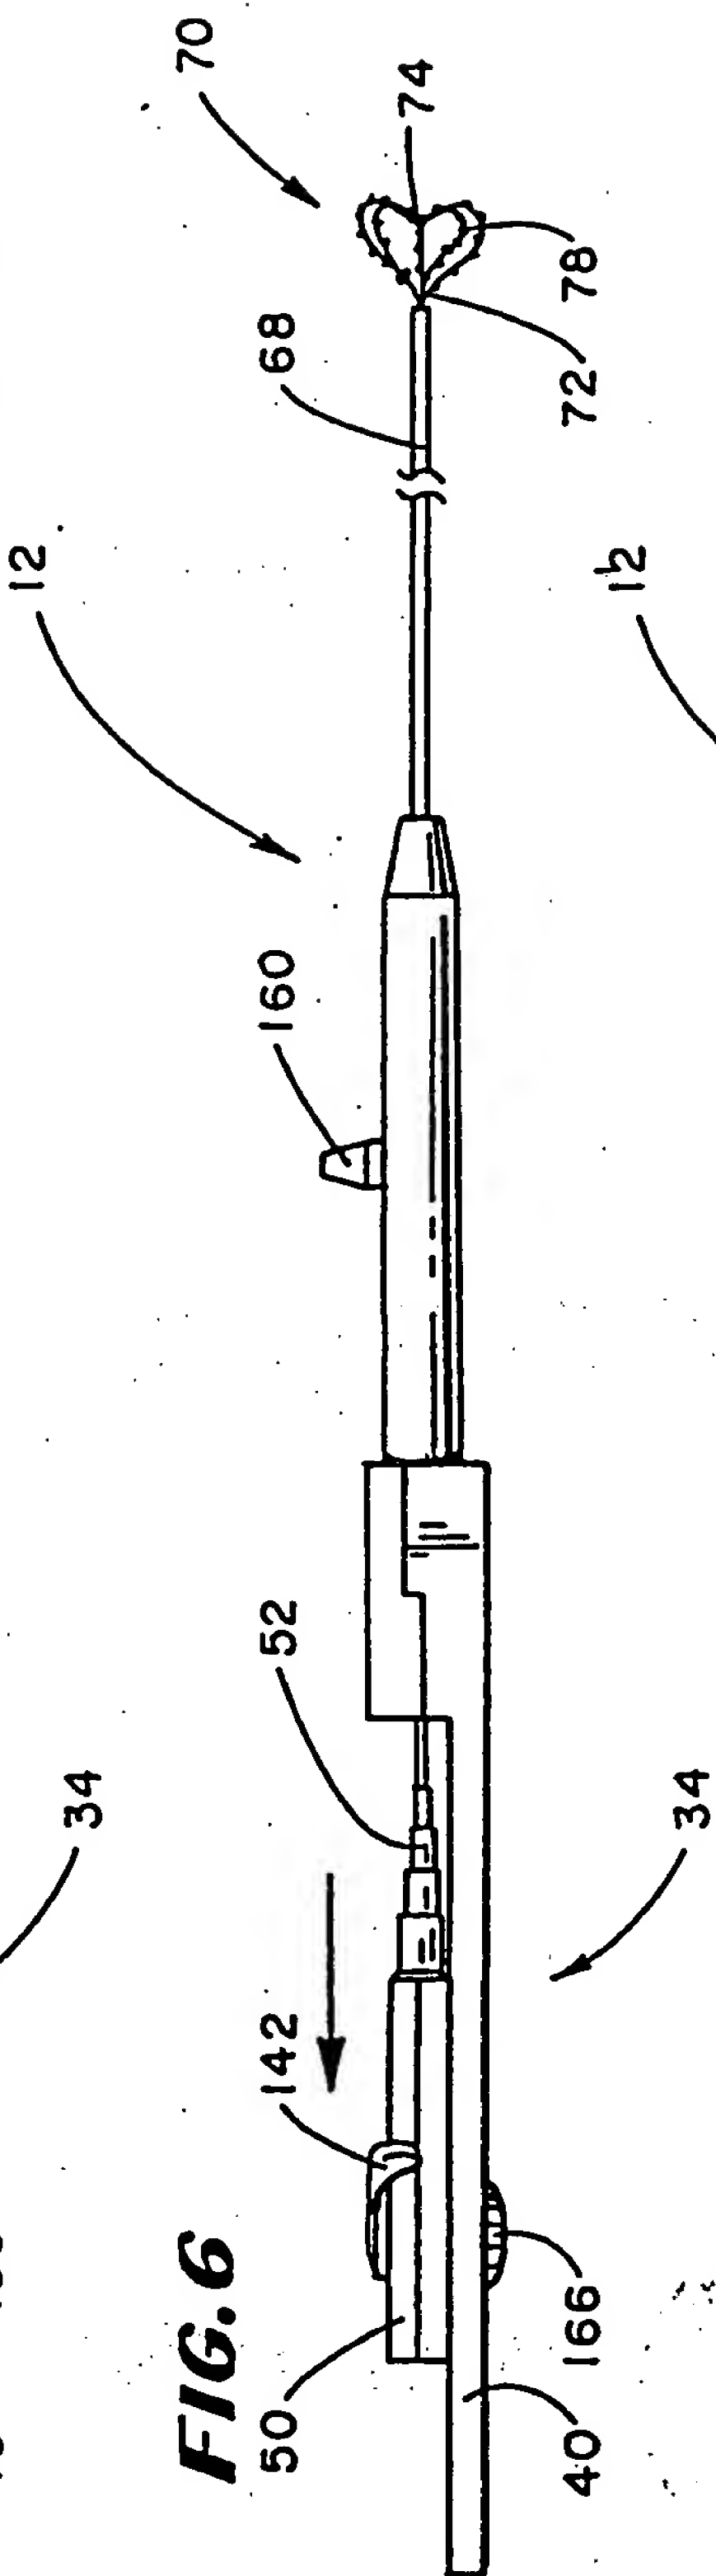


FIG. 7

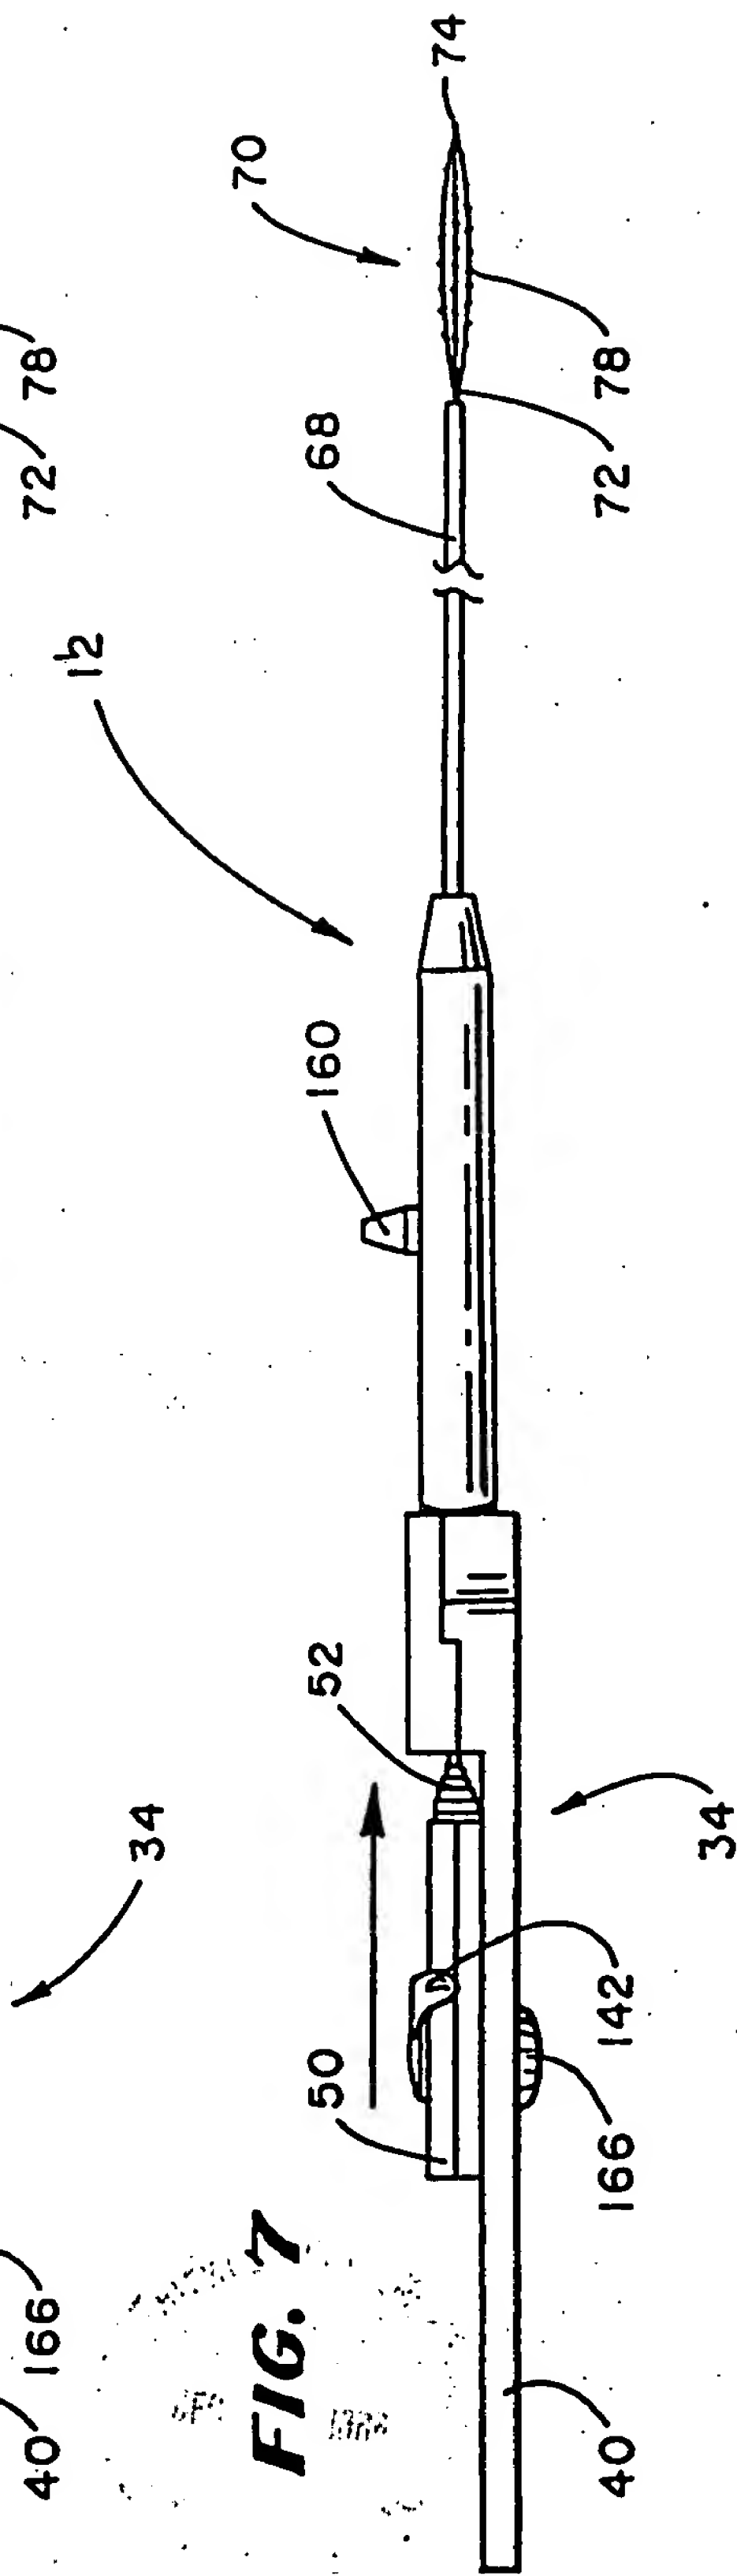


FIG. 10



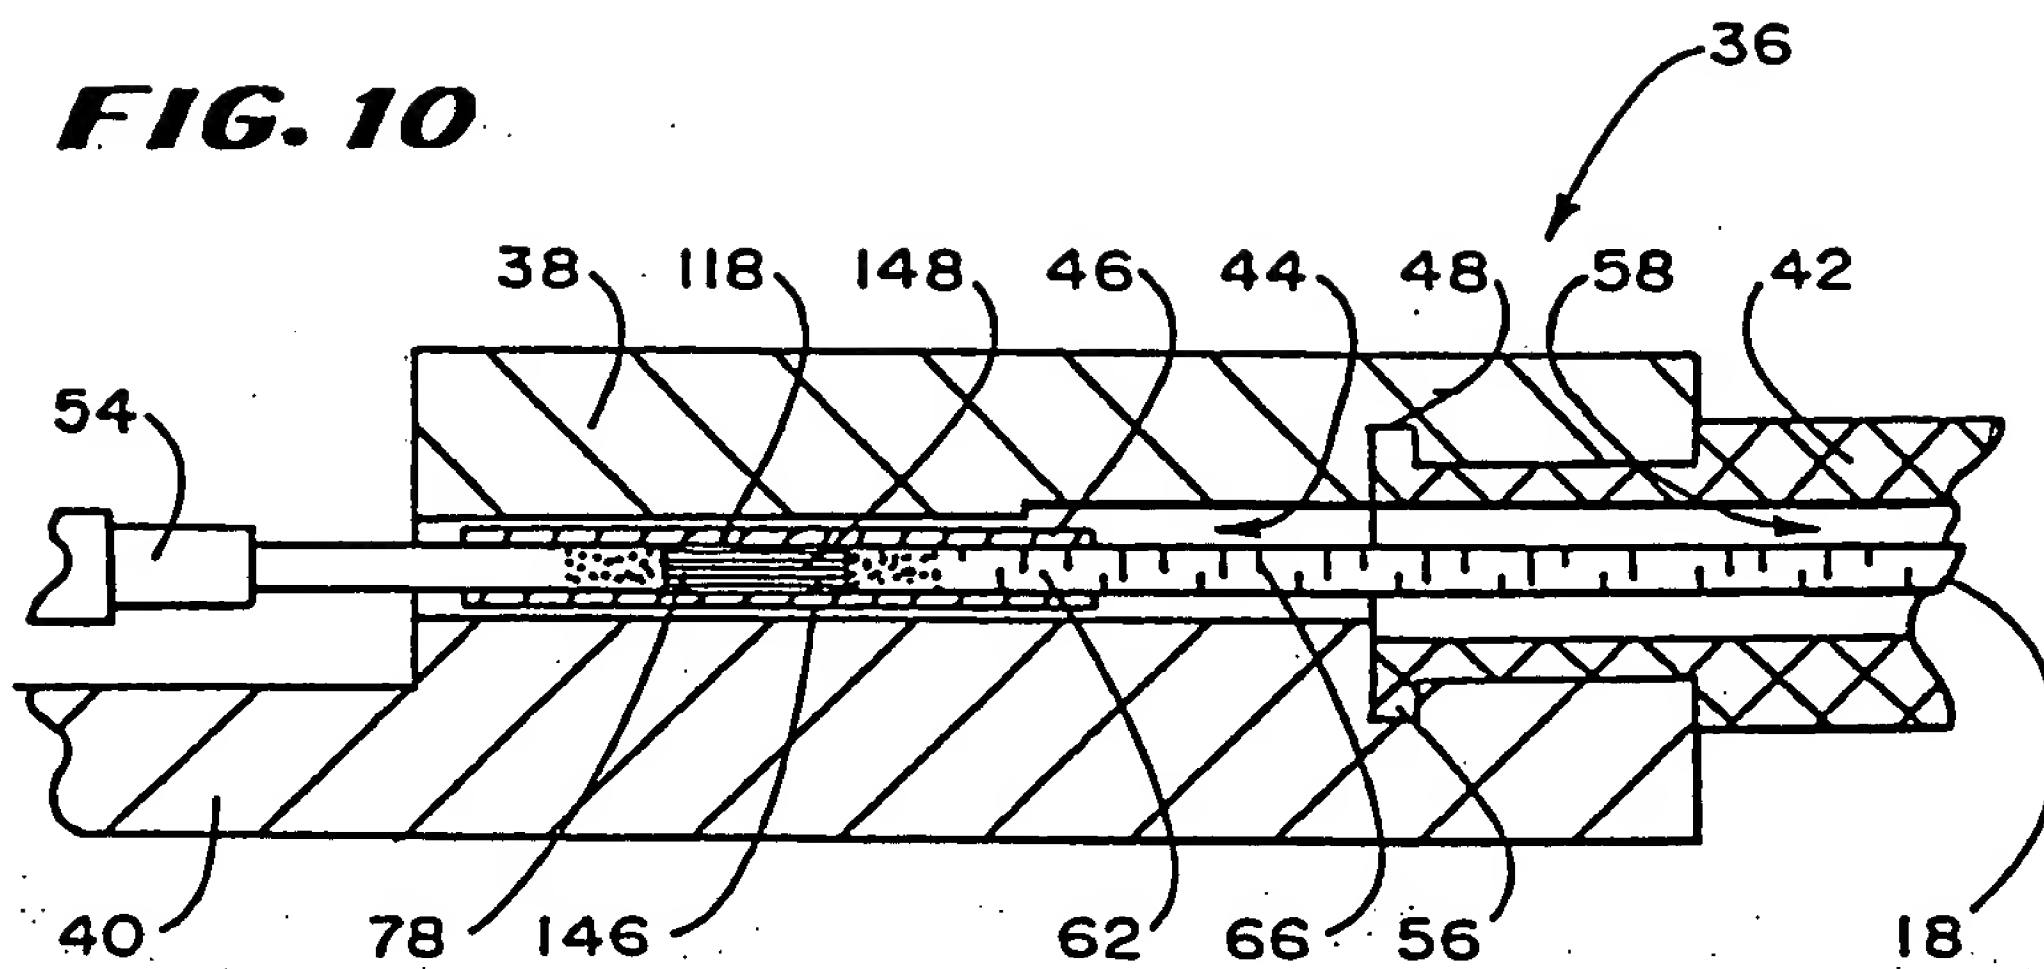


FIG. 11

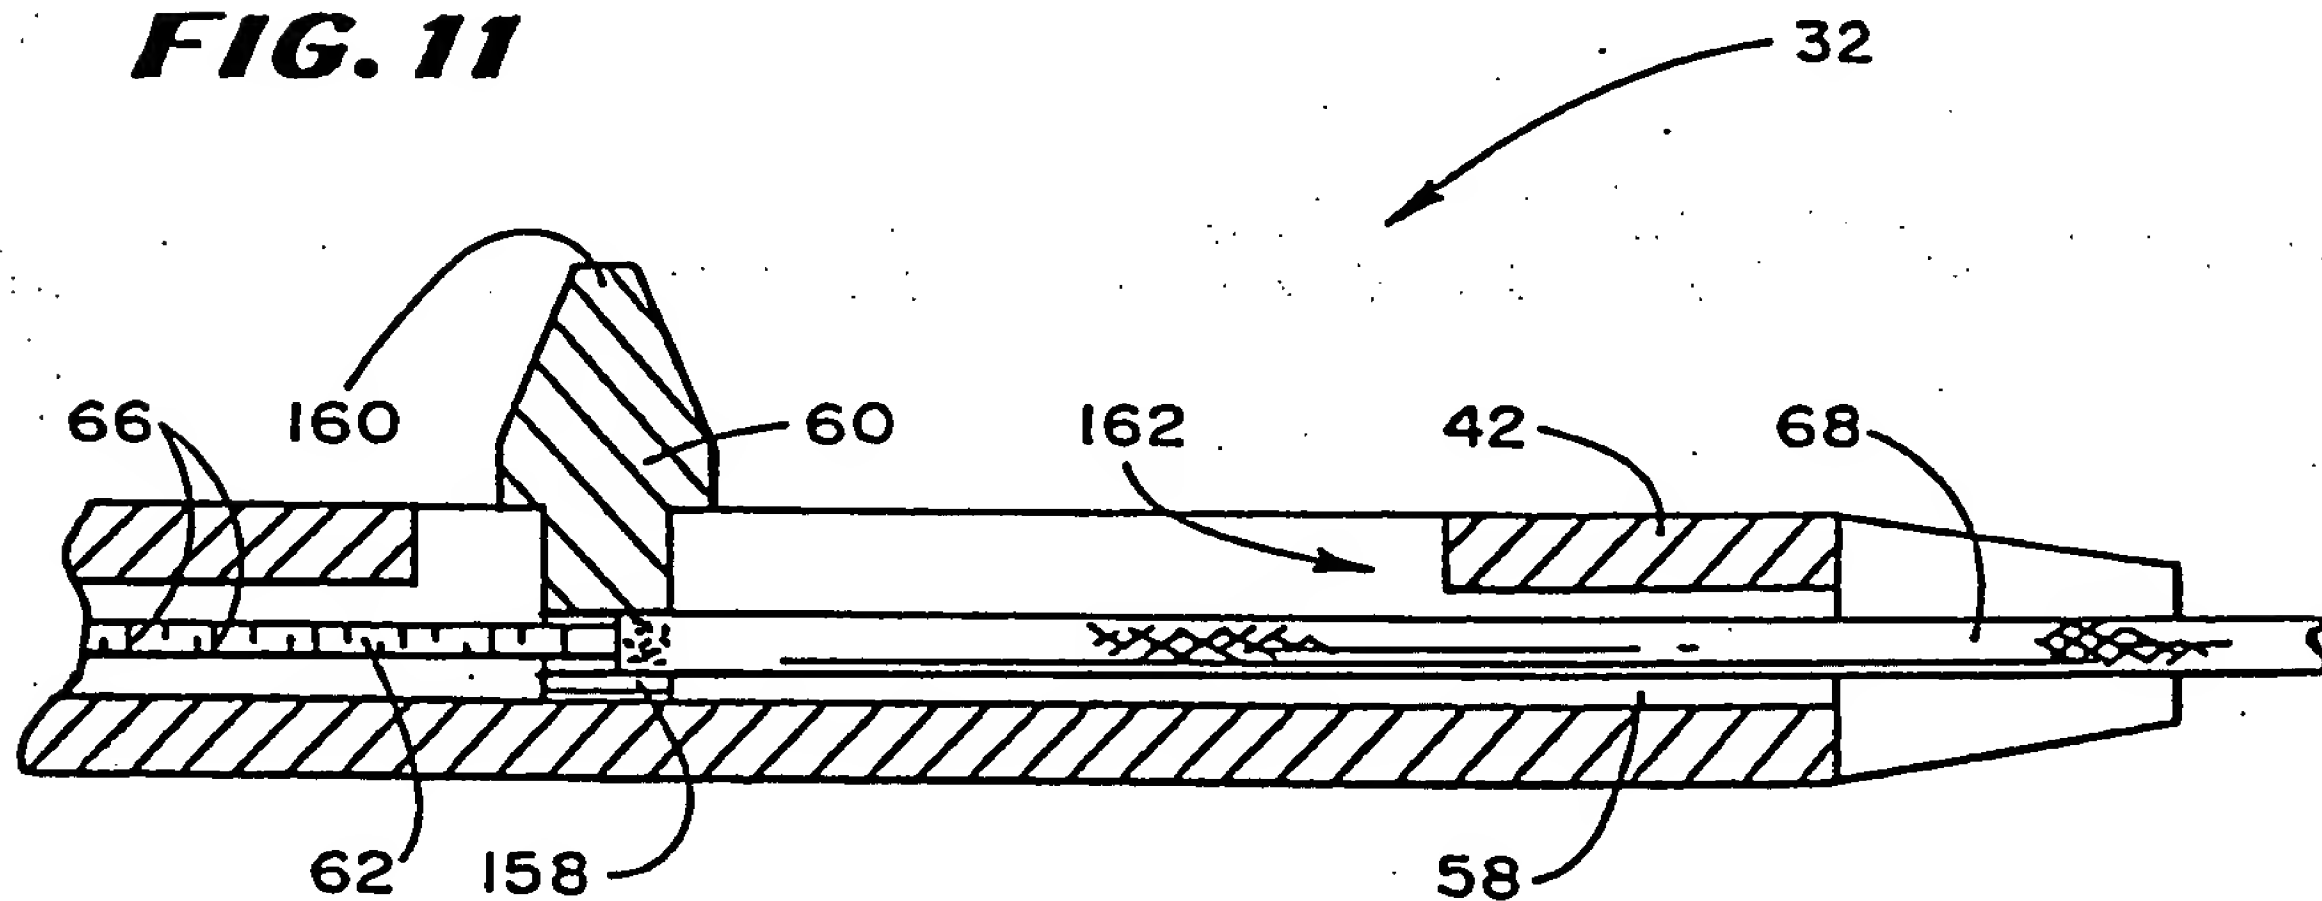

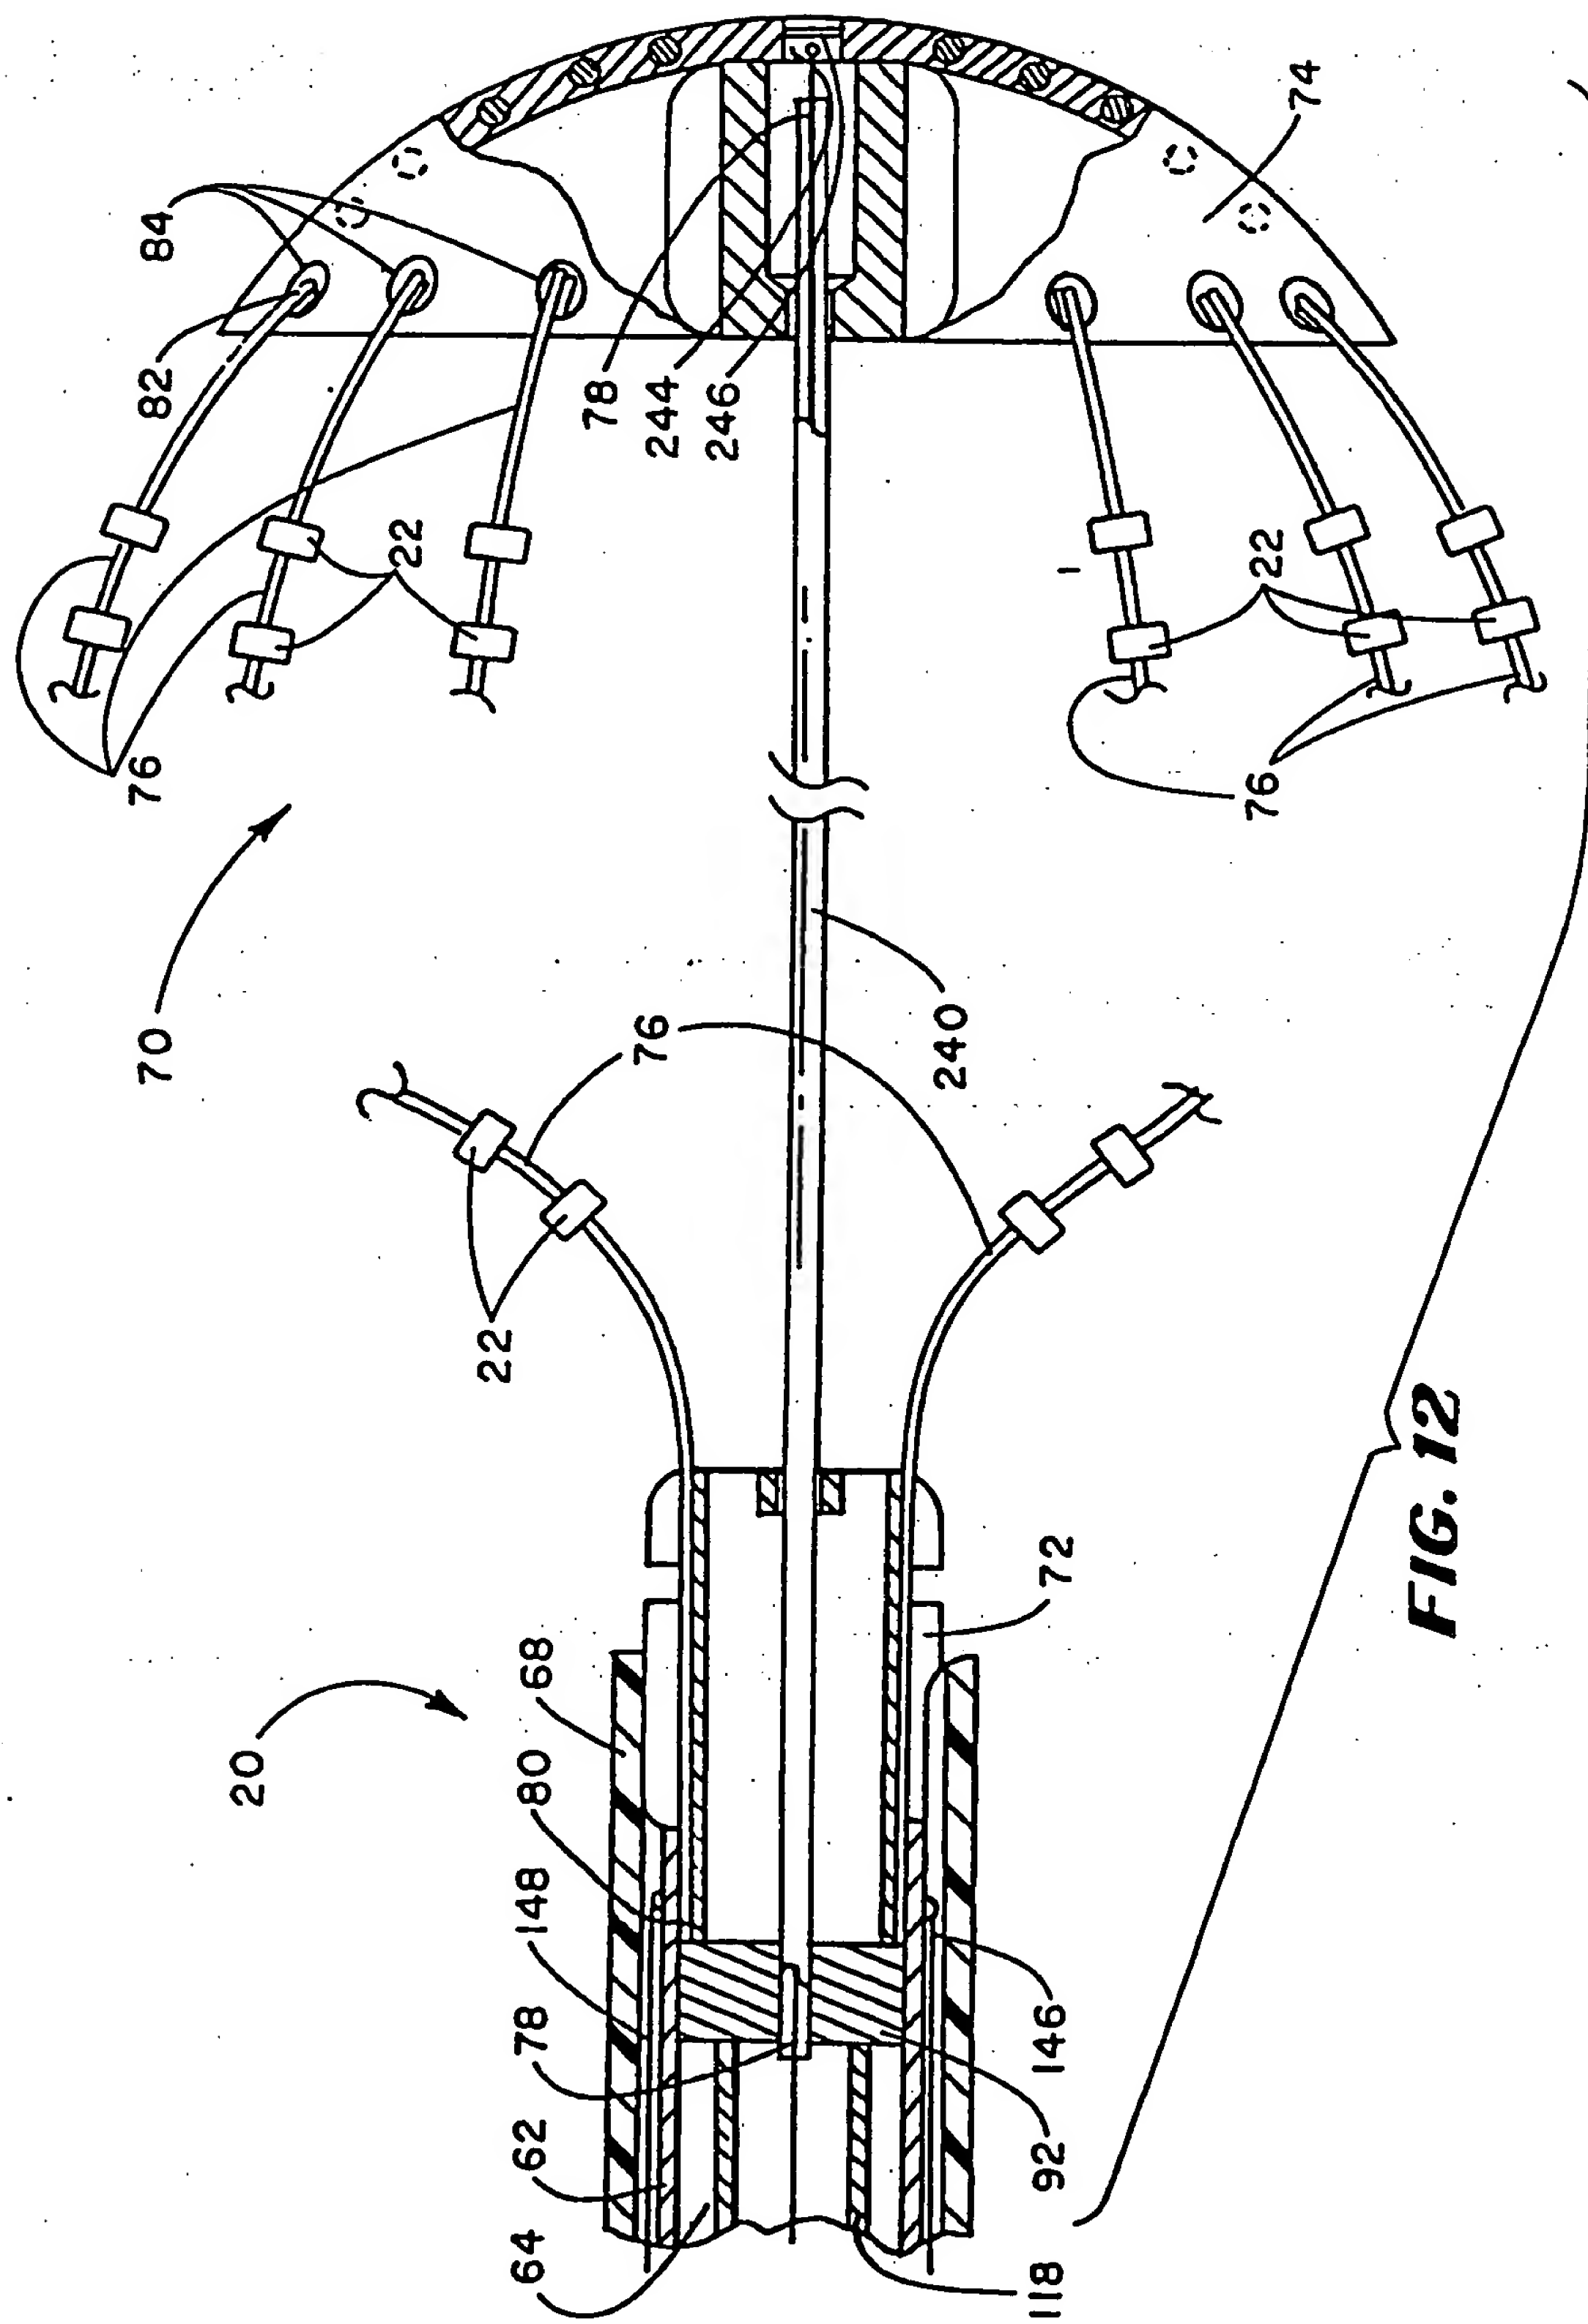

Patented
Mar. 11, 1964
U.S. Pat. 3,111,444

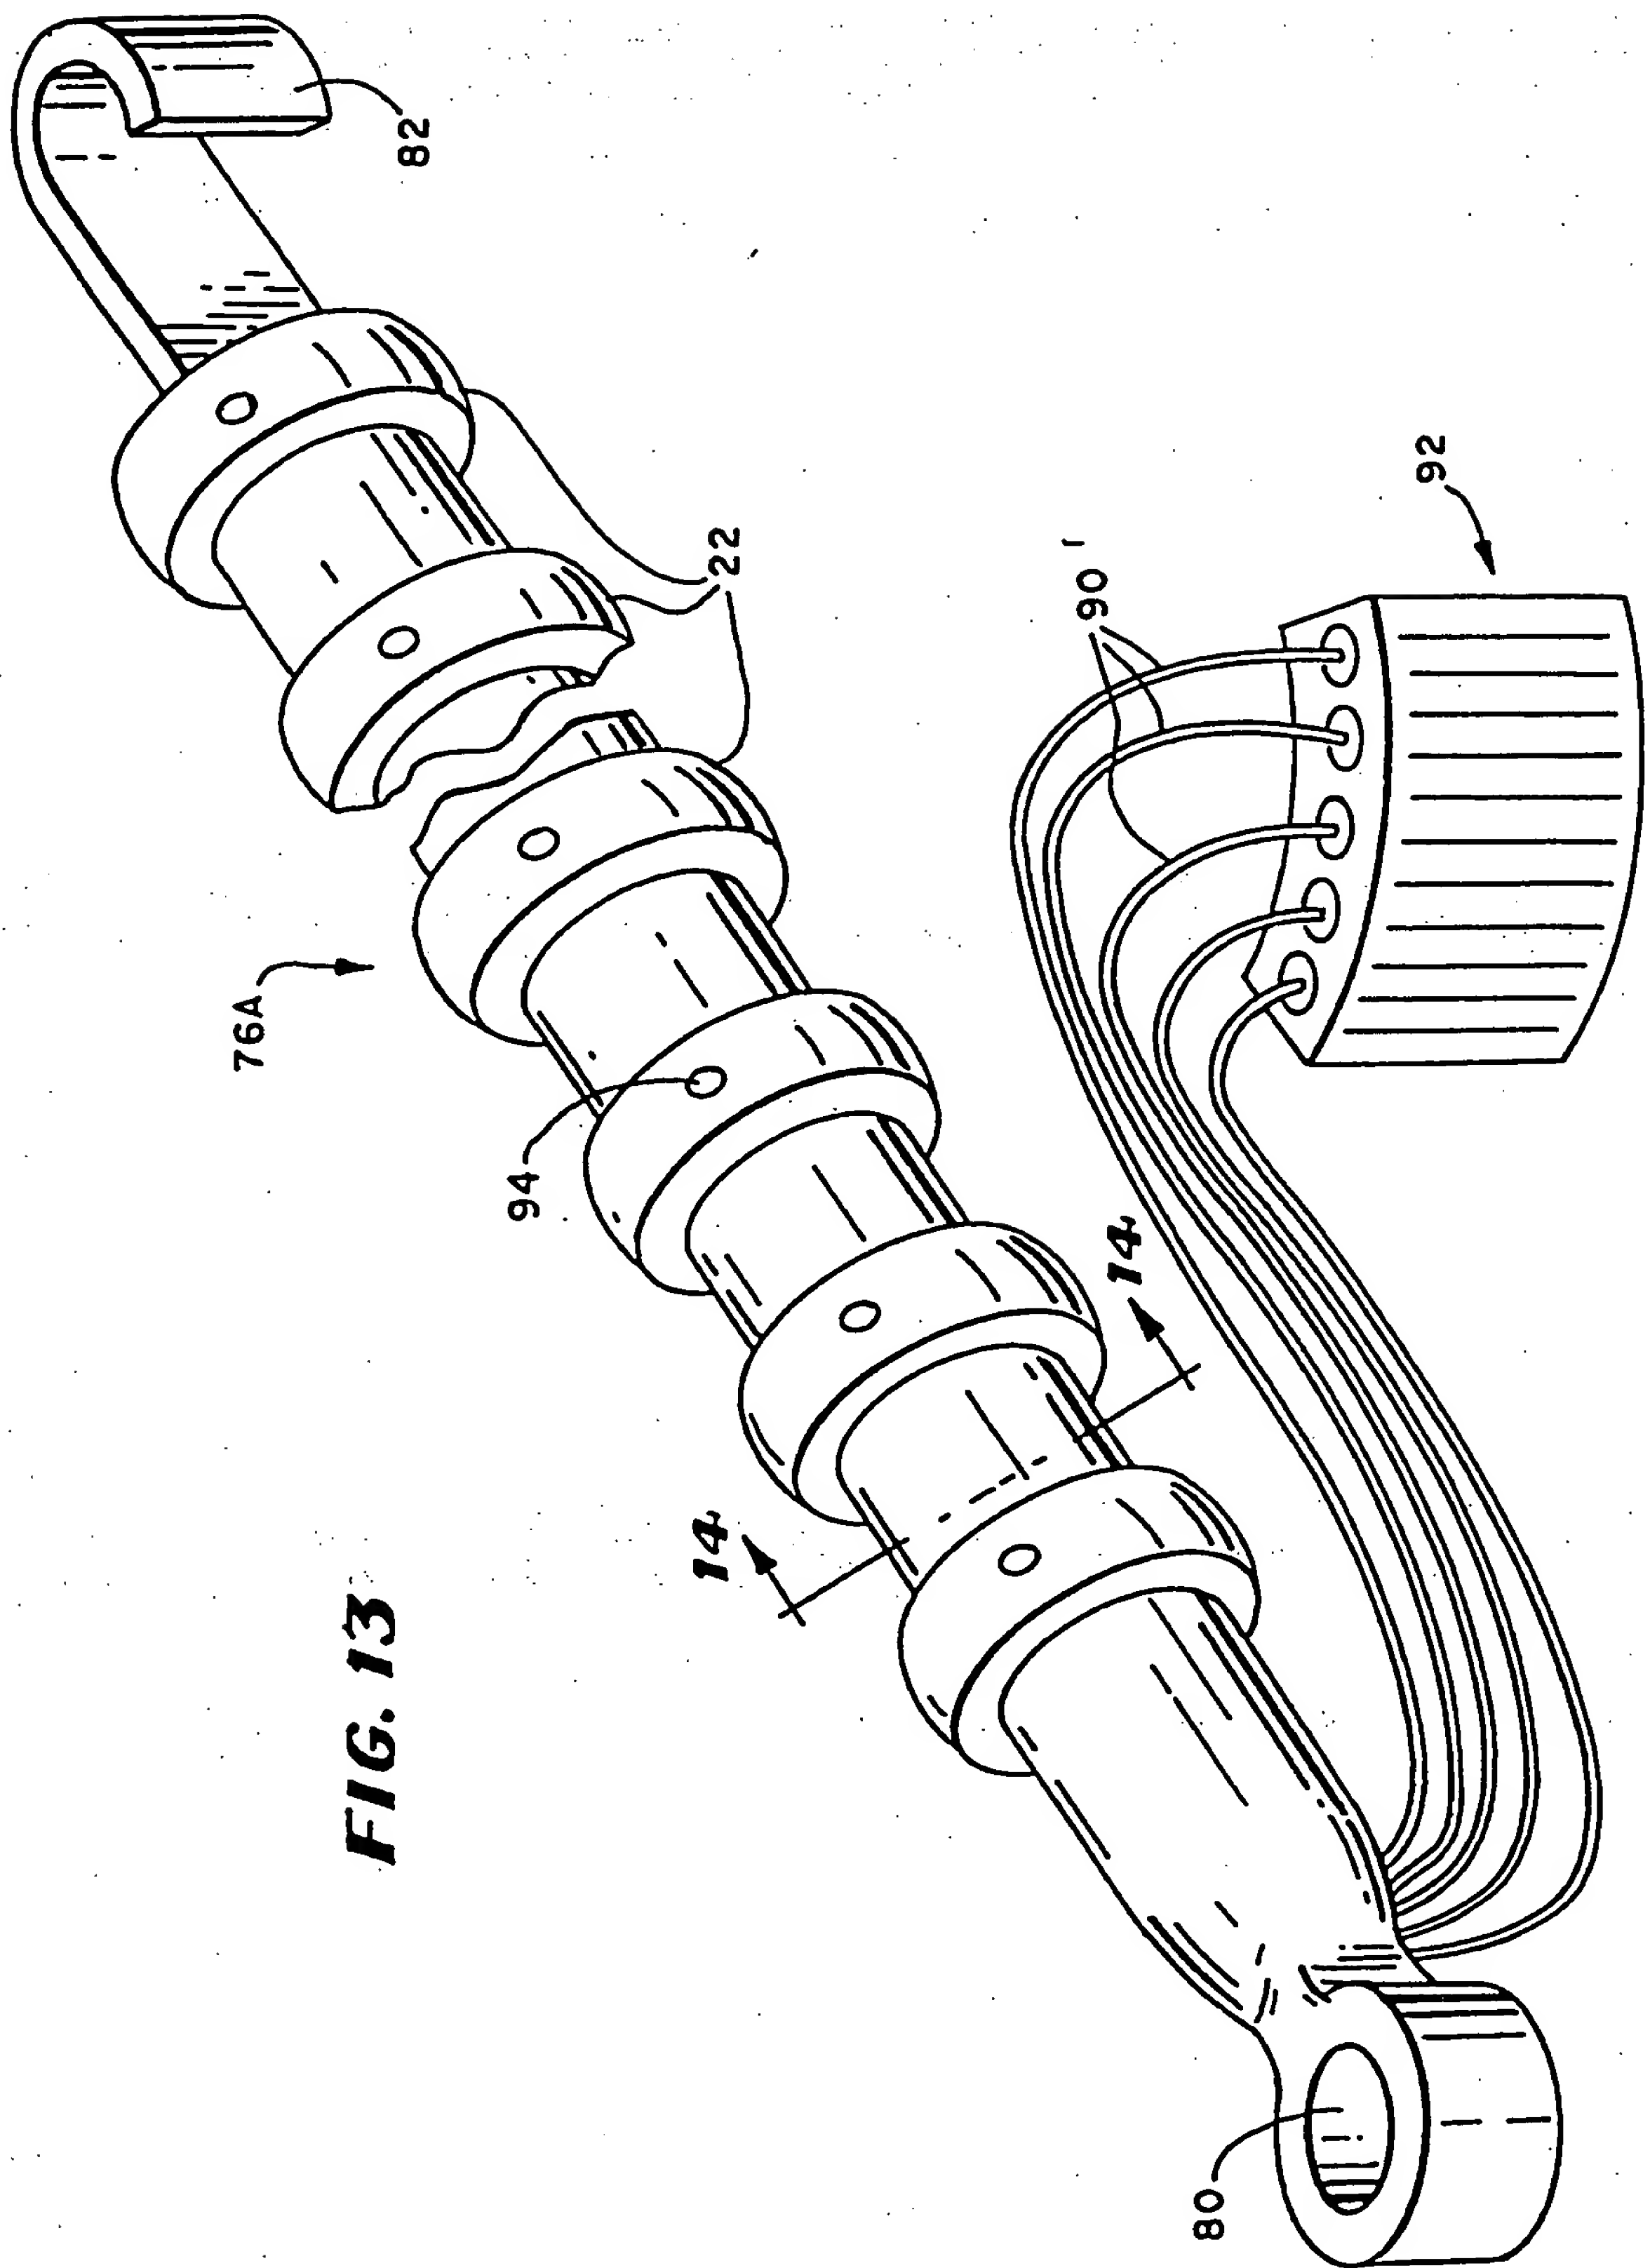
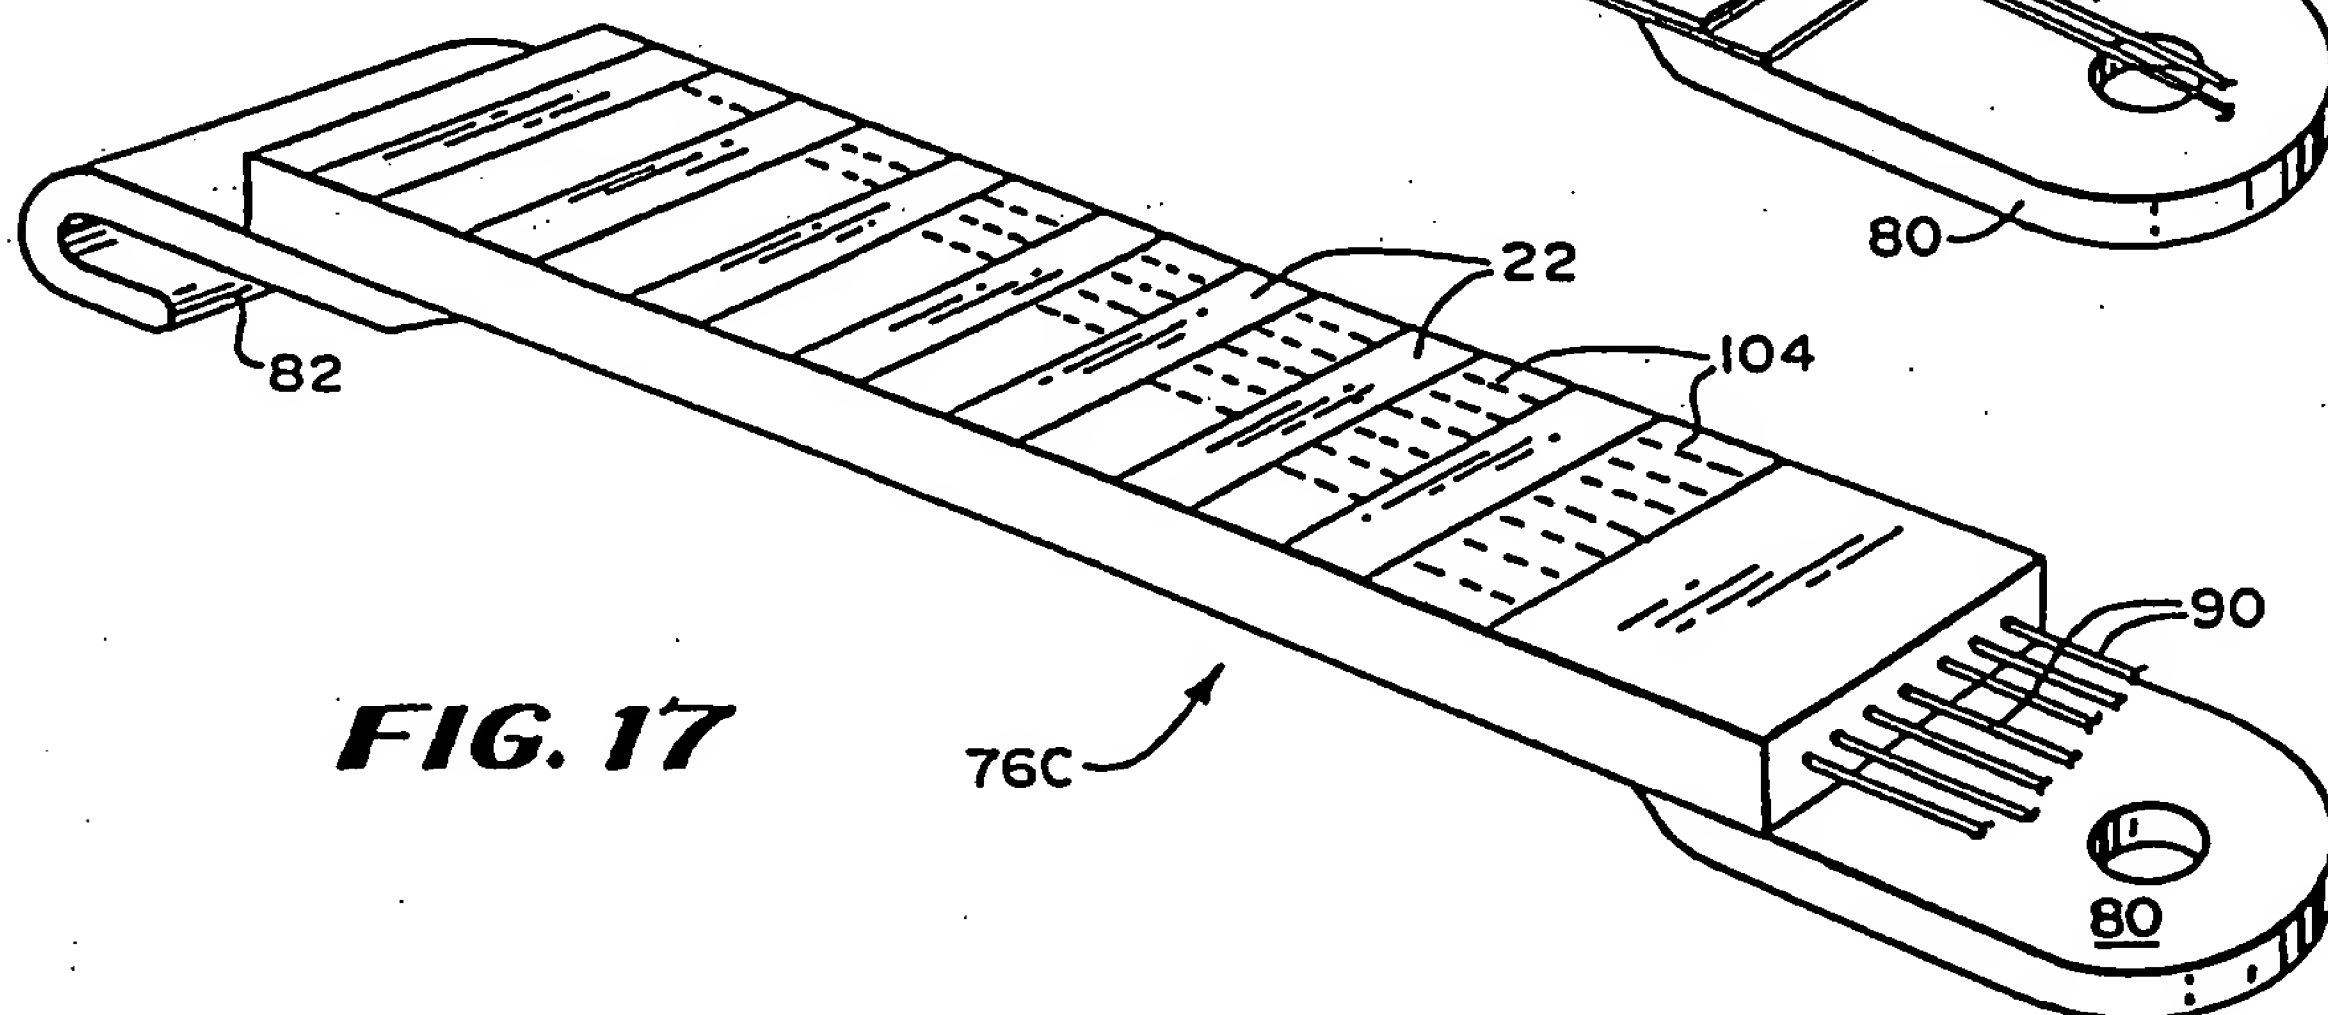
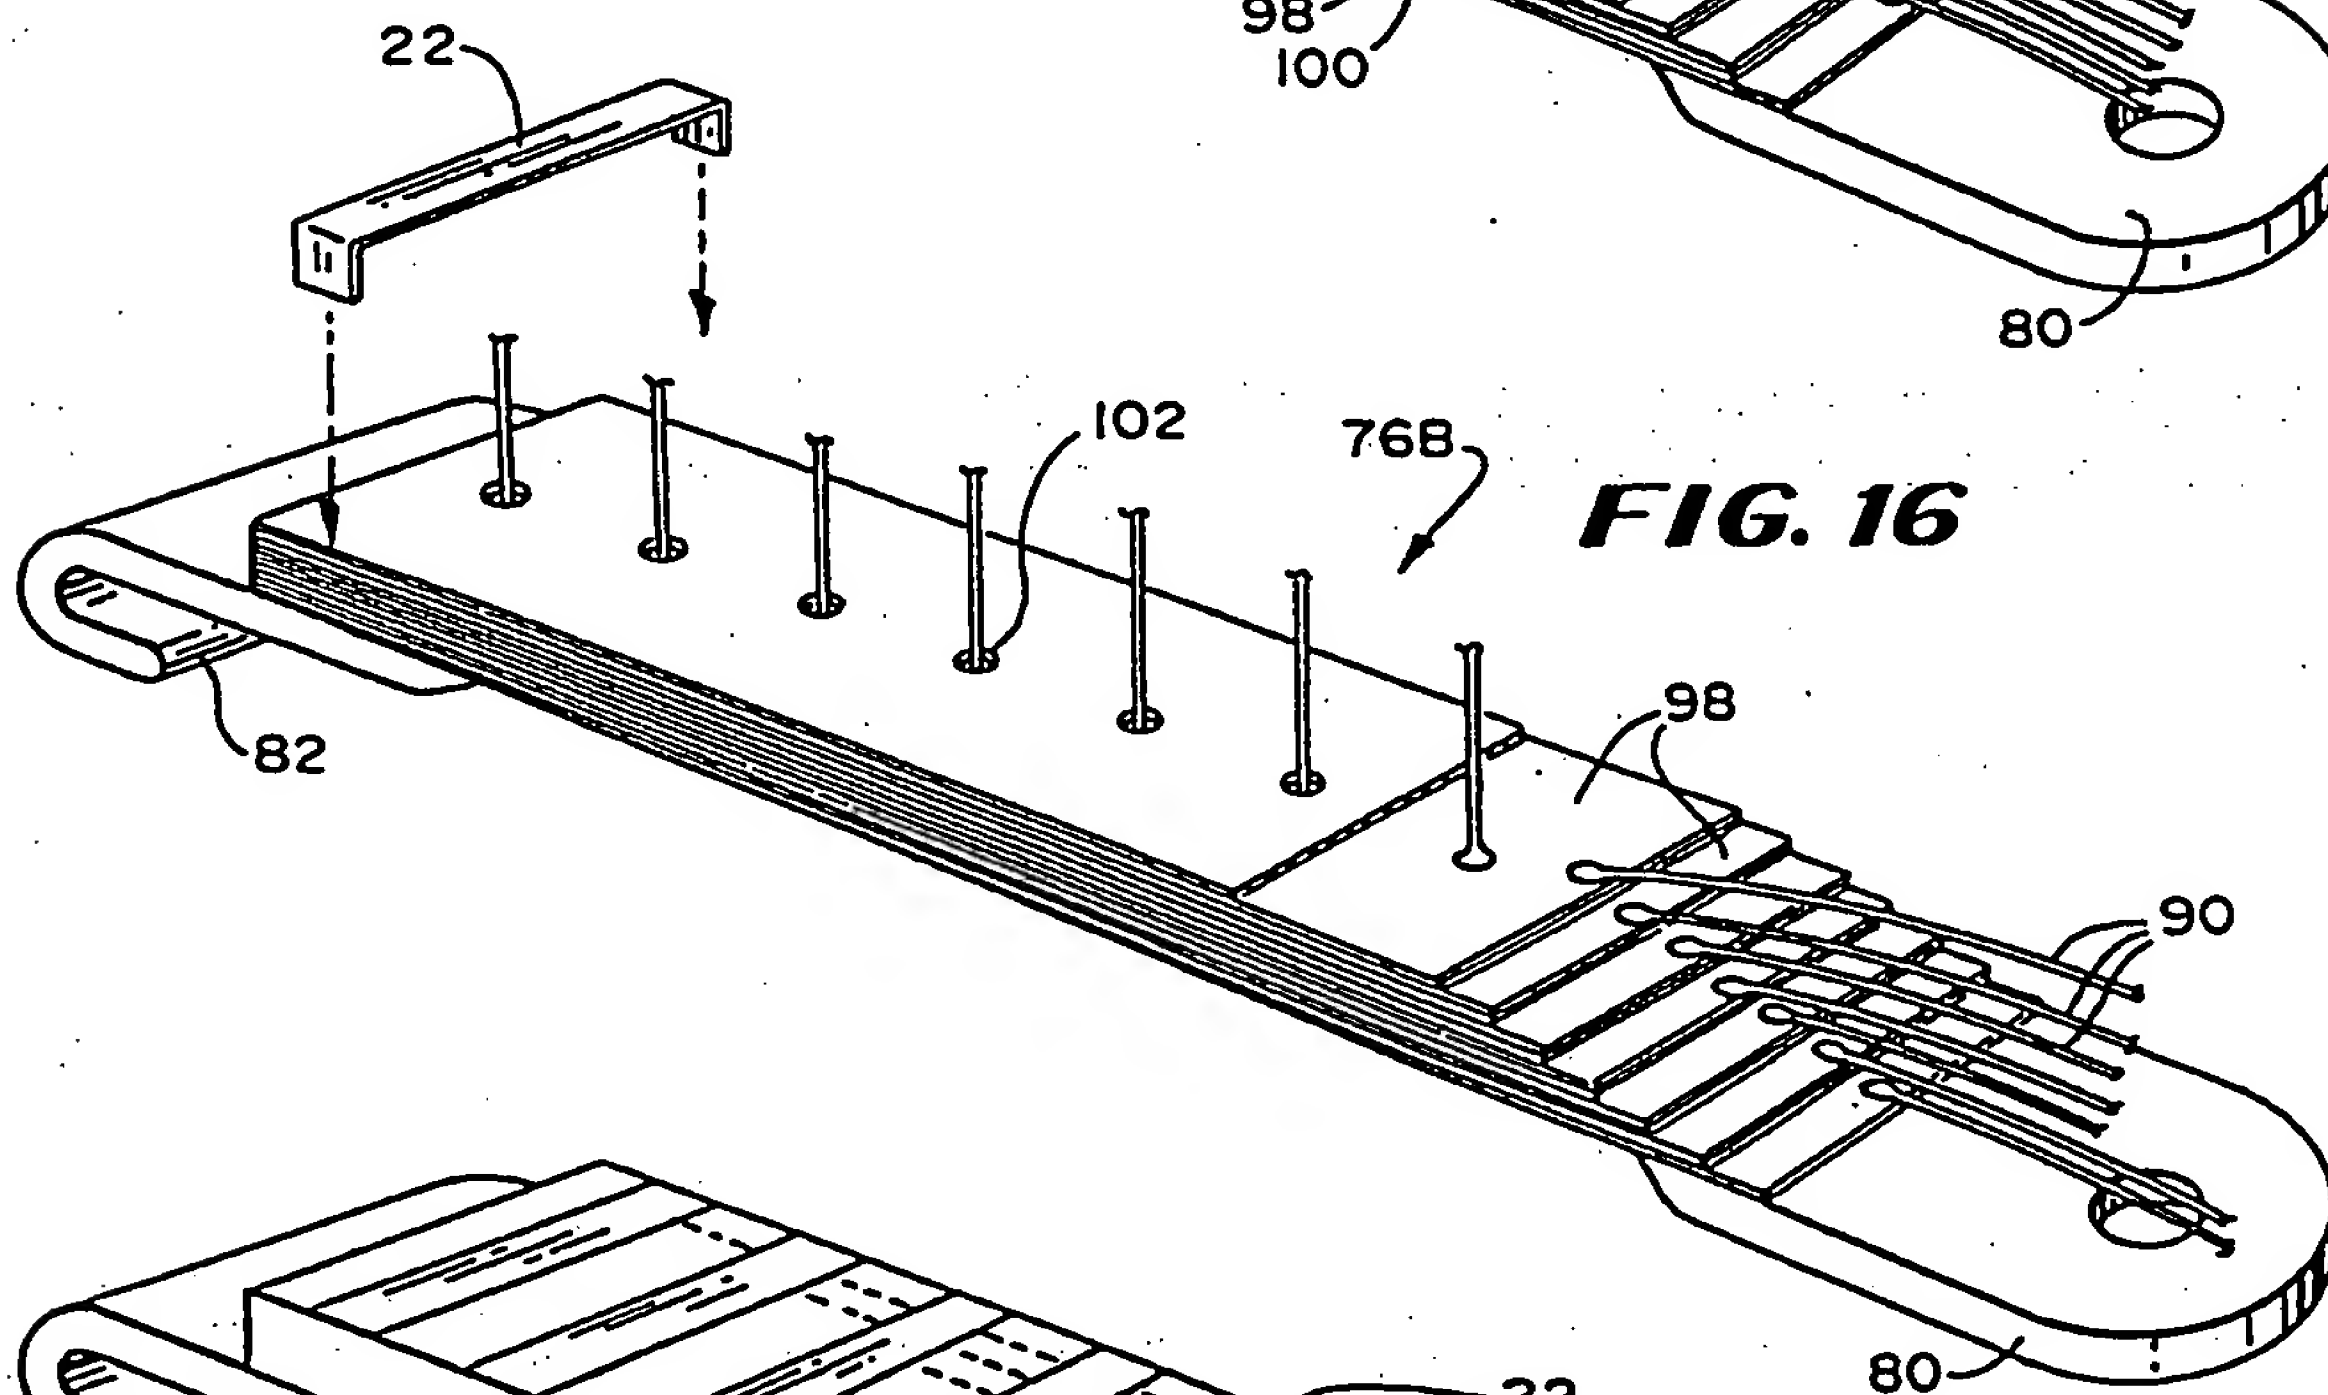
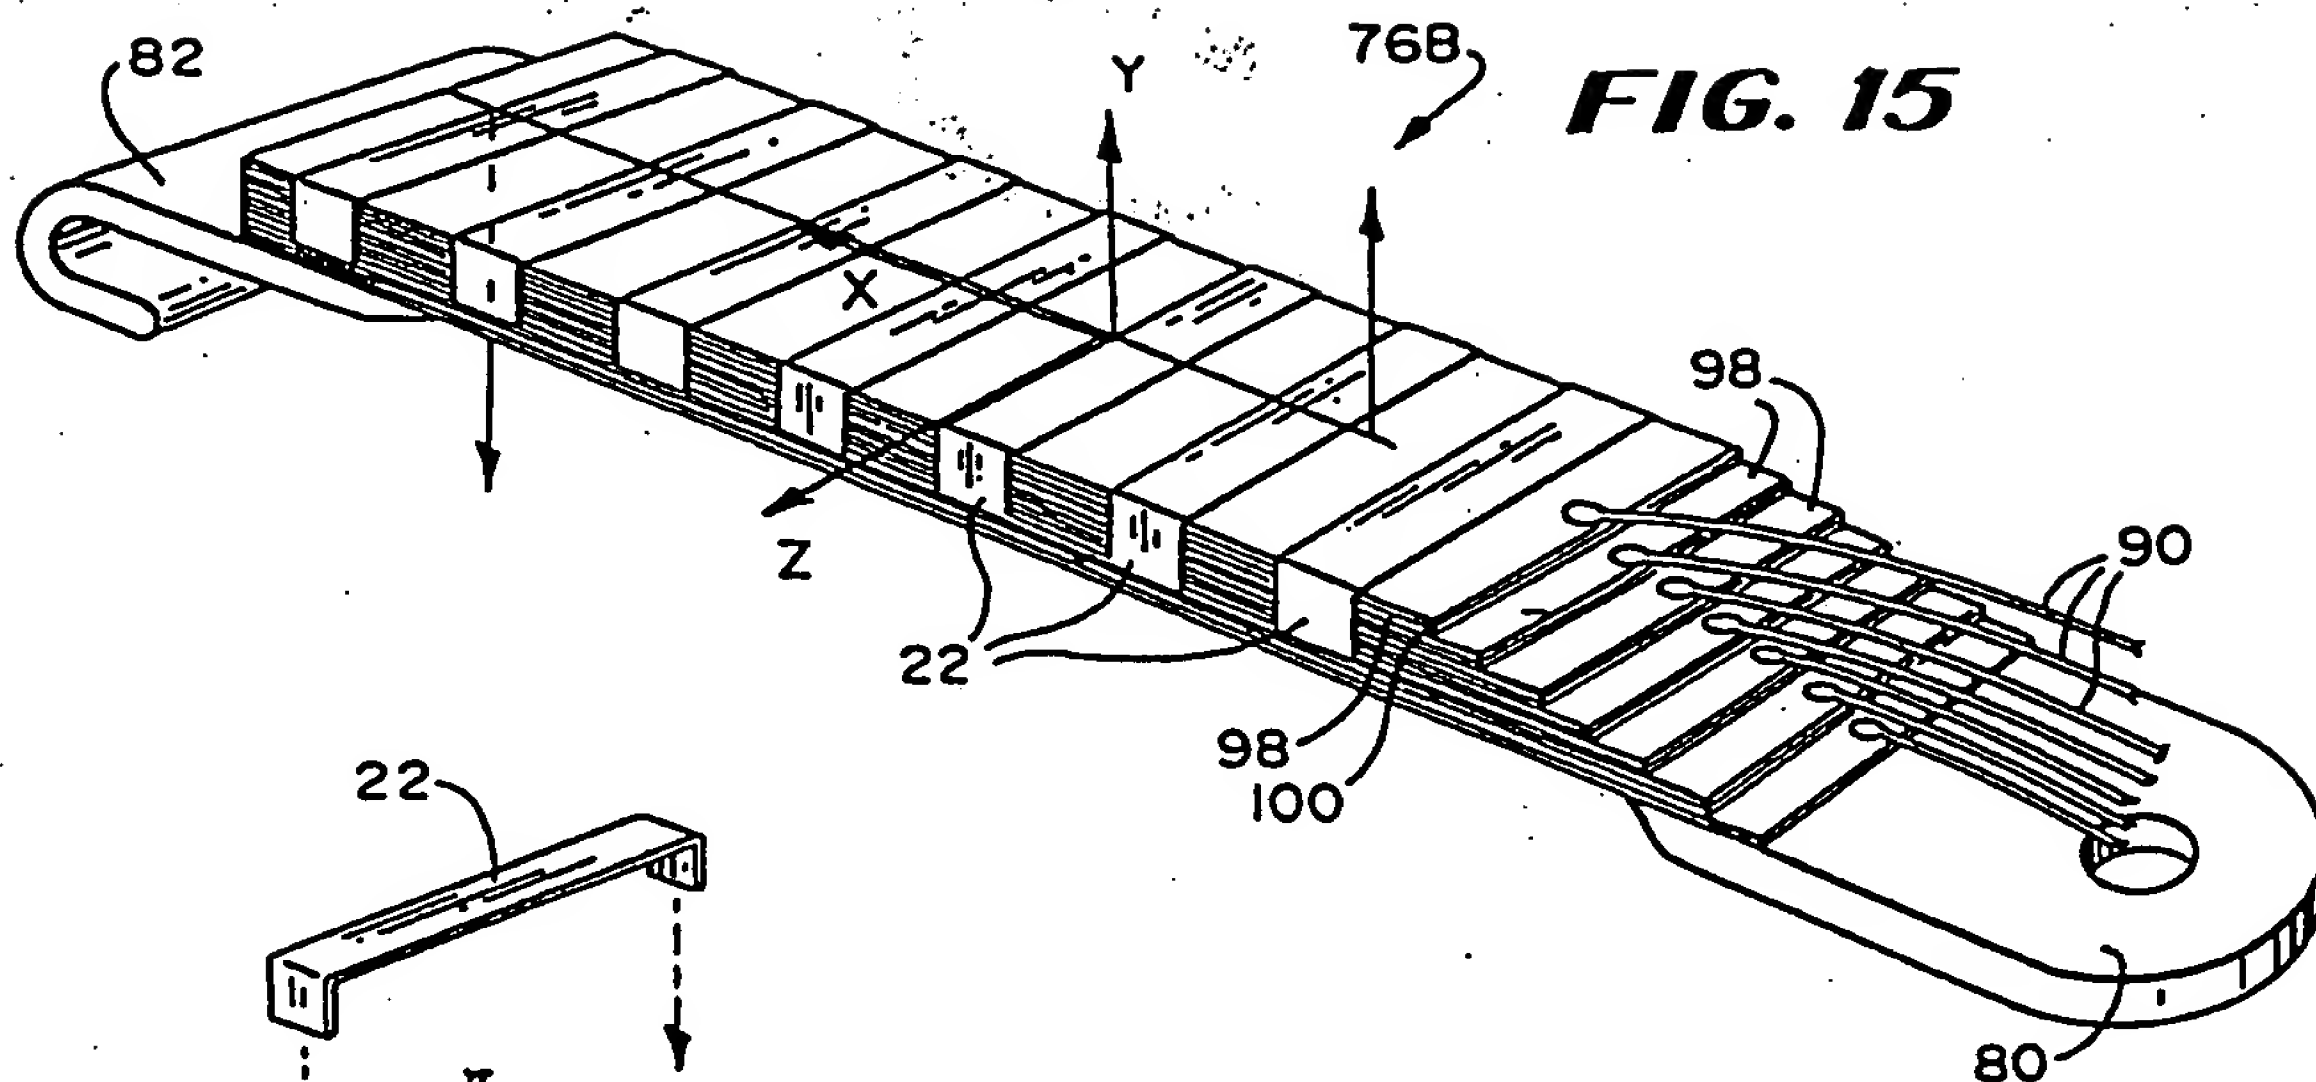


FIG. 13

FIG. 14 is a perspective view of a circular device. The device features a central hub (22) and multiple radial spokes (86, 88) extending from the hub to the outer rim (94). A curved arrow (76A) indicates a rotational direction. The spokes are shown in a perspective view, with some spokes (86) having a wider base and others (88) having a narrower base. The outer rim (94) is a circular band that encloses the spokes.

76A



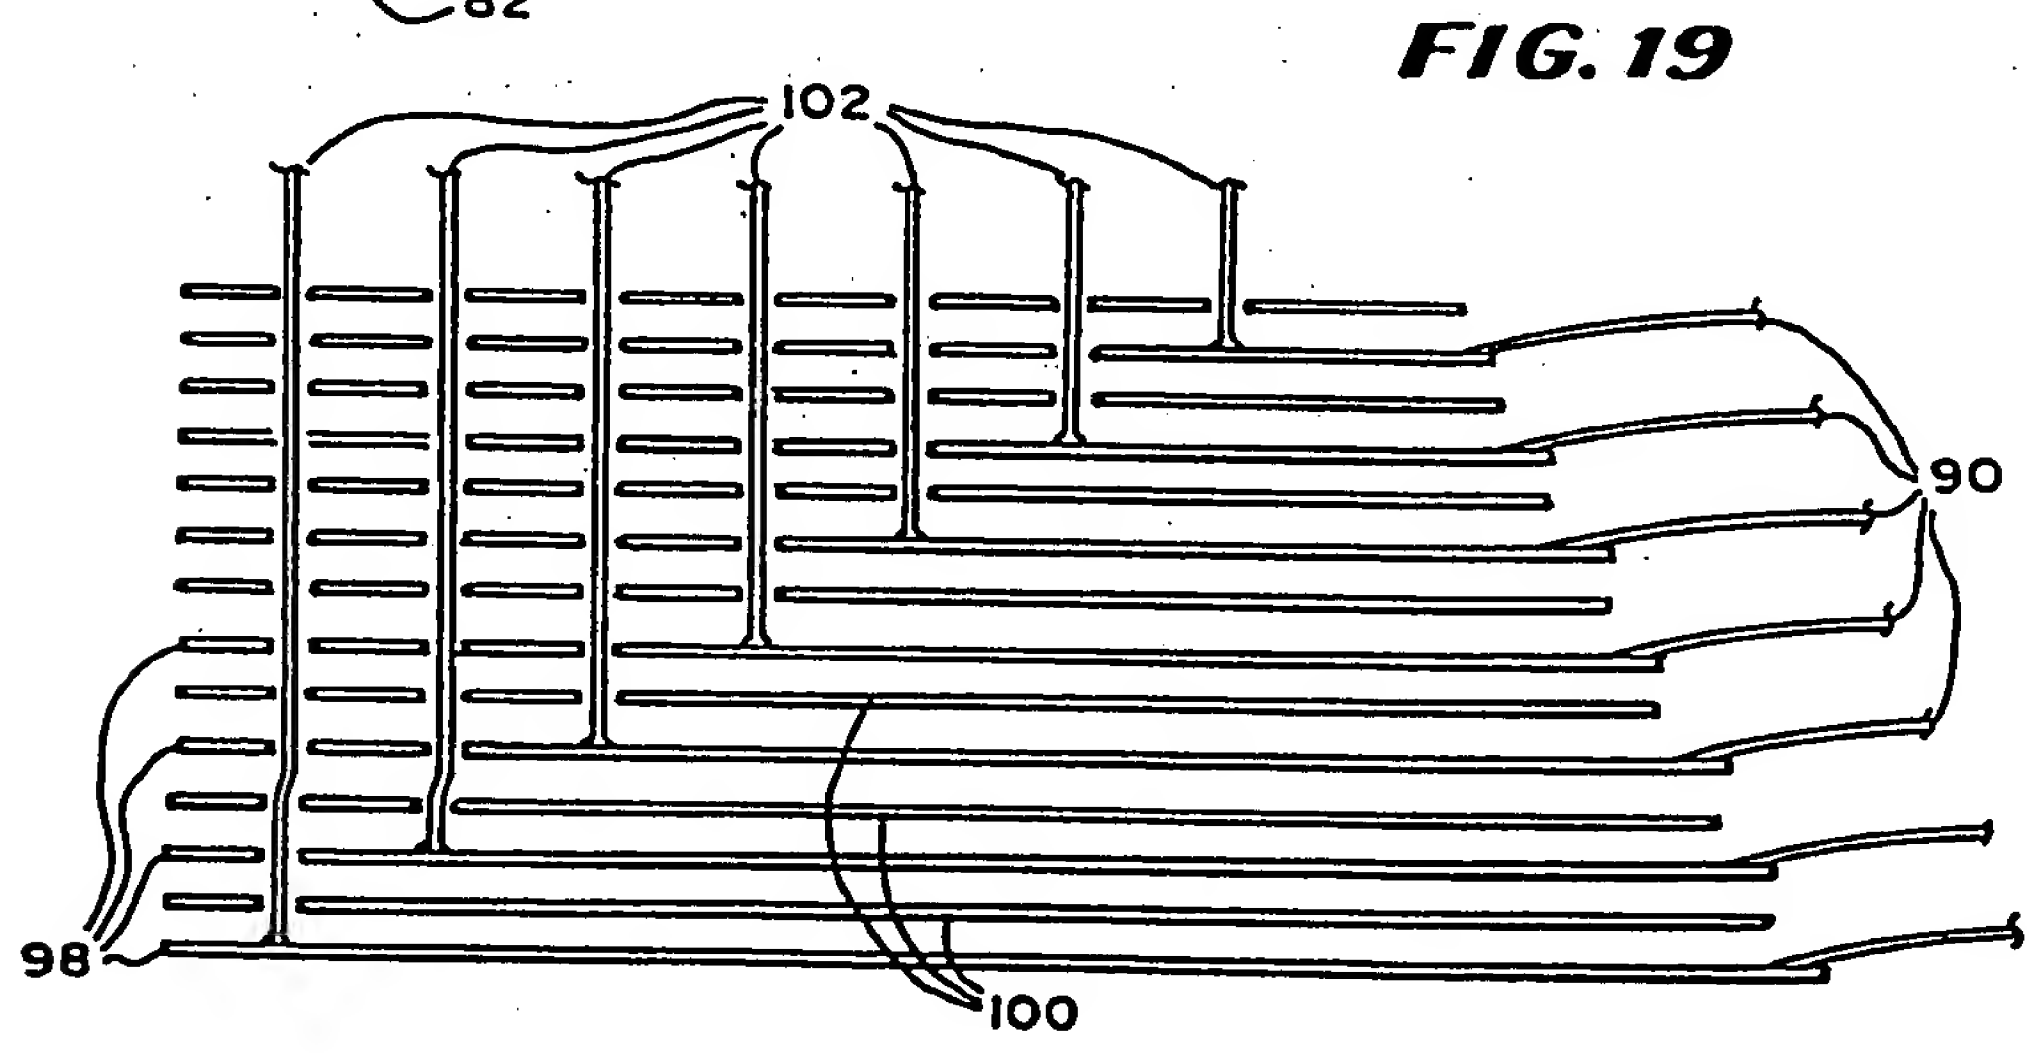
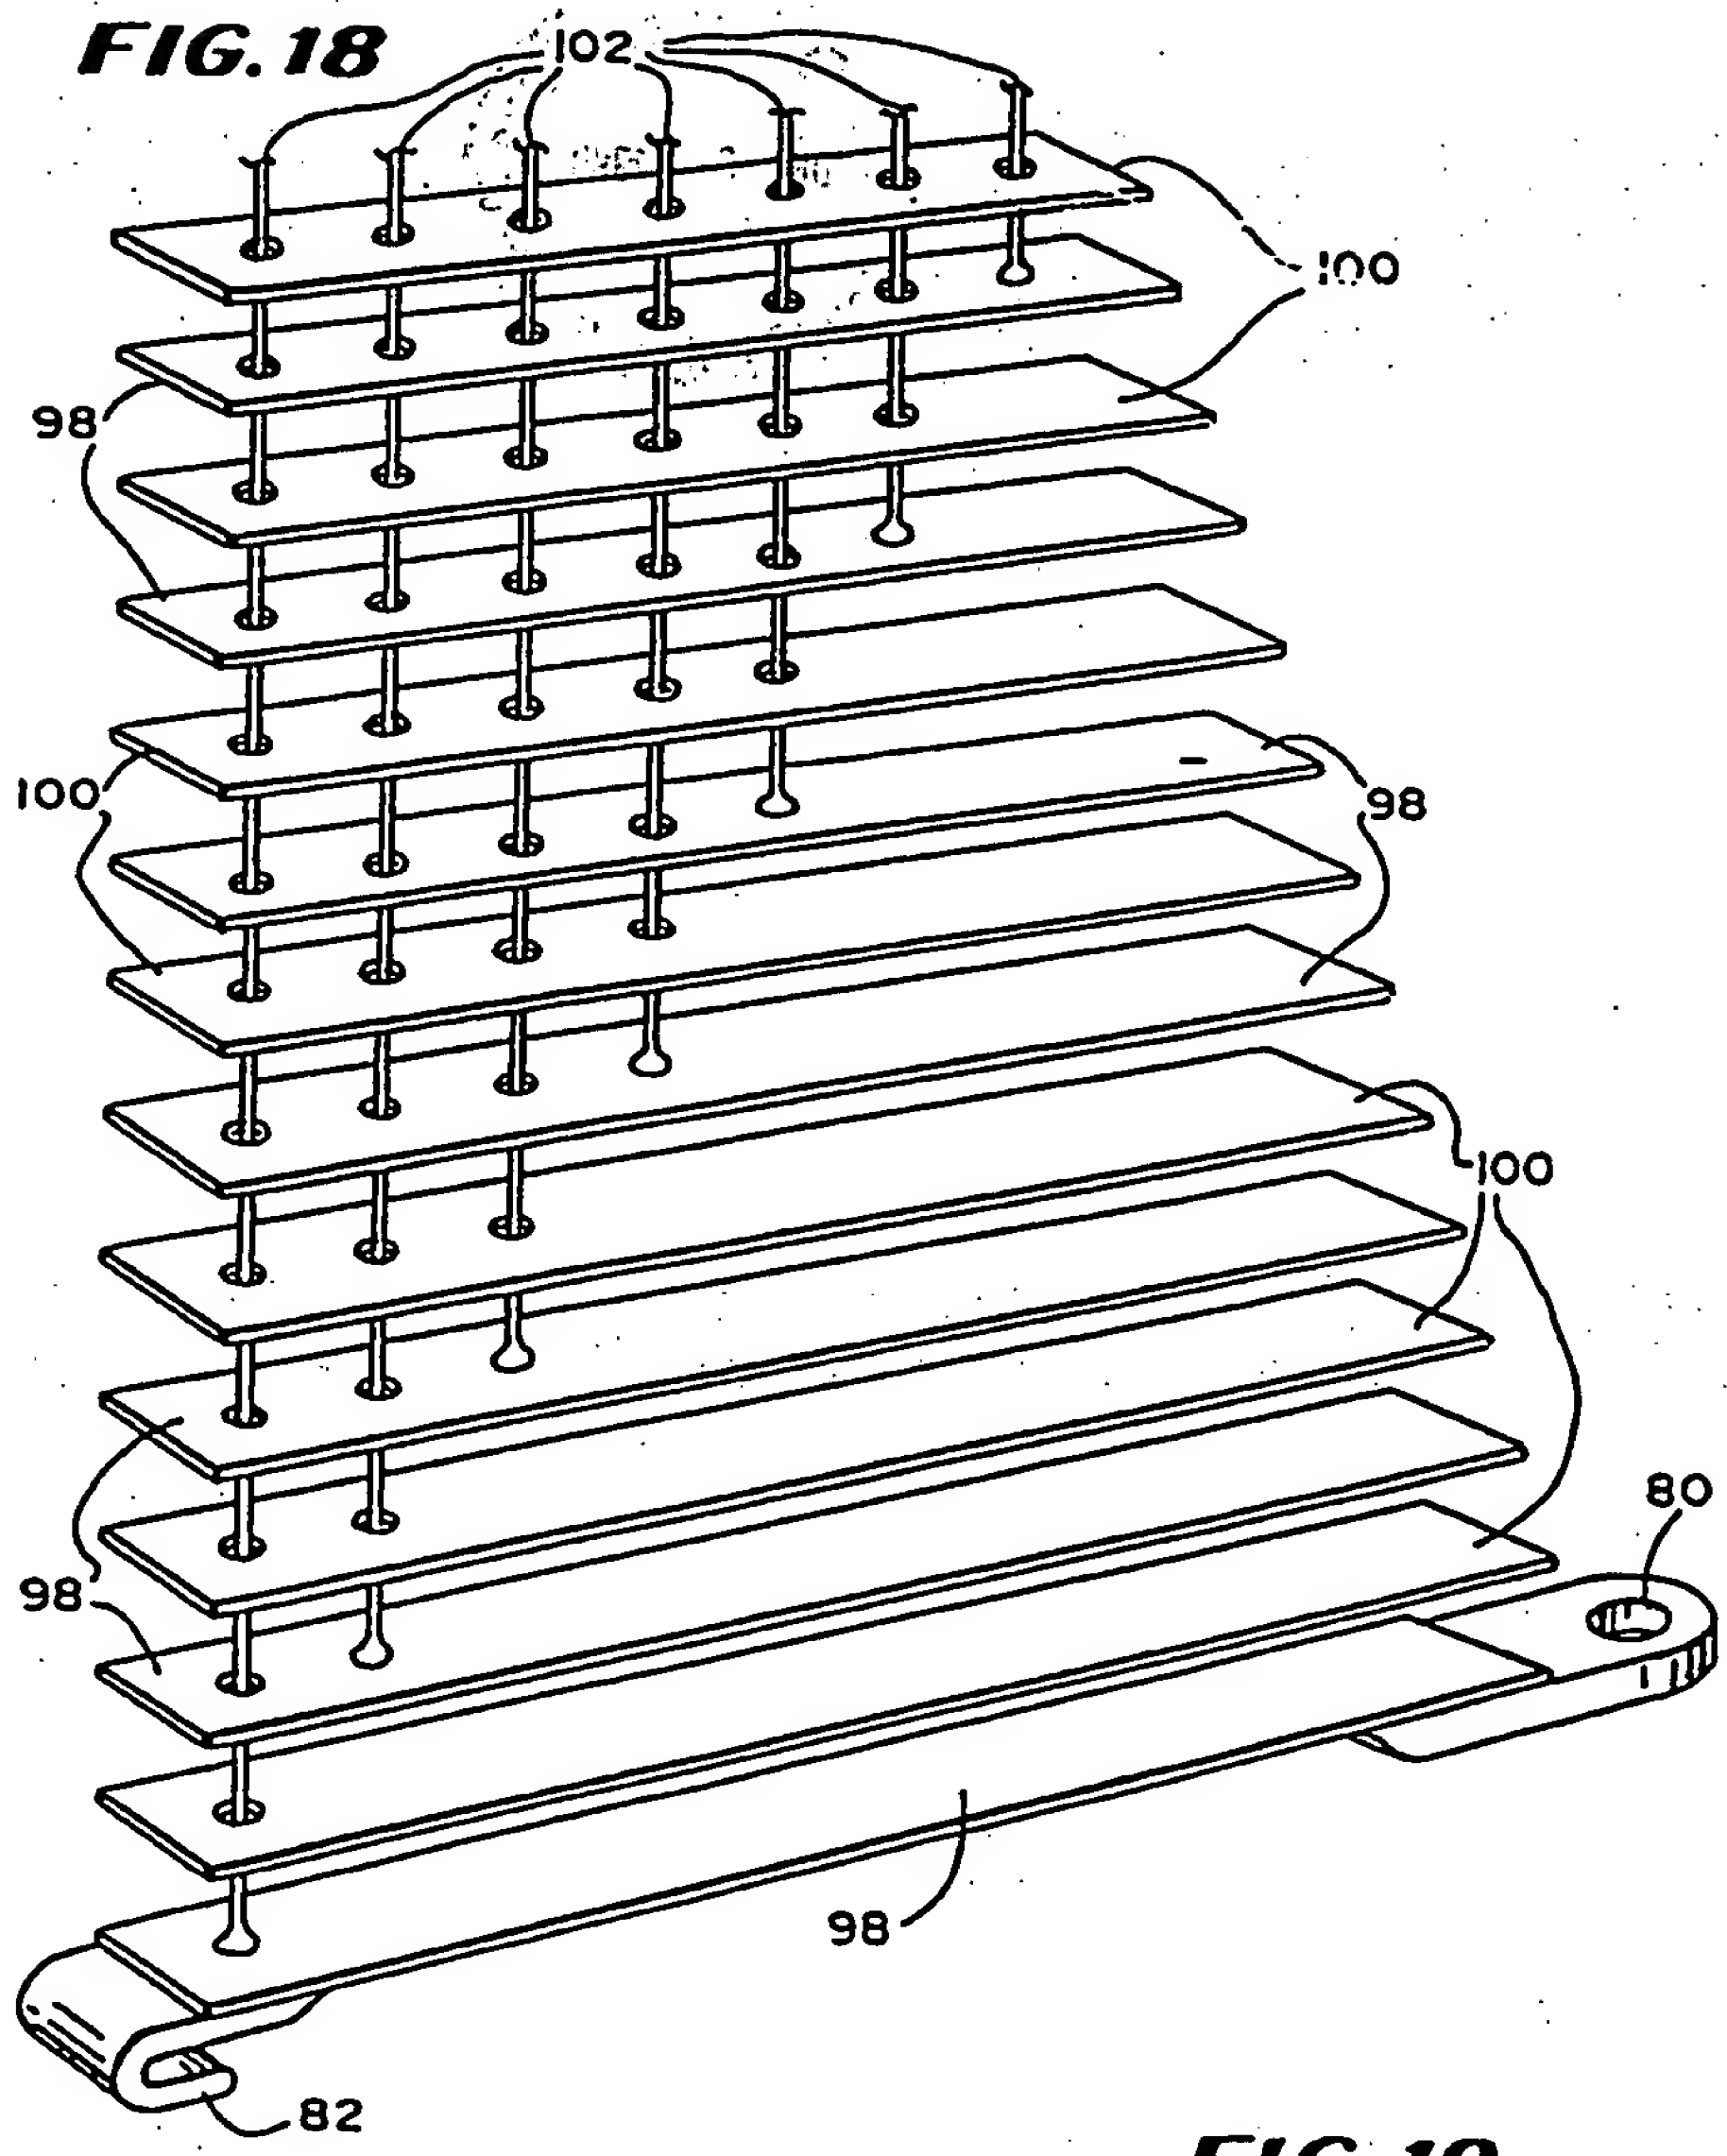


FIG. 20

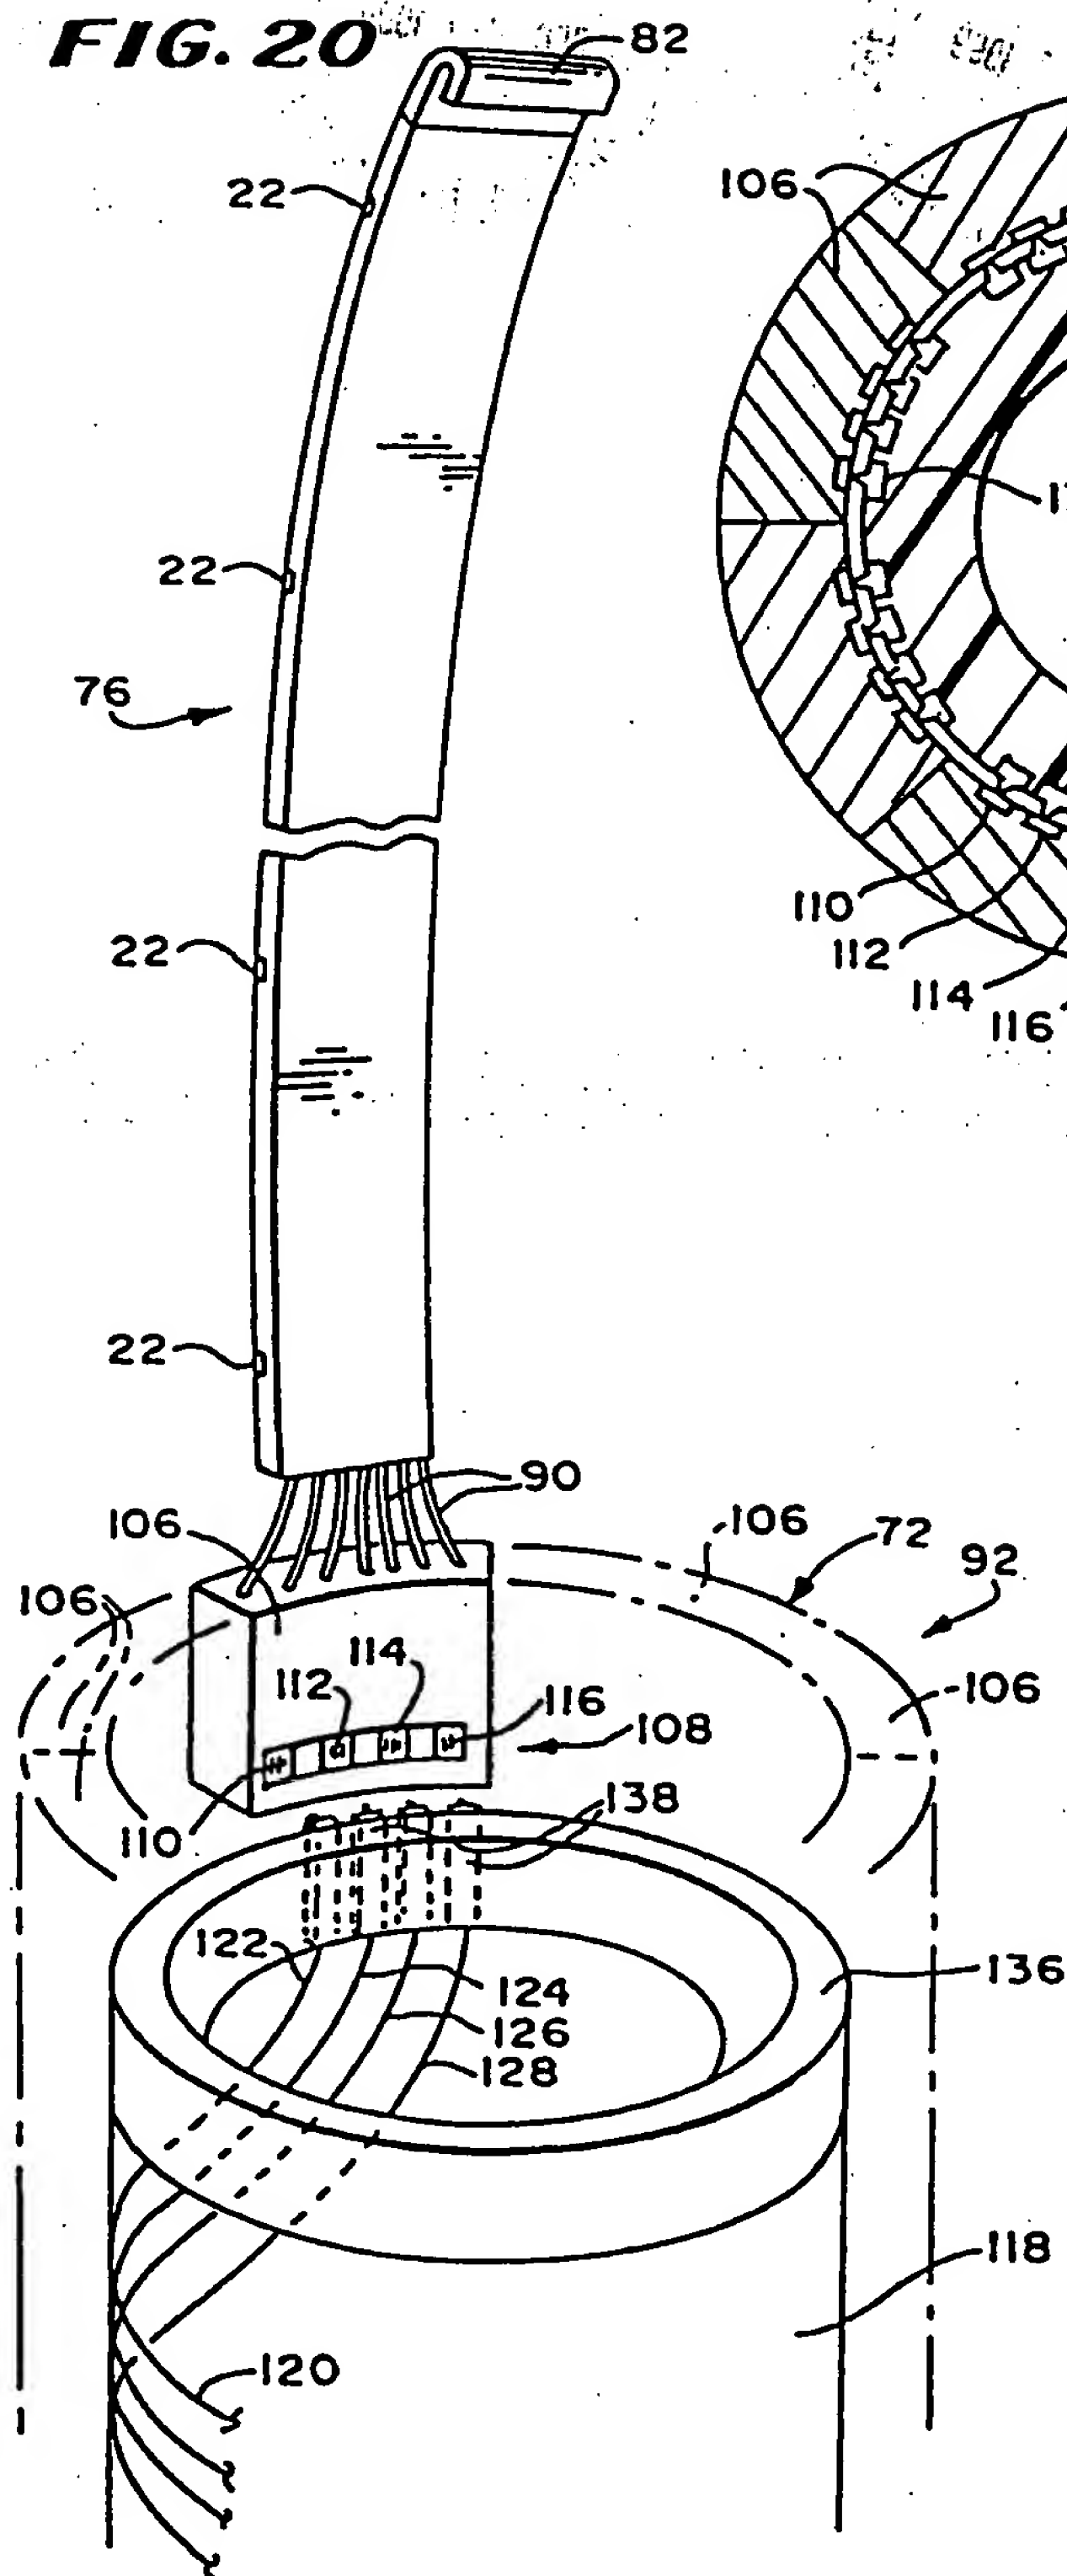


FIG. 21

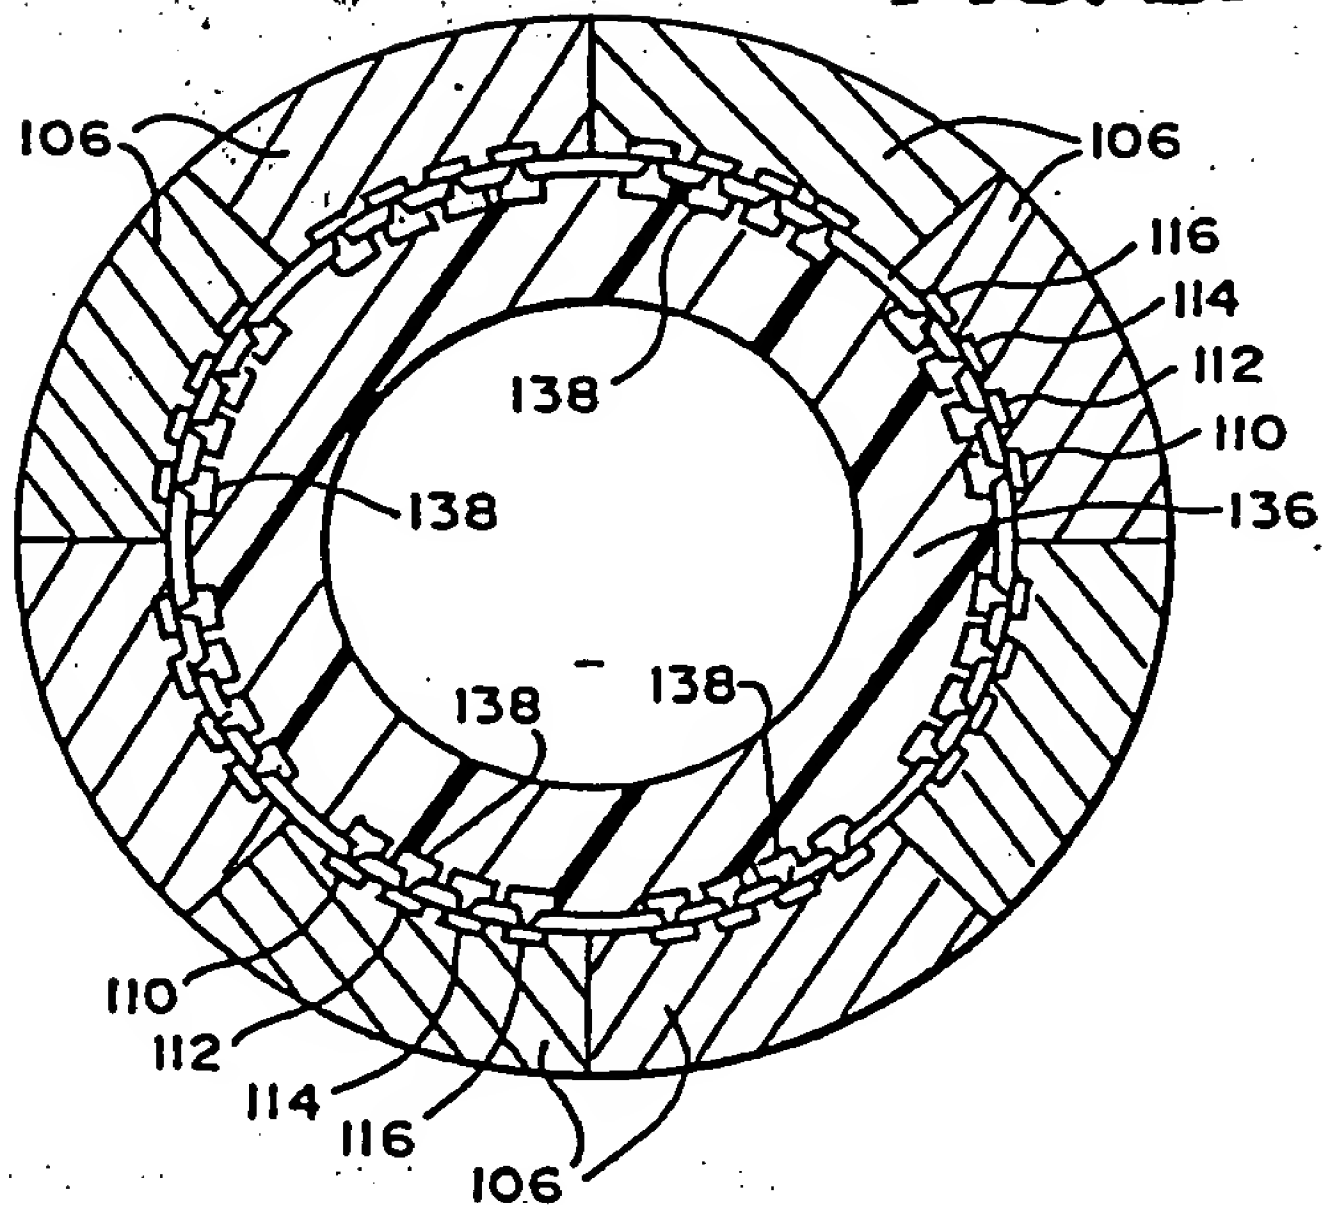
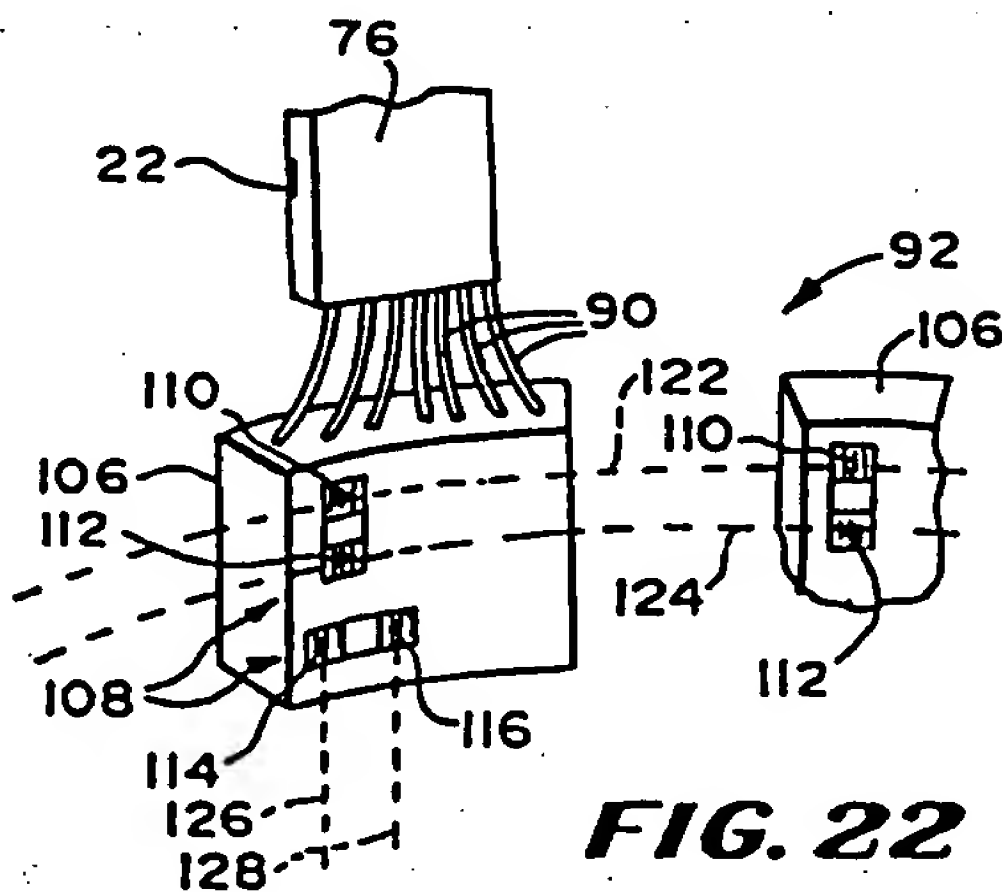


FIG. 22



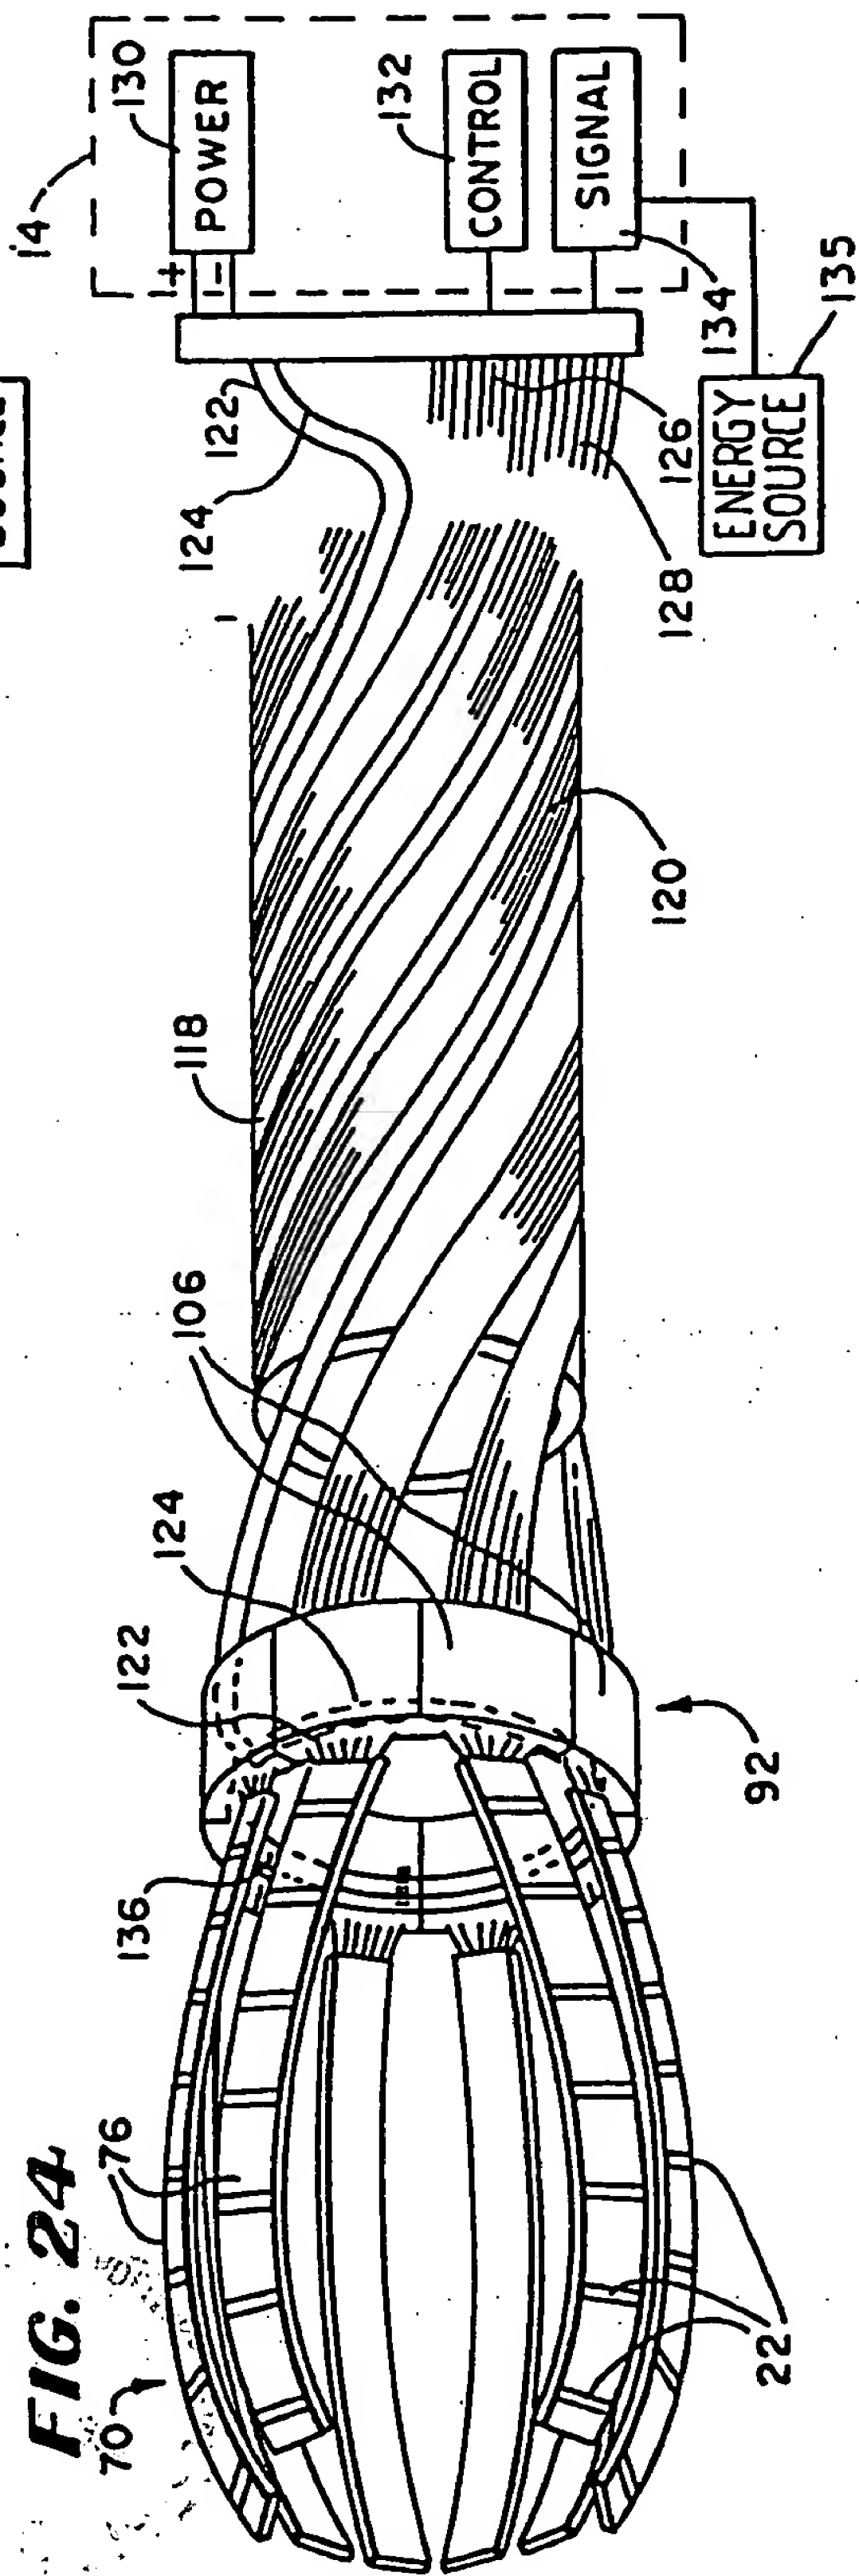
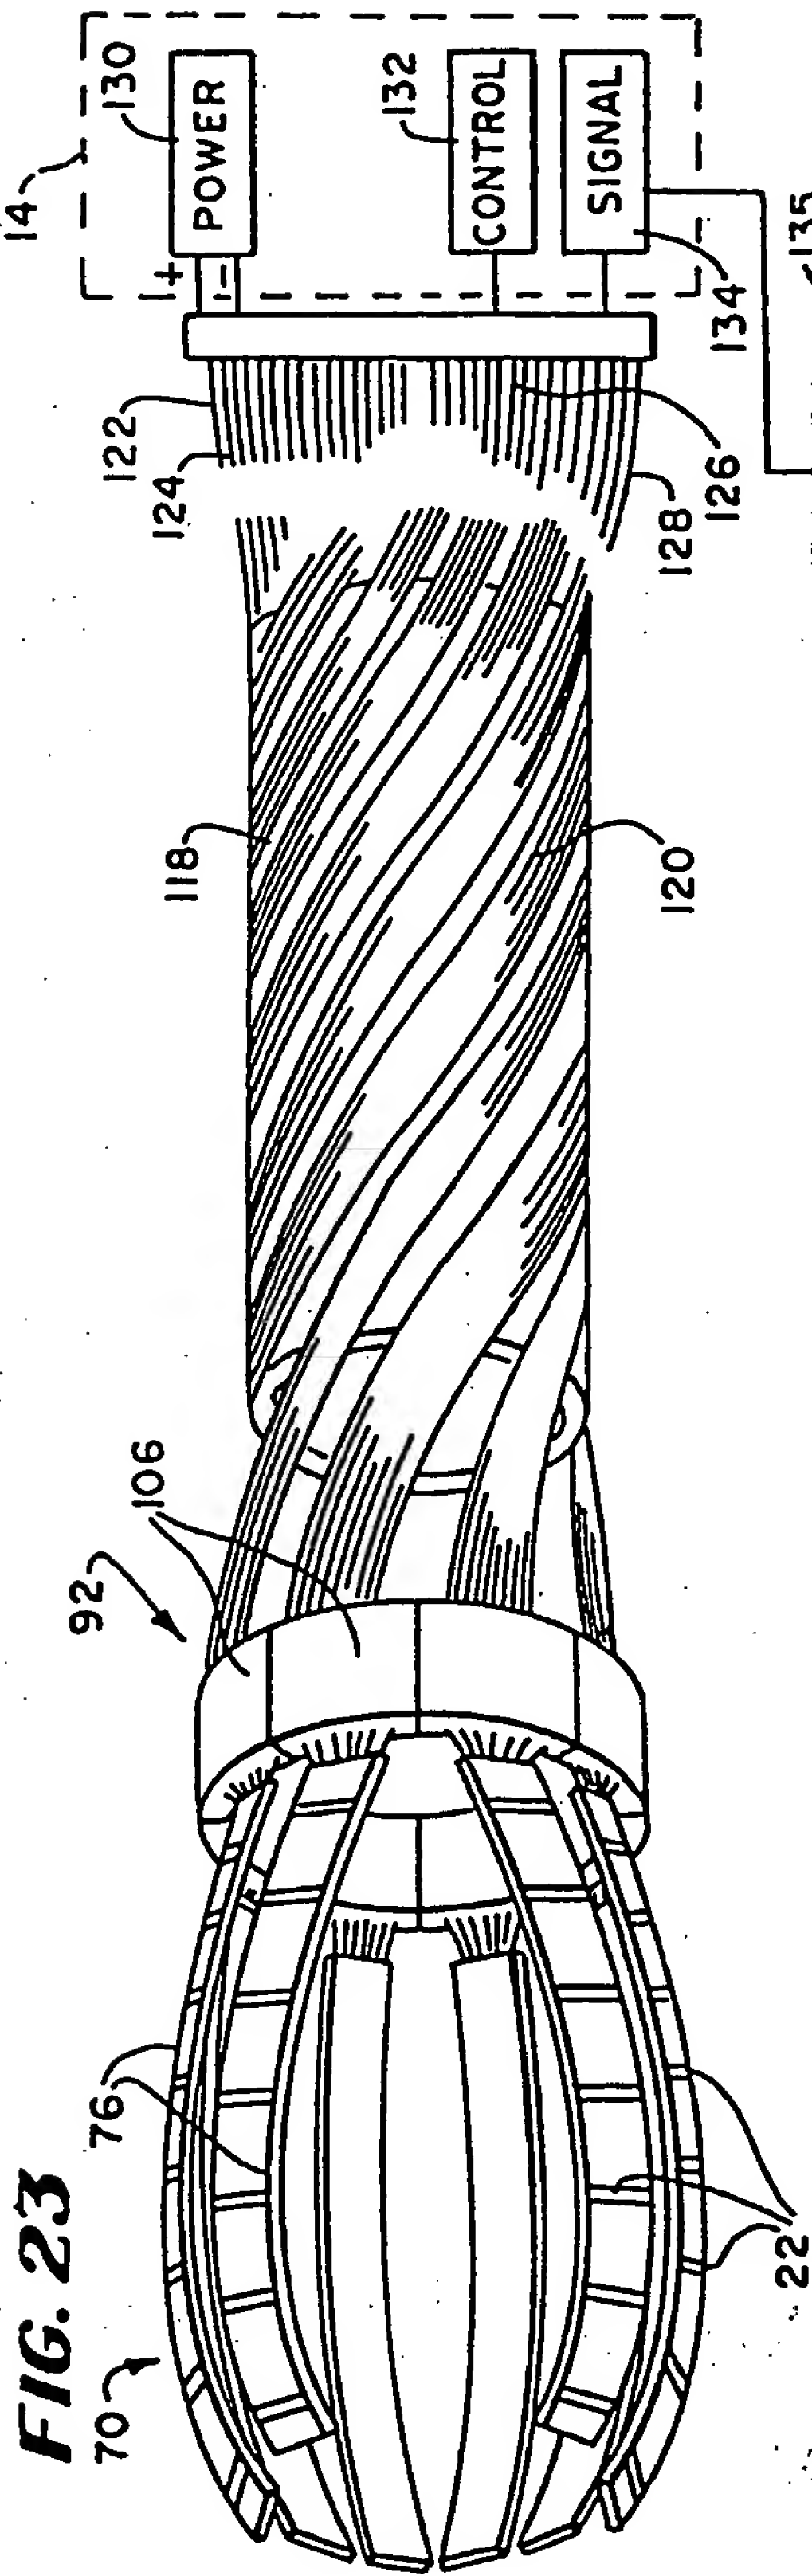


FIG. 25

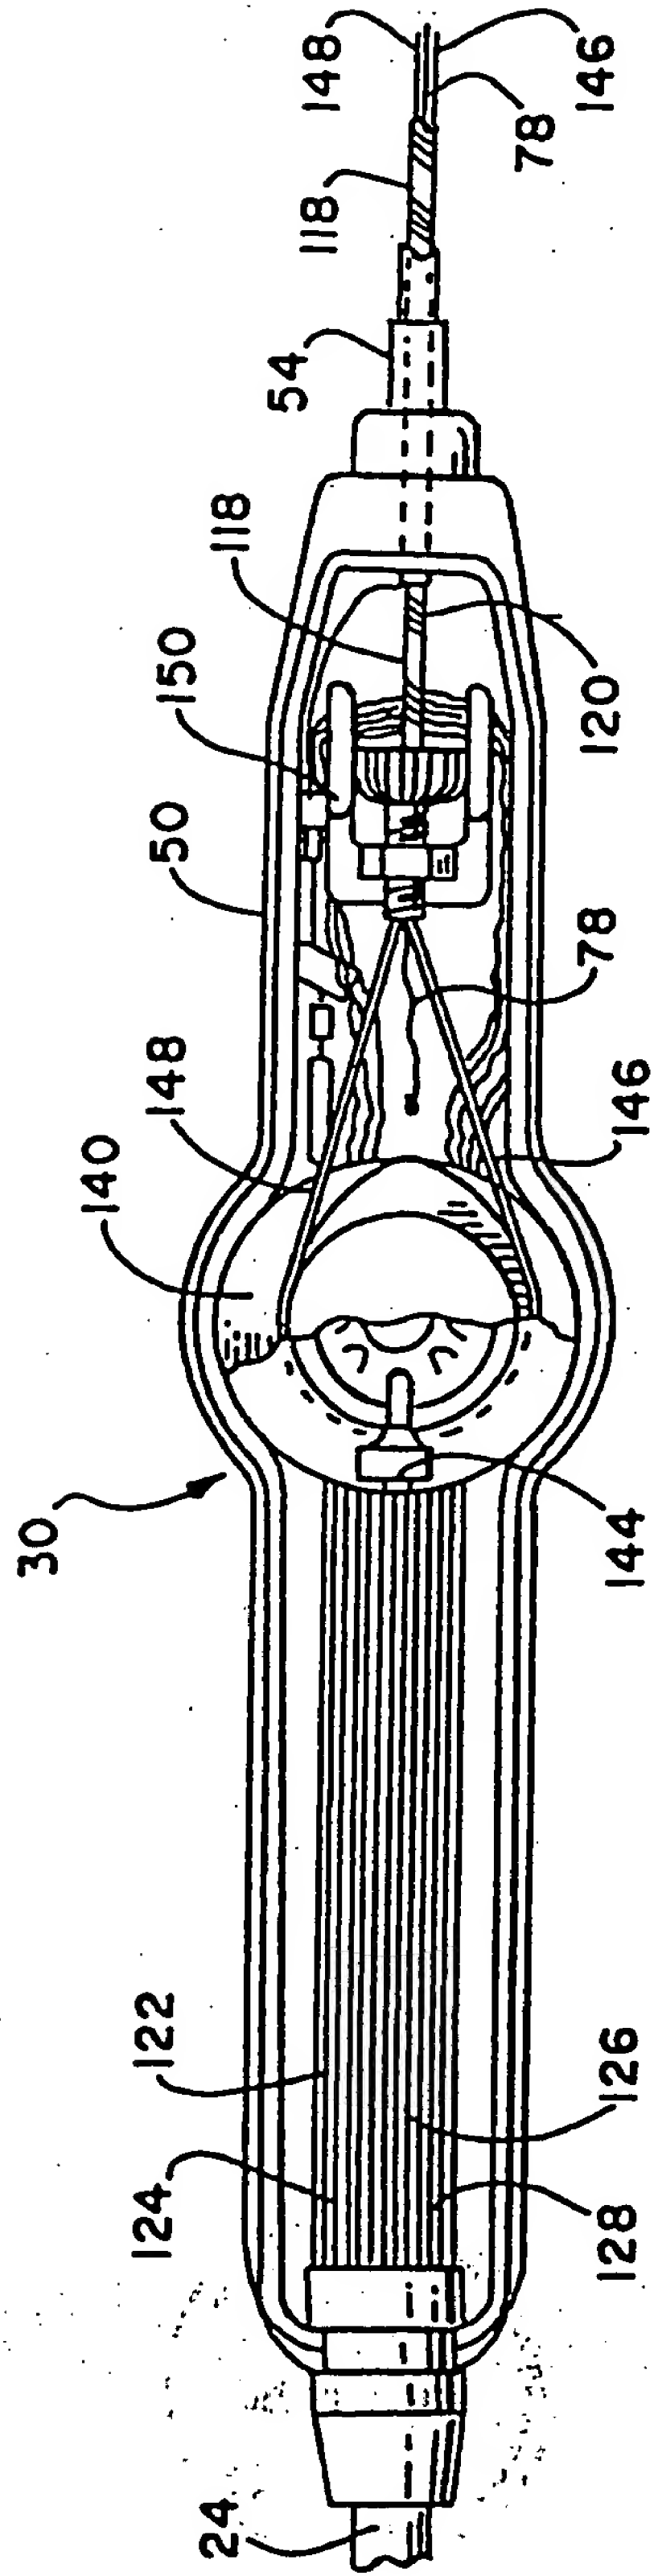


FIG. 26

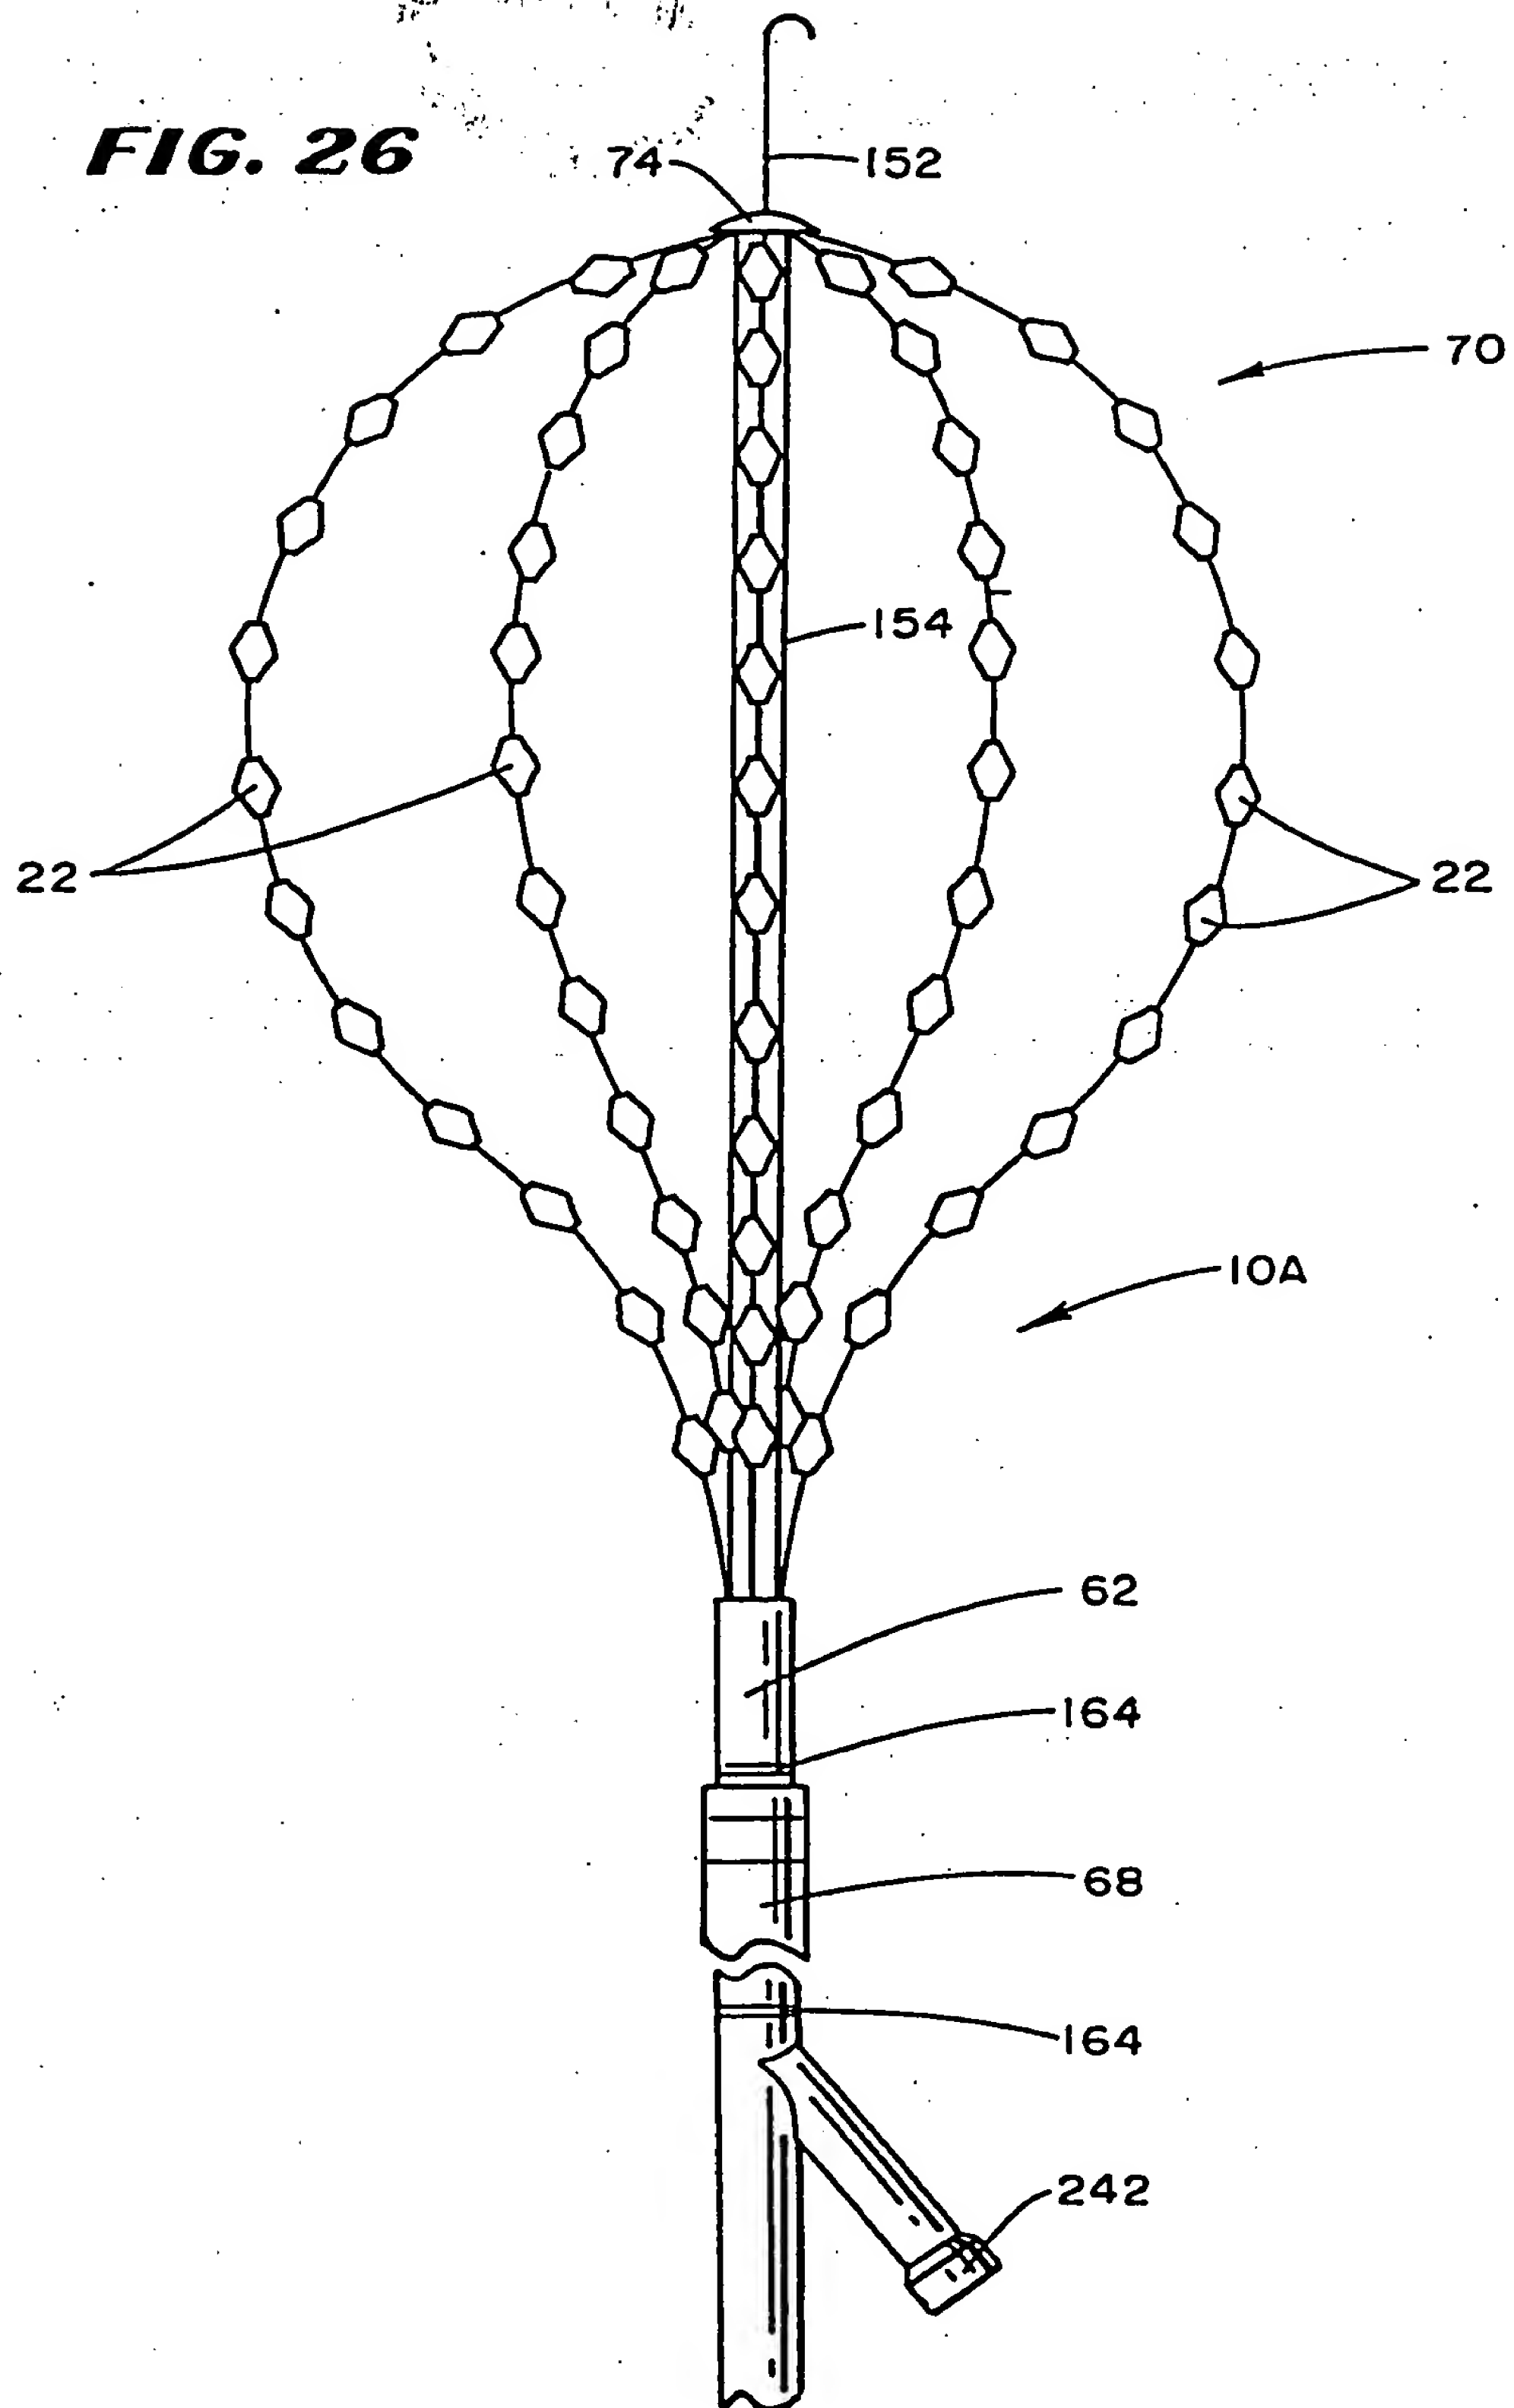


FIG. 27

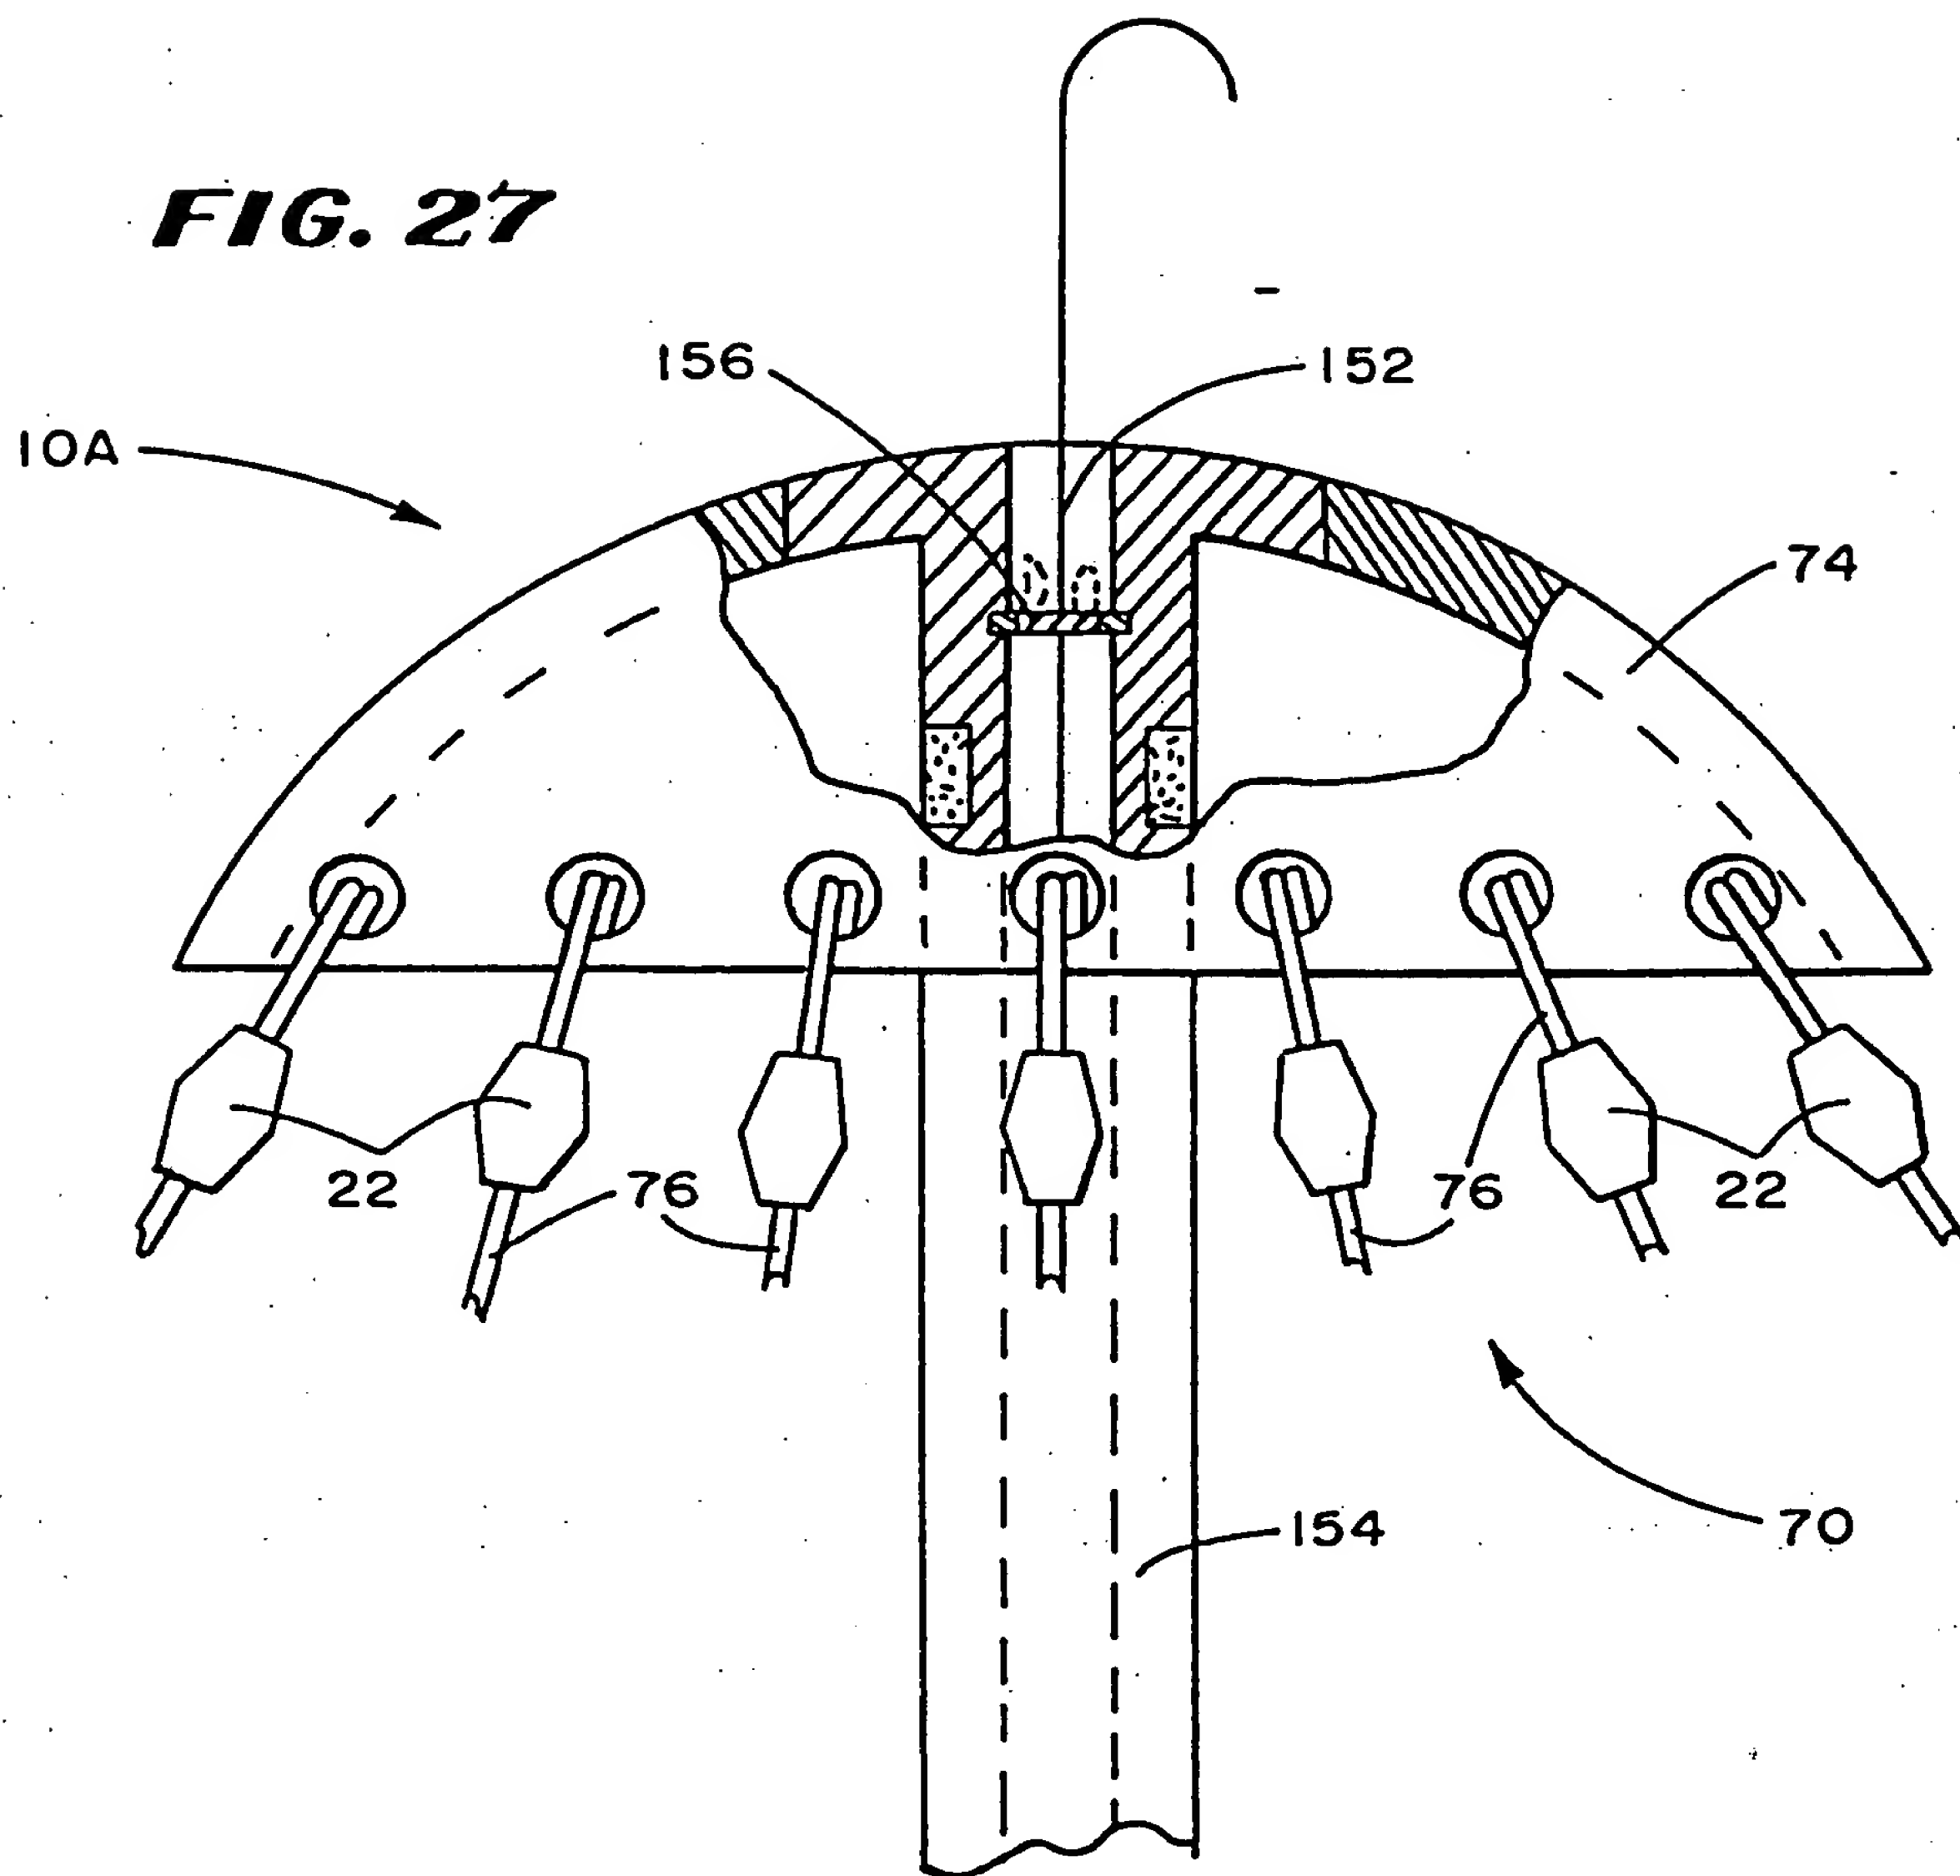


FIG. 28

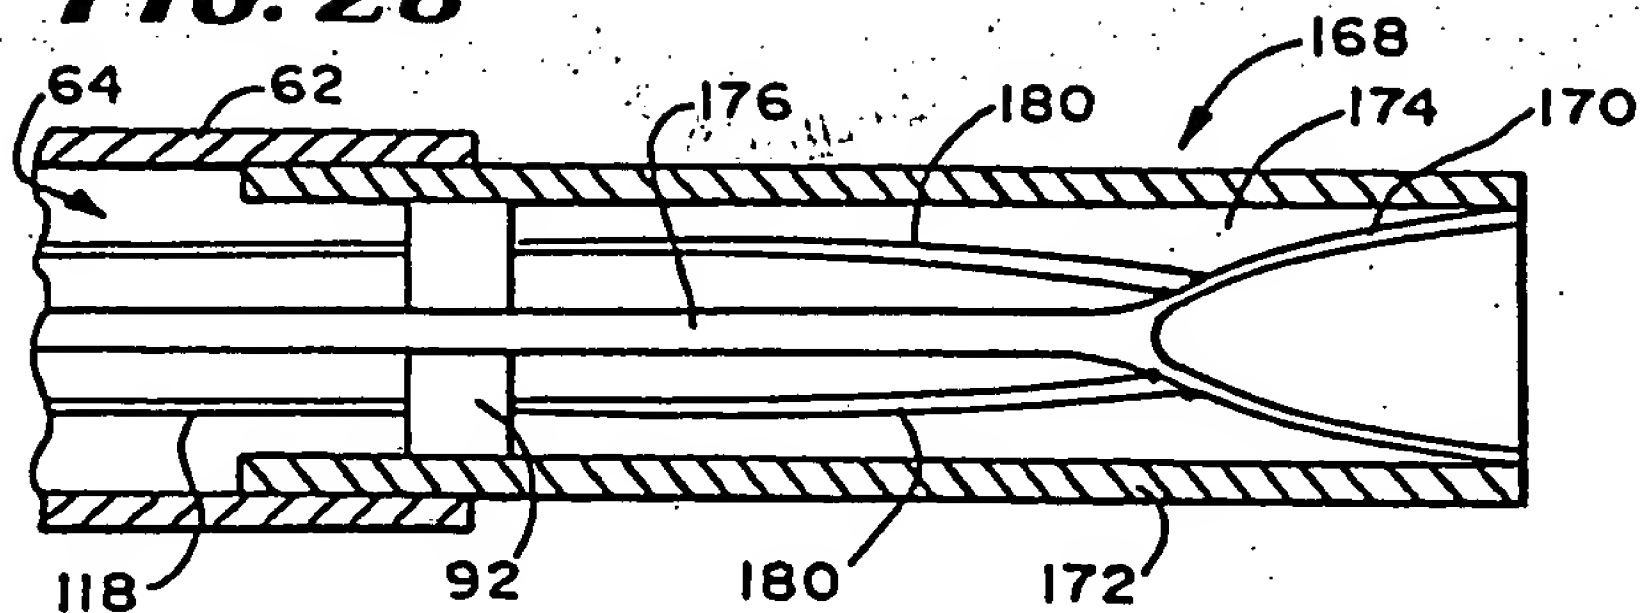


FIG. 29

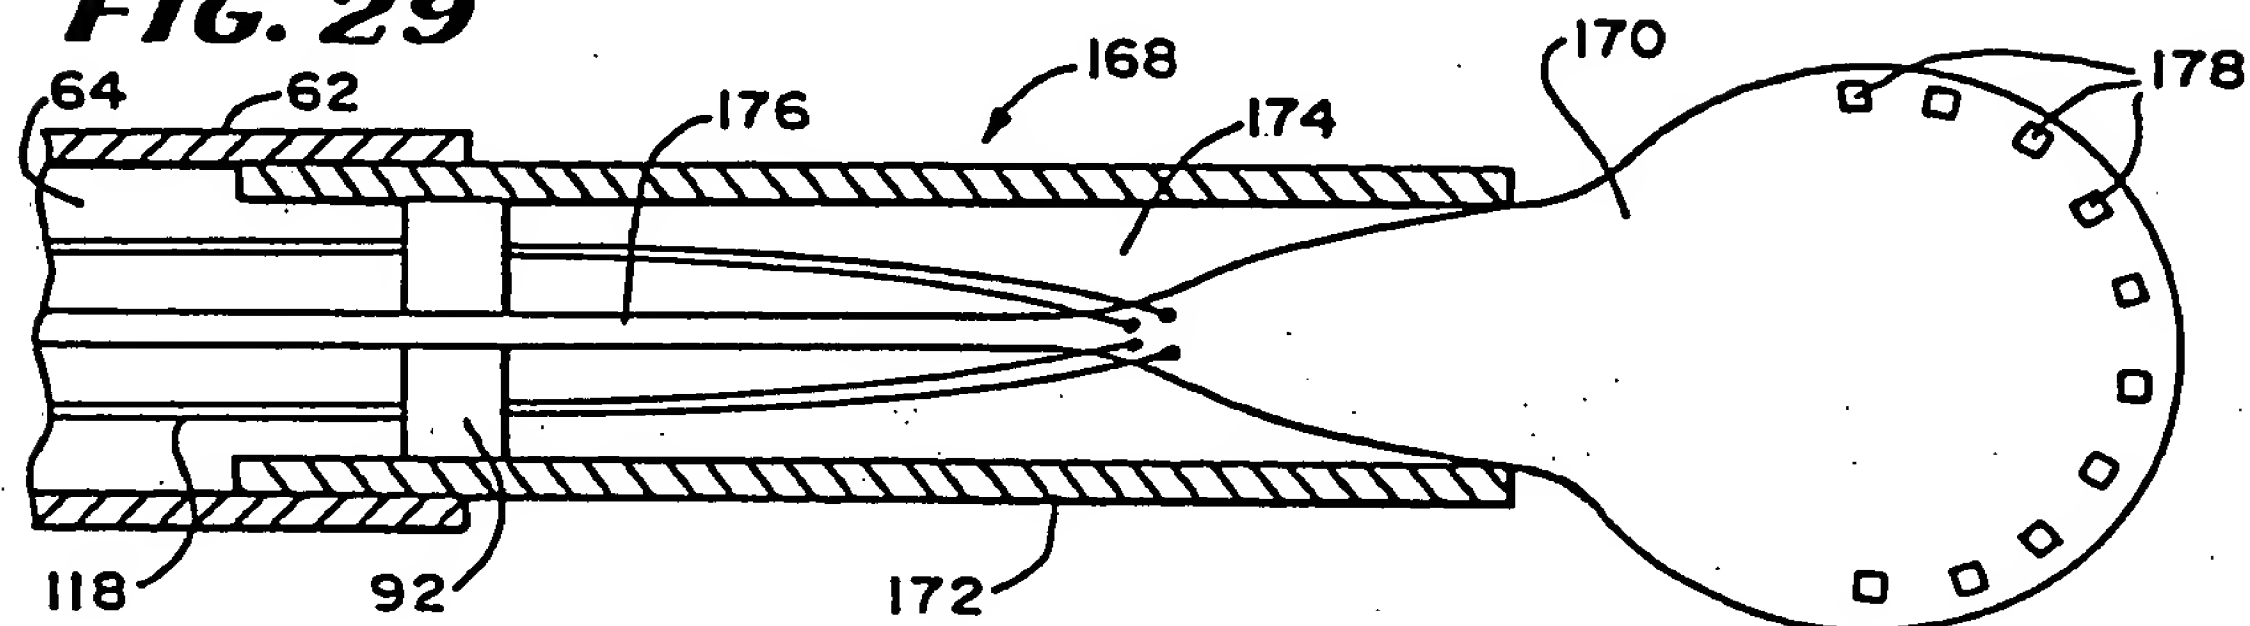


FIG. 30A

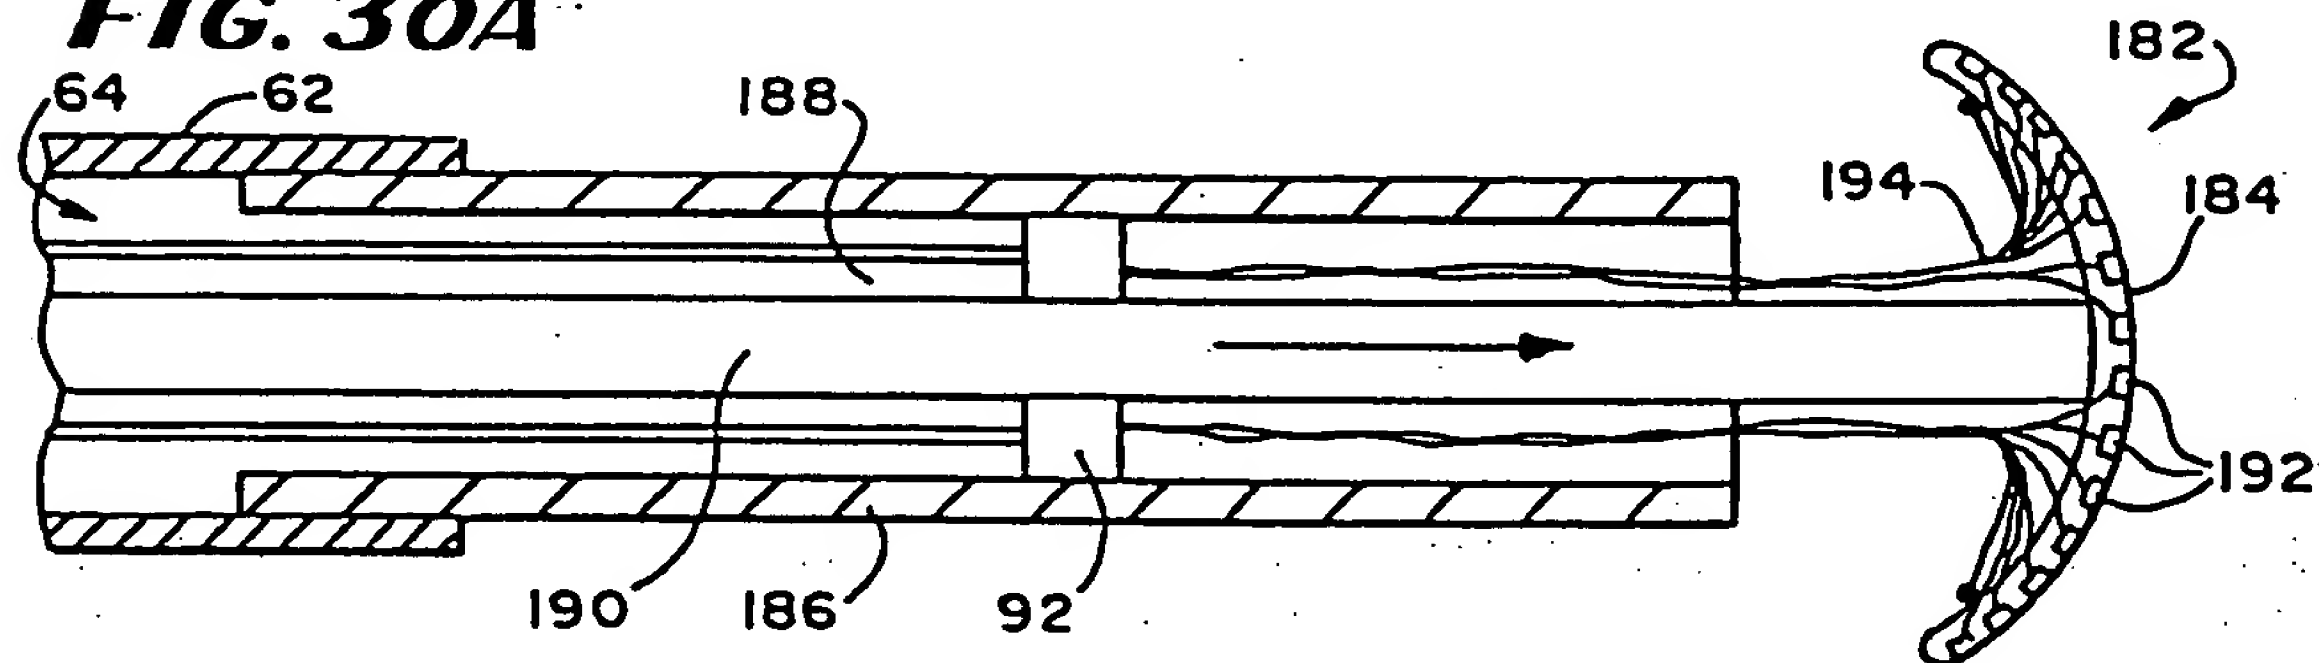


FIG. 30B

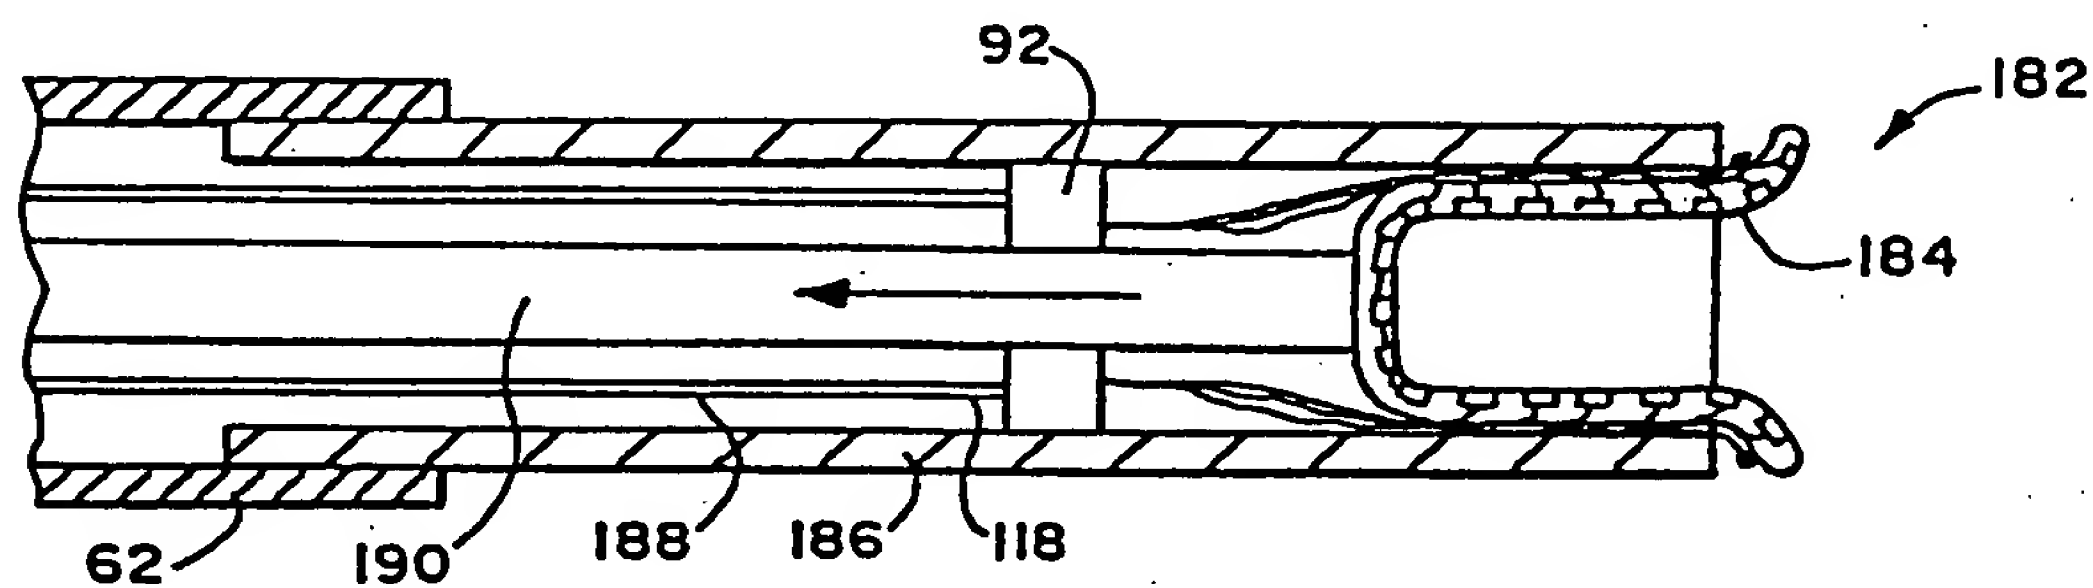


FIG. 31A

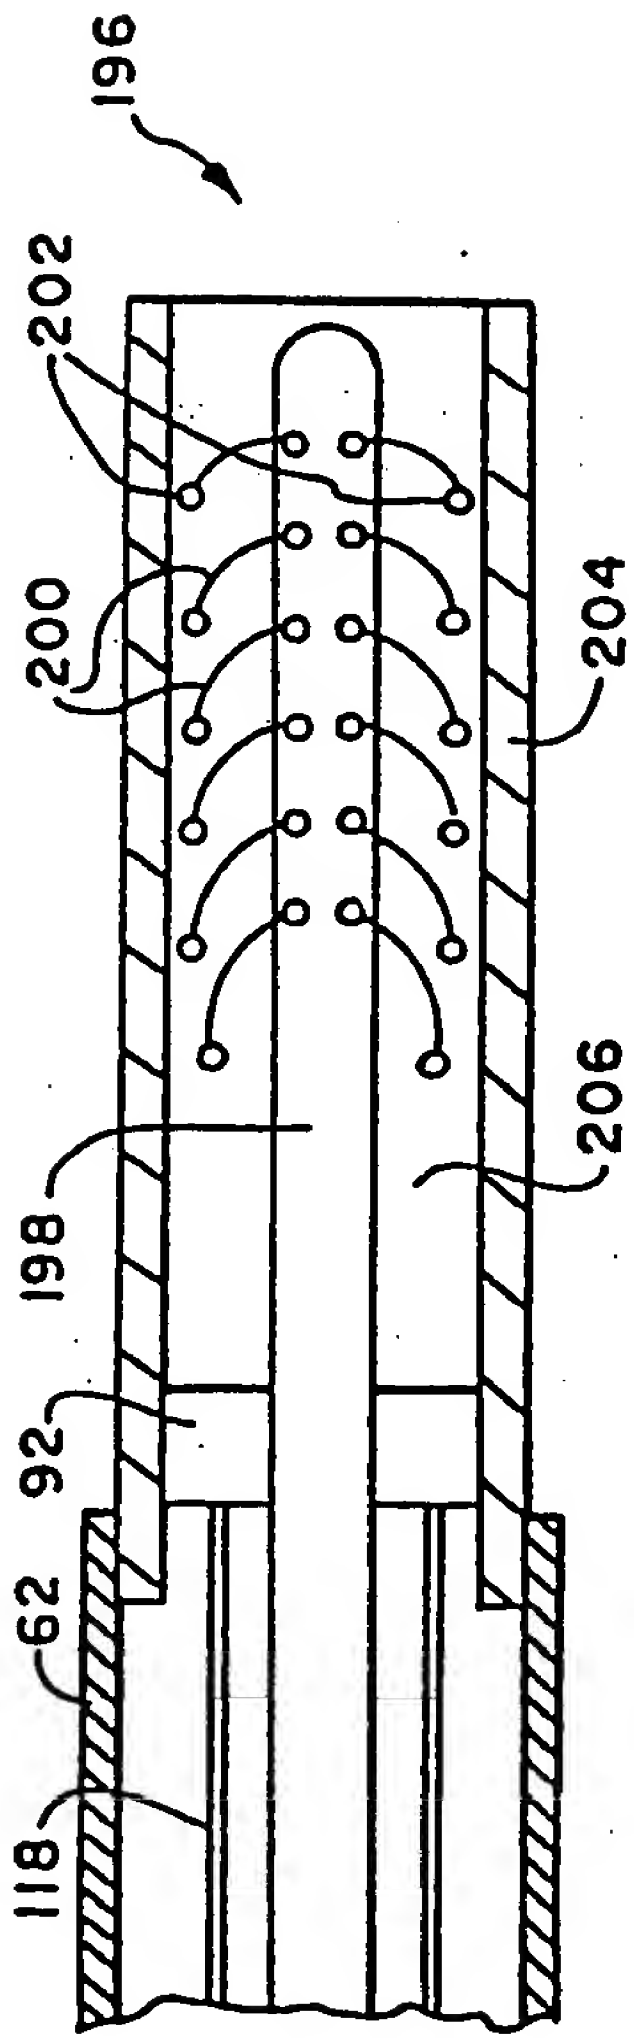


FIG. 31B

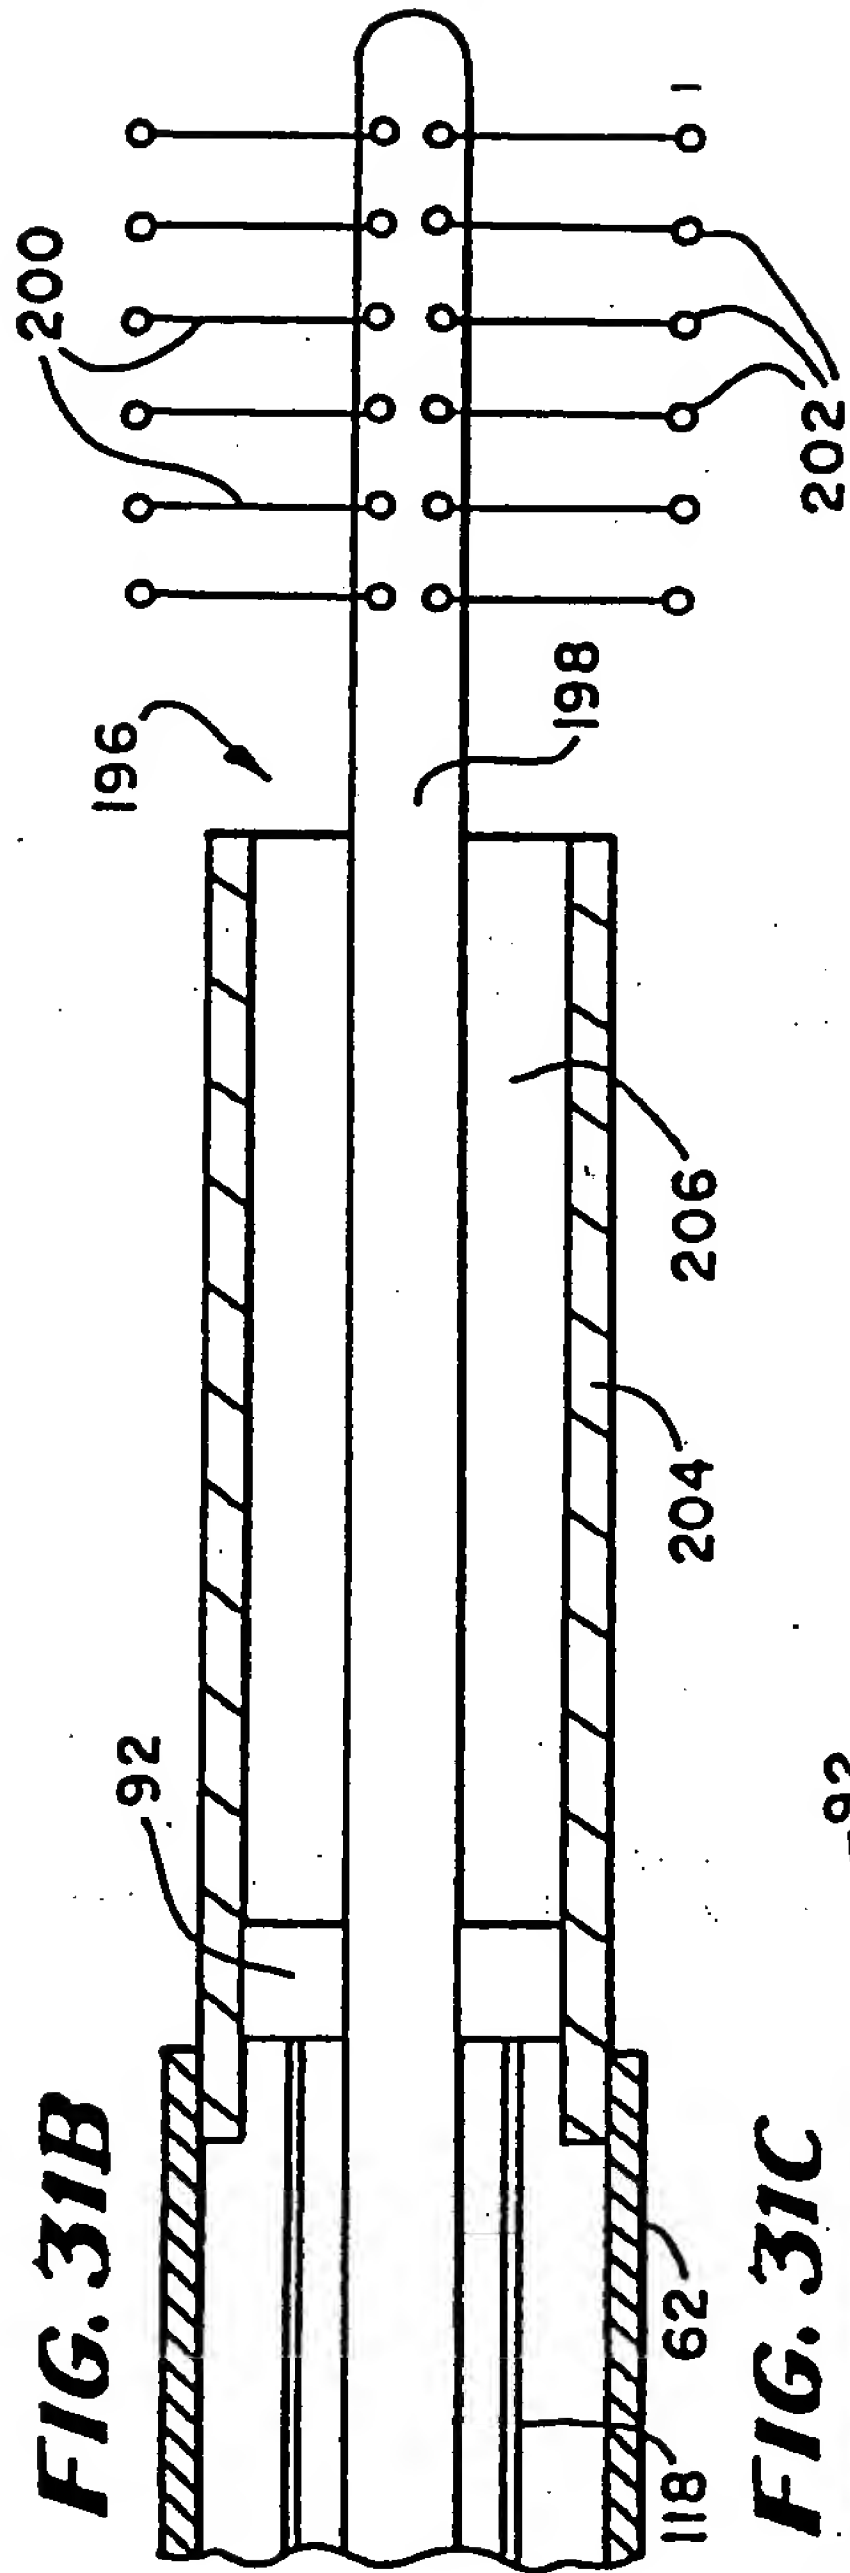


FIG. 31C

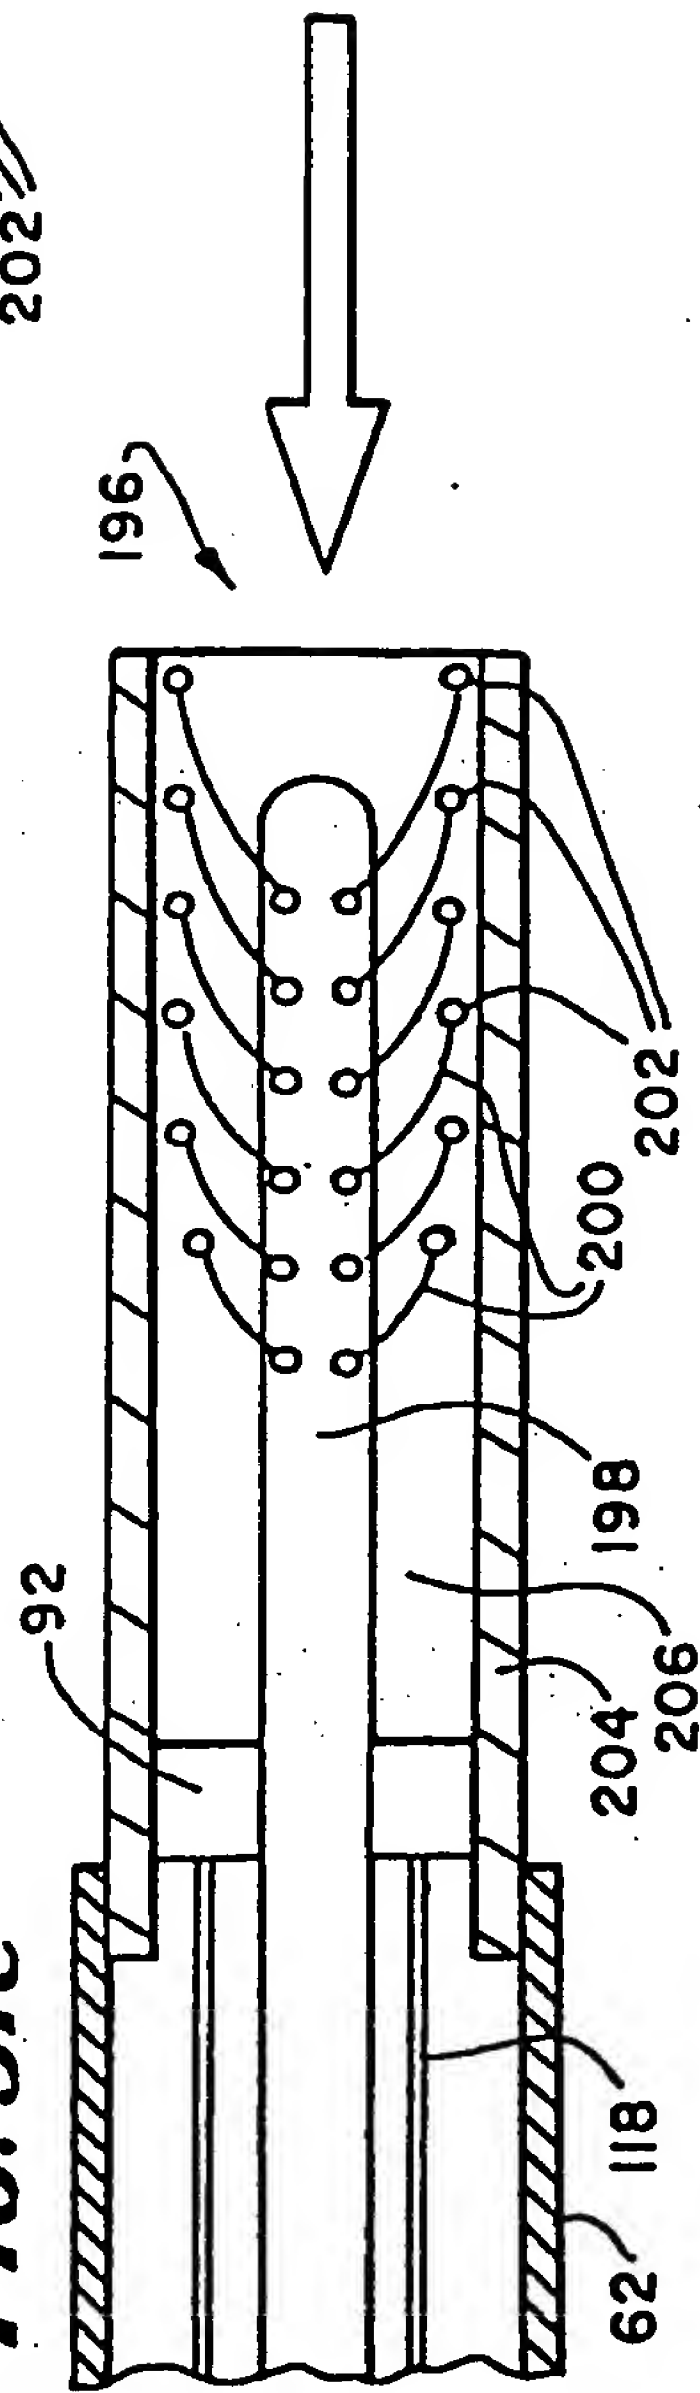


FIG. 32A

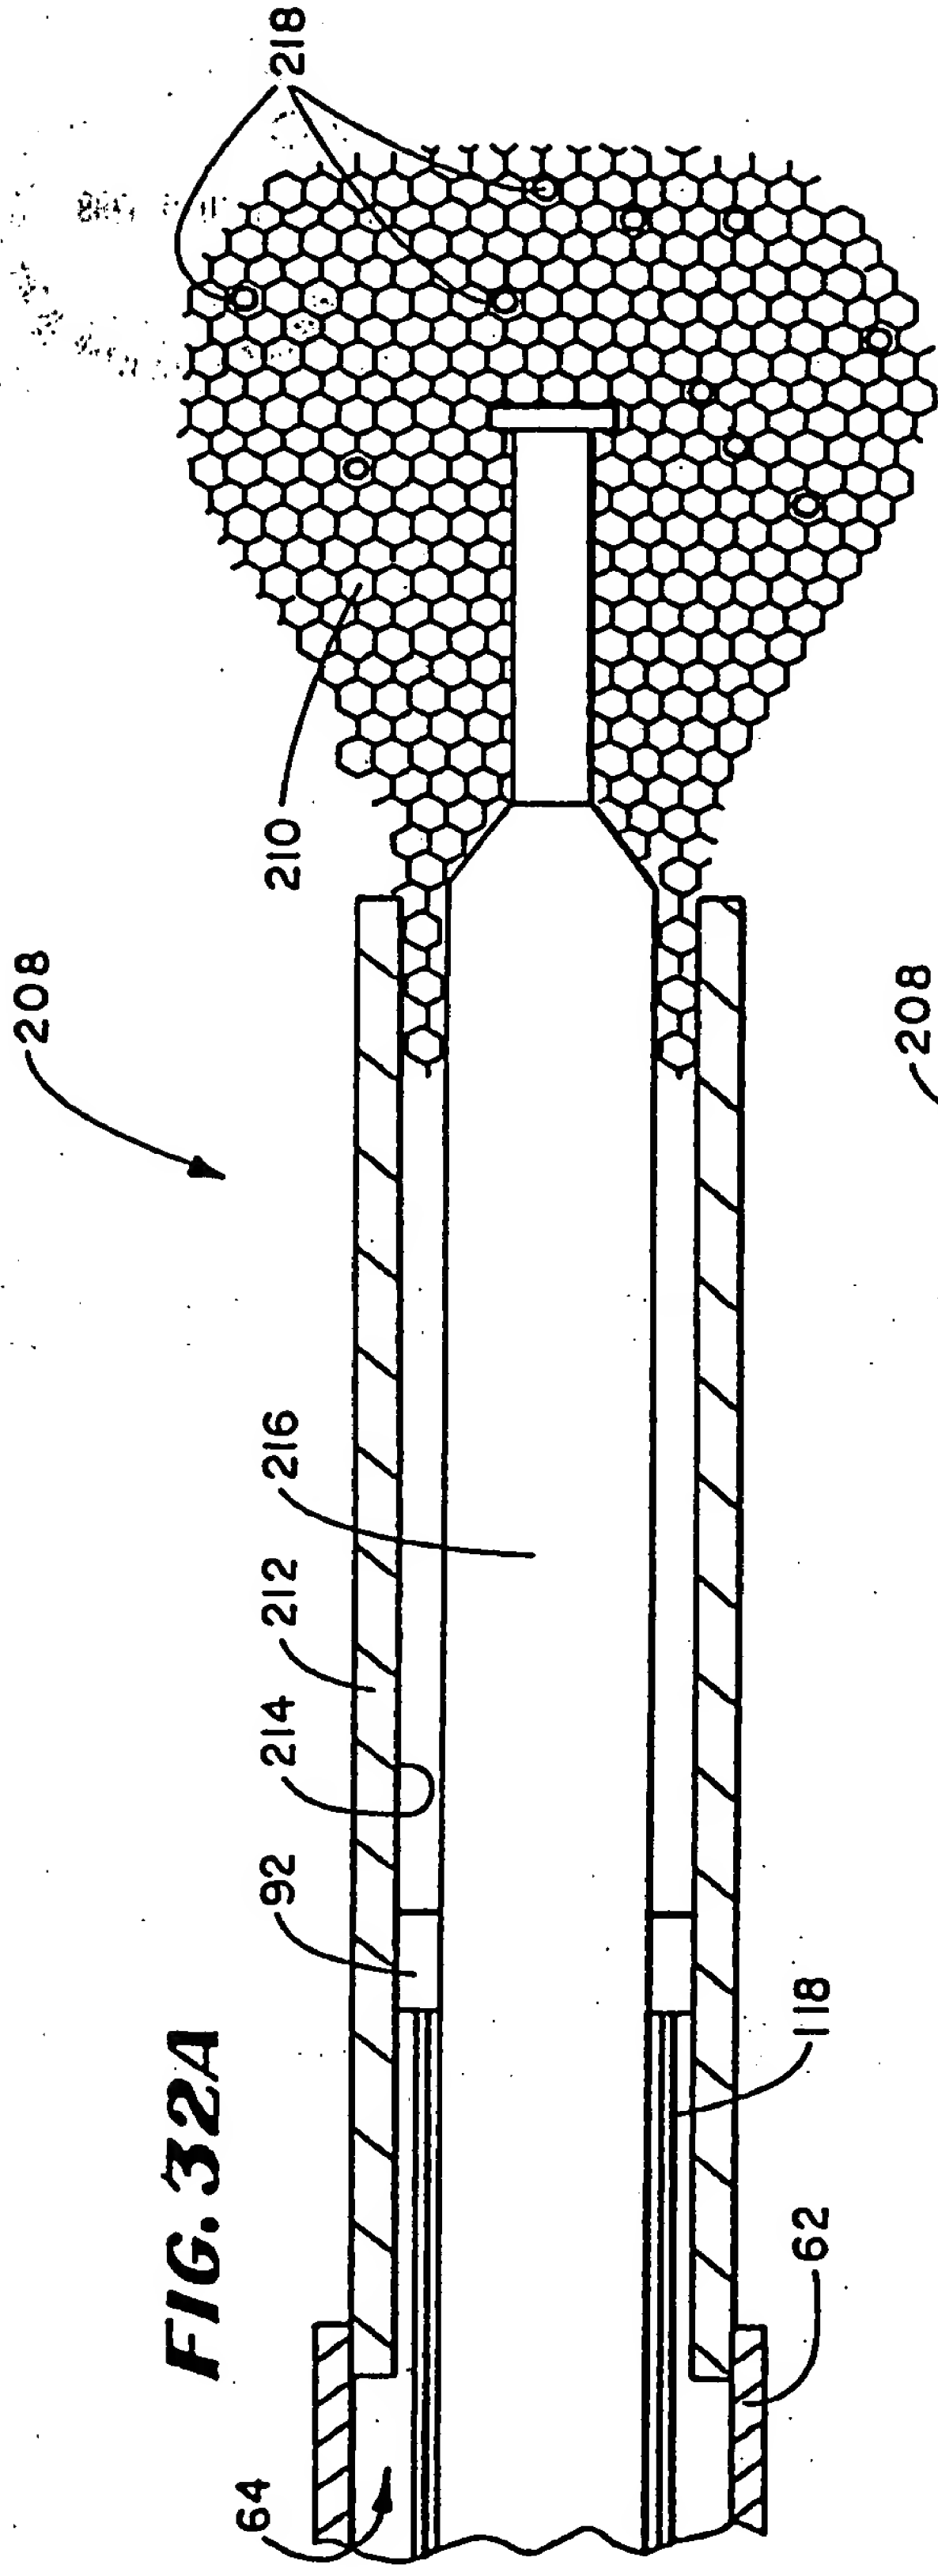


FIG. 32B

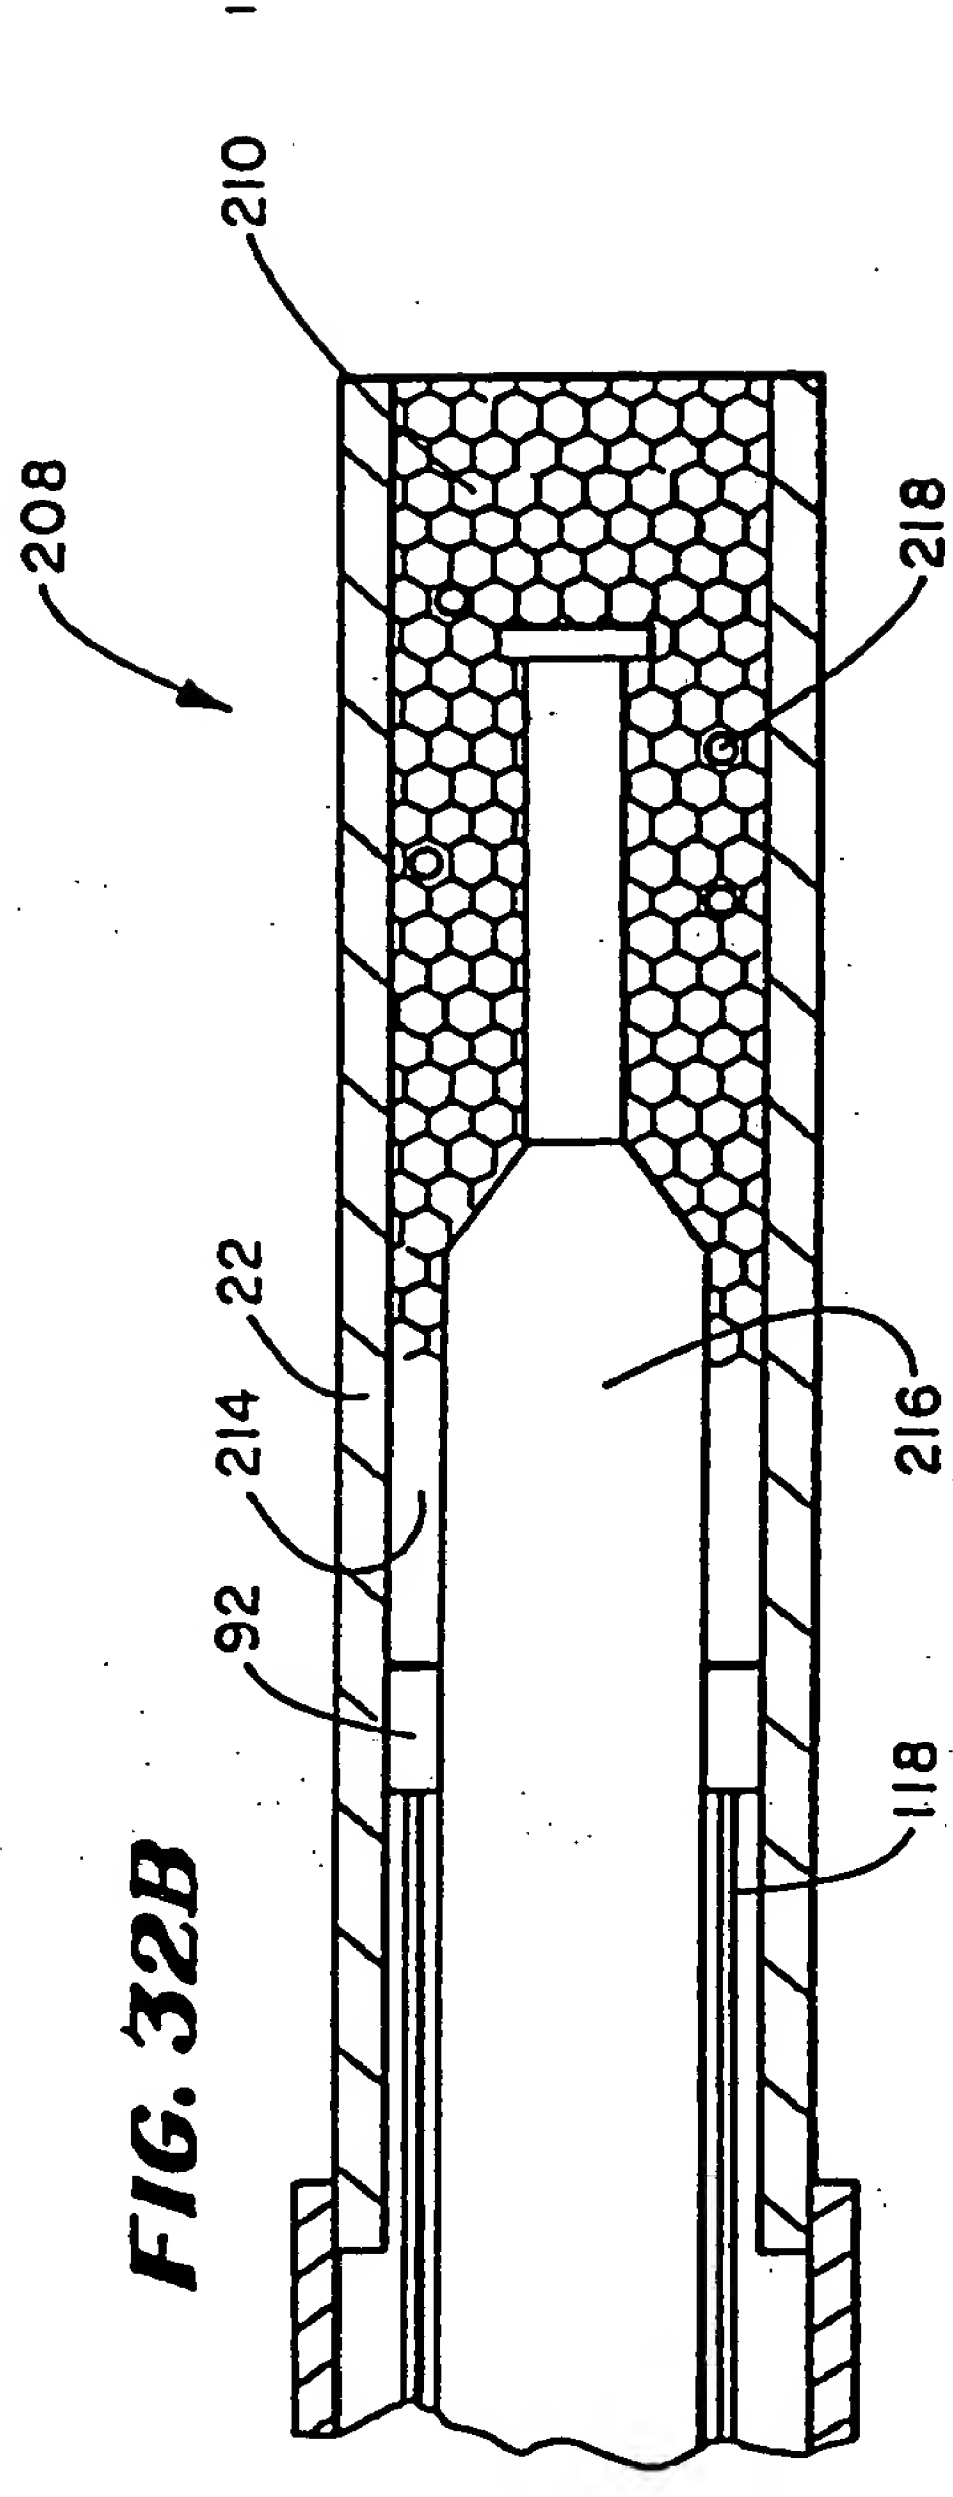


FIG. 33

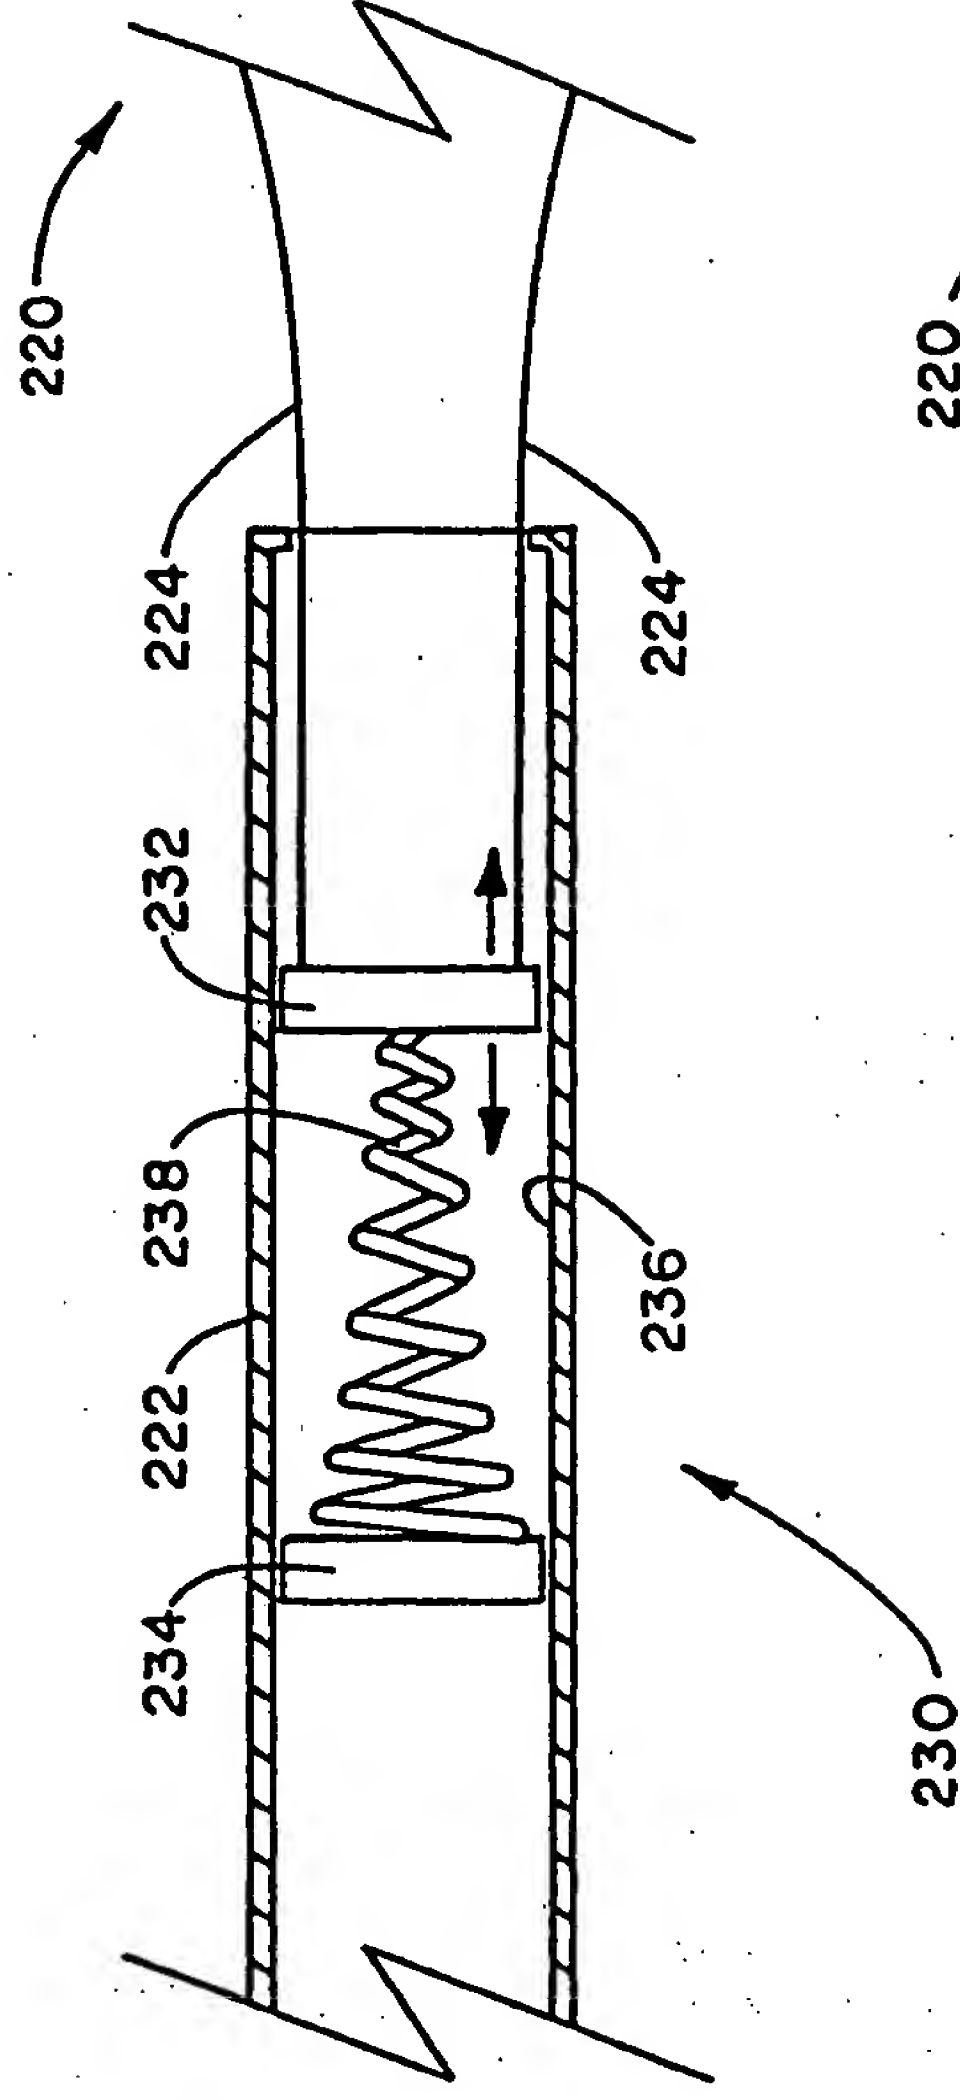


FIG. 34

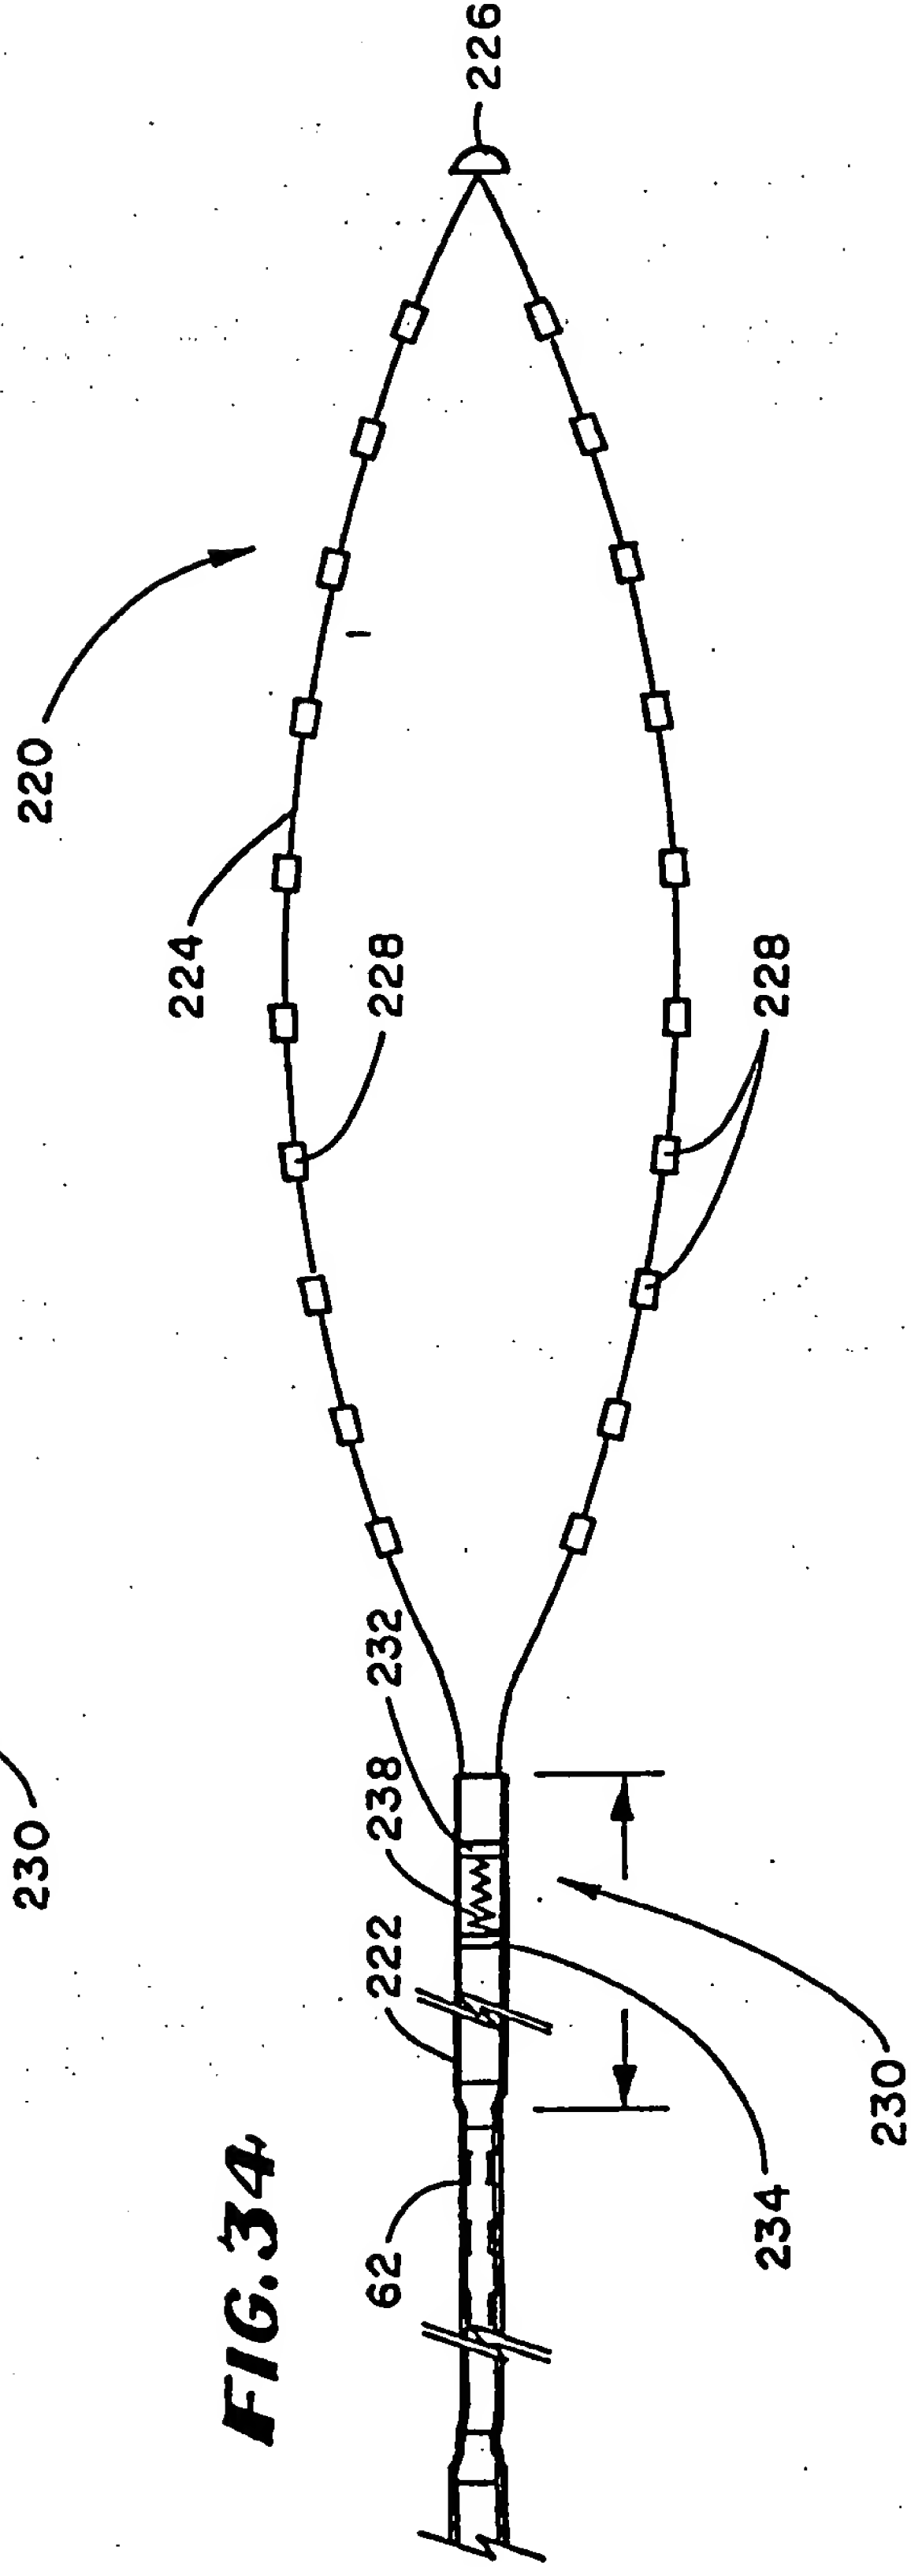


FIG. 35

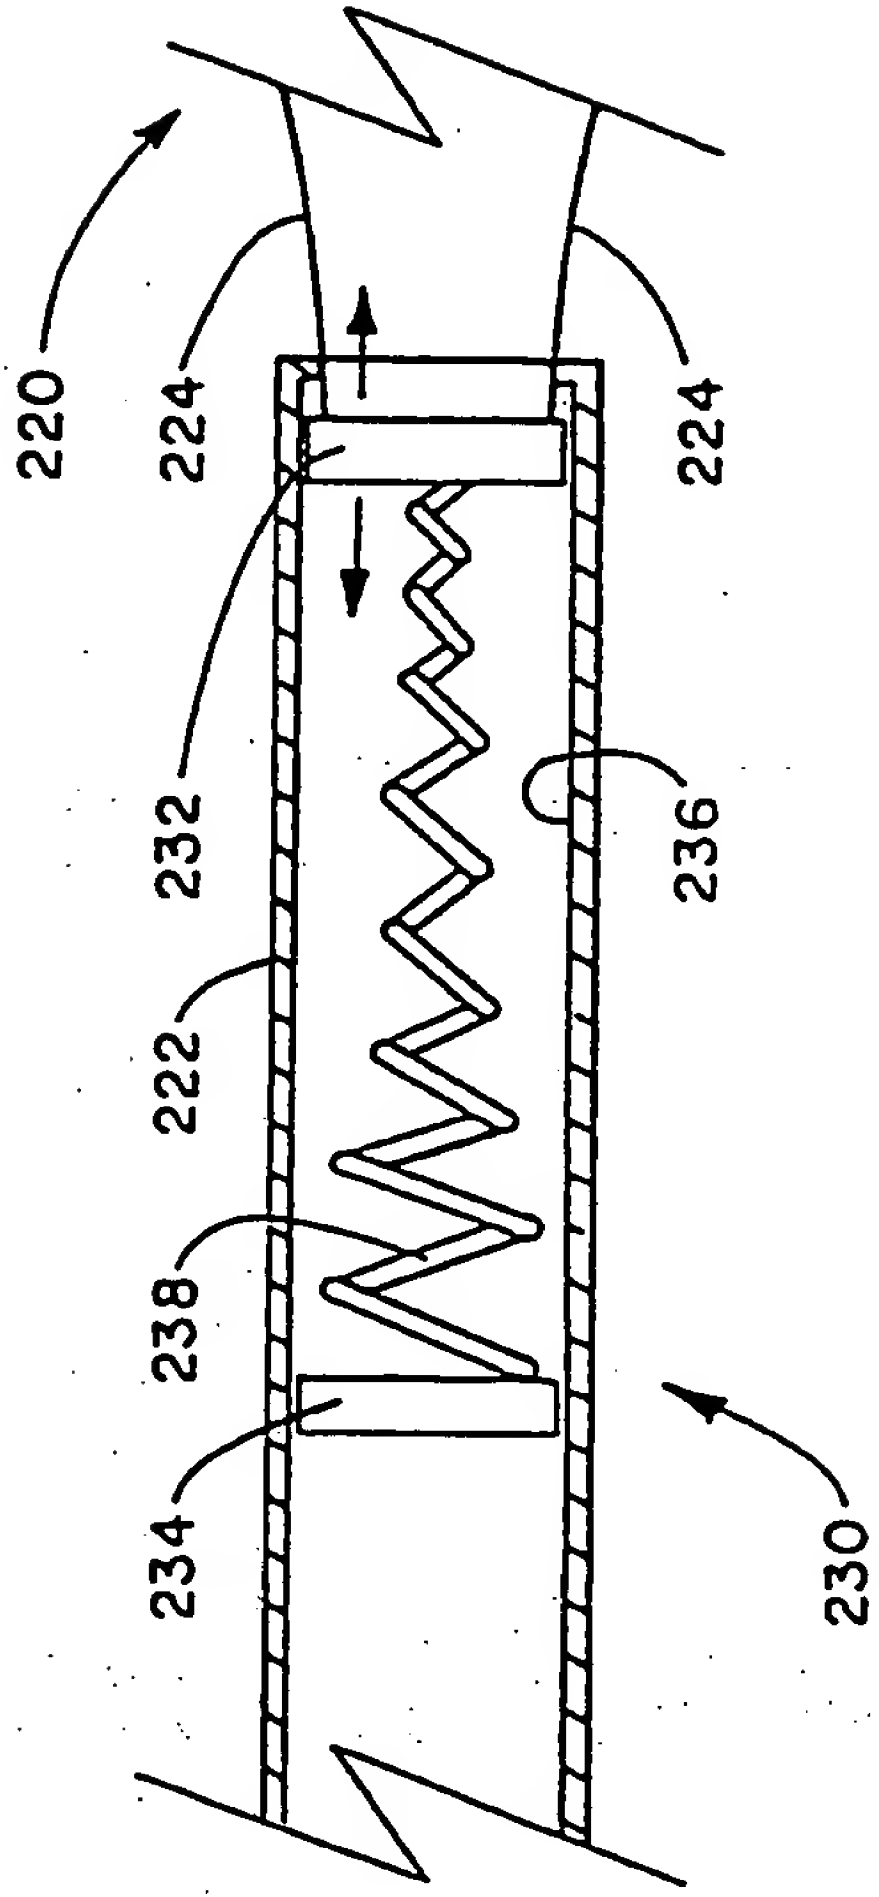


FIG. 36

